



VALVE TECHNOLOGY

PRODUCT OVERVIEW



Further product ranges



Filter technology

- Coarse filtration
- Fine filtration
- Microfiltration
- Heat exchanger



Measuring and control technology

- Flow rate measurements
- Signal processing modules
- Switch cabinet construction
- Pressure transmitter
- Temperature measurements



Single-Use-Systems

- pre-assembled sets or individual components
- brand-independent and customized to your requirements
- documentation and quality certificates

CONTENTS

GEFA VALVE TECHNOLOGY | PRODUCT OVERVIEW

Valves	Butterfly valve resilient-seated series K	2
	Butterfly valve with inflatable seat ring type KS9 KS7	8
	Butterfly valve centric type KG 2 KG 4	10
	Butterfly valve PTFE-lined series K	14
	High performance butterfly valve double offset design type HG	20
	High performance butterfly valve triple offset type HGT	26
	Throttle and regulating valve type KGT	32
	Actuation/automation for 90° valves	34
Ball valves	Ball valve 3-piece series DG full/reduced bore	36
	Multiple way ball valve 3-piece series DG	42
	Ball valve 3-piece series DG 1 with orbital weld ends	46
	Flanged ball valve 2-piece type FG	48
	Flanged ball valve 2-piece type FG PFA-lined	52
Gate	Knife gate valve series Domino	56
Non return valves	Non return valve series RF short length	68

All pressure and temperature specifications are maximum application limits, which are influenced by the interaction of all application factors. Therefore, without technical design and without our confirmation, the specifications are without commitment.

BUTTERFLY VALVE

Resilient-seated | series K

Advantages

Centric valve disc with firm, clearance-free disc / stem connection

Very service-friendly:
Very quick change of the seat ring due to the two-piece body design

Complete body is lined with elastomer with the seat ring as a multifunctional sealing element

Can be used for almost all media, from use with acids to the sensitive food and pharmaceutical industries

Control and regulation of processes without hysteresis

Corresponds to the norm EN 593



TECHNICAL FEATURES

Butterfly valve | resilient-seated | series K

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP



1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Variable and exchangeable for any actuator size
- Actuator protection against leakage

2 Two-piece body

Standard face-to-face dimension, very servicefriendly, simple exchange of internal parts only possible because of the two-piece body design.

3 Bearing bush with O-ring seal

4 Primary sealing

Integrated in the seat ring, guarantees the cavity-free and pressure-resistant sealing to the outside, additional labyrinth layout.

5 Seat ring

Multifunctional sealing element, easy to replace, maintenance-free, long service life, tight sealing in the seat, to the flanges and at the stem passage; secure locking in the dovetail, embedded in the body without edge protruding over the flange area.

6 Valve disc and stem

One-piece design, absolutely clearance-free, large free cross-section, minimal pressure loss.

THE TYPES

Butterfly valve | resilient-seated | series K



Type KG 9
DN 50 – DN 300

Type KG 7
DN 50 – DN 300

Type K 19
DN 350 – DN 500

Type K 17
DN 350 – DN 500

Technical data
Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. Two-piece body, self-centring, one-piece disc and stem, bubble-tight up to 16 bar, vacuum-tight.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Technical data
Lug type butterfly valve for installation between flanges EN 1092, DN 50 - DN 150: PN 10/16, DN 200 - DN 300: PN 16, ASME class 150. Two-piece body with threaded cams for a firm flange connection from both sides. The pipeline can be removed from the flange on one side, vacuum-tight.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Technical data
Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. Two-piece body, self-centring, one-piece disc and stem, bubble-tight up to 16 bar, vacuum-tight.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Technical data
Lug type butterfly valve for installation between flanges EN 1092, PN 10, ASME class 150. Two-piece body with threaded cams for a firm flange connection from both sides. One-piece disc and stem, bubble-tight up to 16 bar and vacuum-tight. The pipeline can be removed from the flange on one side.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type K 07
DN 600 – DN 1000

Technical data

Double flanged butterfly valve for installation between flanges EN 1092, PN 6/10. One-piece body in double flange design, suitable for dead-end service. Continuous valve stem, internally connected with the valve disc by dowel pins. The connection is shielded from the medium. Changeable seat ring with additional steel support ring as firm rubber-metal connection in compliance with a solid elastomer thickness of approx. 15 – 17 mm.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type K 08
DN 600 – DN 1200

Technical data

Wafer type butterfly valve for installation between flanges EN 1092-1, PN 6/10/16. One-piece body. Continuous valve stem, internally connected with the valve disc by dowel pins. The connection is shielded from the medium. Changeable seat ring with additional steel support ring as firm rubber-metal connection in compliance with a solid elastomer thickness of approx. 15 – 17 mm.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type K 11
DN 25 – DN 150

Technical data

Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. Two-piece stainless steel body with centring lugs. In compliance with all the advantages of the basic series KG9, this complete stainless steel version is offered for all areas, which also demand a corrosion-free use of the external components. This is the case in the food/beverage industry and in the area of pharmacy, as well as in chemistry and in case of seawater applications.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type KS
DN 80 – DN 500
Seat ring inflatable

Technical data

Wafer type butterfly valve or lug type butterfly valve for installation between flanges EN 1092 PN 10/16 or ASME class 150. Secure shut-off of solids without friction in the seat. Due to the pneumatic pressurisation of the seat ring in position CLOSED, the valve switches without friction and without preload between seat and valve disc. Signs of wear are avoided in this way.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A


DETAILED SOLUTIONS

Butterfly valve | resilient-seated | series K

Seat ring change



1 The actuator remains installed at the upper part of the body. **2** After loosening the two body screws, the lower part of the body is pulled out downwards together with the internal parts. **3** Simply pull the seat ring from the valve disc. **4** Pull the new seat ring onto the valve disc – this is very simple! **5** Press the lower part of the body together with the internal parts and tighten the two body screws. **6 Finished!**

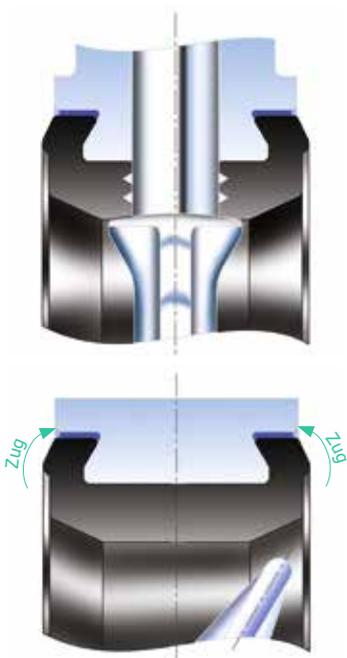

One-piece disc / stem connection – without clearance and hysteresis, cavity-free and cleanable in a sterile way. Bacteria formation due to cavities and all other disadvantages of the “plugged” stem connections can be excluded. The valve disc is implemented in a spherical form for the primary sealing of the stem passage through the seat ring. This ensures a uniform contact pressure of the valve disc sealing surface to the seat ring and thus a more secure surface sealing. A second sealing function is achieved via the additional labyrinth function between the valve disc stem and the seat ring.

Stable, thick-walled dimensioning of the seat ring in the sealing area on the inside and to the edges. The edge-free, rounded passage to the dovetail guide (clamping zone to the flange) ensures a secure locking with high tear resistance. High flow velocities, crust formations and abrasive media are perfectly under control. No formation of bulges on the inside because the seat ring is pulled outwards through the flange clamping into the dovetail.

TECHNICAL DATA

Butterfly valve | resilient-seated | series K

Pressure and temperature range diagram

Control range

20° – 60° opening angle

Vacuum-tight up to 10⁻² mbar

Valves from DN 200

In case of a differential pressure of more than 13 bar, it is necessary to use seat rings with a higher Shore hardness


Valves from DN 600

max. differential pressure 10 bar, available seat ring materials: EPDM and NBR

Lug style body

If it is removed from the flange on one side, max. differential pressure 6 bar

The pressure and temperature range diagram shows the application limits of the different seat ring materials. These limits apply to the intended use. Process variables and characteristics of the medium can influence the values of the diagram. Temperatures below 0 °C upon request.

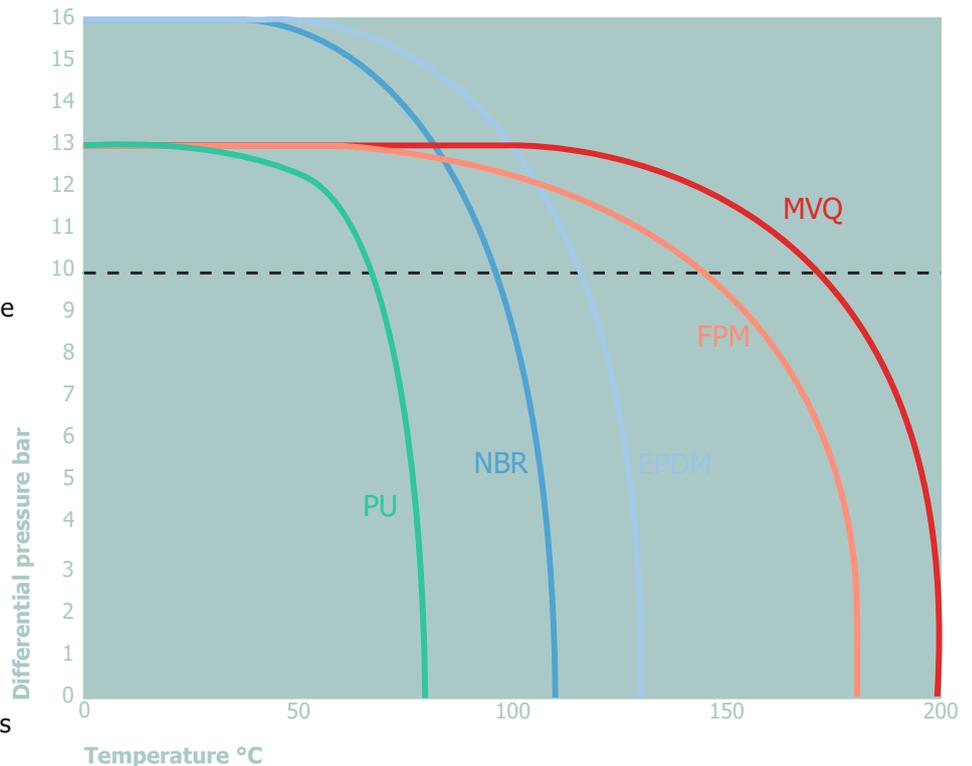

Available materials

Code	Body
22	Grey cast iron GG 25, EN G J L-25
44	Cast steel GS - C 25, EN G P 24 0 H
24	Ductile iron GGG40.3 EN-GJS-400-18-LT
66	Stainless steel 1.4408

Code	Valve disc
66 31	Stainless steel 1.4517
43 69	Stainless steel 1.4517, polished
77 78	Bronze
79 93	Stainless steel 1.4529
94	PTFE-lined
	E-CTFE-coated
	EPDM-rubber lined
	Alloy C 22
	Titanium

EPDM (Ethylene-Propylene-Terpolymer)

Operating temperature: -20 °C to +130 °C

NBR (nitrile rubber)

Operating temperature: -20 °C to +110 °C

MVQ (silicone rubber)

Operating temperature: -30 °C to +200 °C

FPM (fluorine elastomer)

Operating temperature: -10 °C to +180 °C

PU (polyurethane)

Operating temperature: -20 °C to +80 °C

CSM (chlorosulfonated polyethylene)

Operating temperature: -10 °C to +130 °C

Code	Seat ring
E Ew	EPDM
B S V	EPDM white
PU H	NBR
	MVQ (silicone)
	FPM
	PU (polyurethane)
	CSM

BUTTERFLY VALVE

With inflatable seat ring | type KS9 | KS7

Advantages

Low-wear function

Secure shut-off of solids without friction in the seat

The valve opens and closes without seat compression

Very service-friendly: Very quick change of seat ring due to the two-piece body design


Long service life of the seat ring due to its stable thick-walled dimensioning of the elastomer

The valves are available as wafer version (type KS 9) and as lug version (type KS 7)



DETAILED SOLUTIONS

Butterfly valve | with inflatable seat ring | type KS9 | KS7

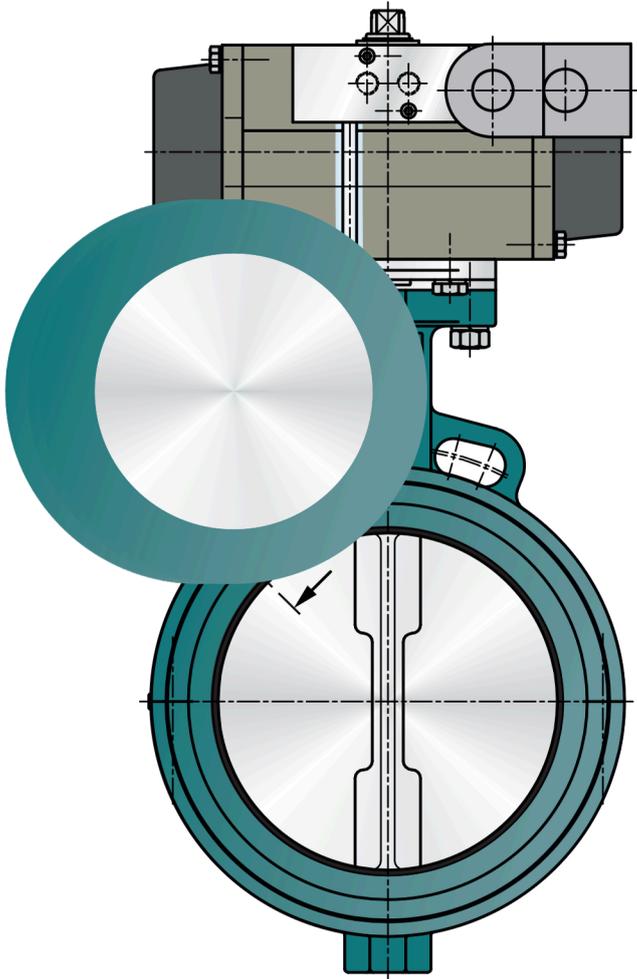


The butterfly valves with inflatable seat ring are preferably used for the shut-off, discharge and dosing of abrasive bulk materials.

Due to the pneumatic pressurisation of the seat ring in position CLOSED, the valve switches without friction and without preload between seat and valve disc. Signs of wear are avoided in this way.

The actuator is designed according to the low running torques of the valve in unloaded condition.

Gentle handling of sensitive media between disc and collar.

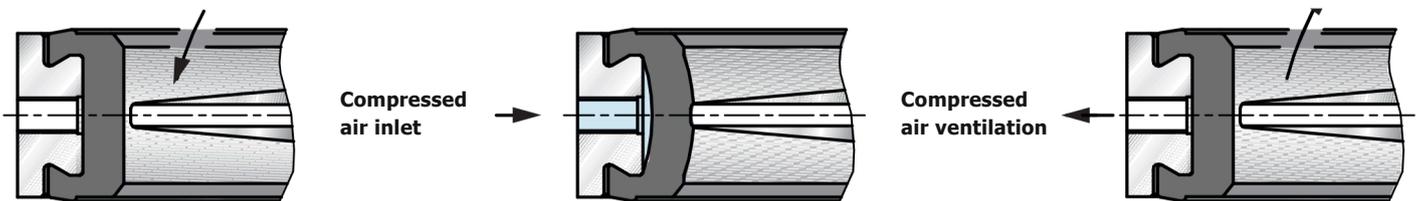

Valve closes without seat compression

Valve closed seat ring pneumatically preloaded and bubble-tight

Valve opens without friction when the seat is unloaded

BUTTERFLY VALVE

Centric | type KG 2 | KG 4

Advantages

Centric butterfly valve for the effective and safe industrial application

Economic equipment with the one-piece body design

Complete body is lined with elastomer with the seat ring as a multifunctional sealing element

Corresponds to the norm EN 593



TECHNICAL FEATURES

Butterfly valve | centric | type KG 2 | KG 4

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP



1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Variable and exchangeable for any actuator size
- Actuator protection against leakage

2 Additional O-ring seal

Seals the stem guide to the outside.

3 Two-piece, anti-blowout stem

Provides a stable bearing of the valve disc.

4 Primary sealing

Integrated in the seat, guarantees a pressure-resistant sealing to the outside, additional labyrinth layout, seals towards the stem.

5 Body

One-piece with centring lugs or threaded cams as flange version.

6 Valve disc

With high all-round finish.

7 Seat ring

Multifunctional sealing element, easy to replace, maintenance-free, long service life, tight sealing in the seat, to the flanges and at the stem passage, secure locking in the dovetail, embedded in the housing without edge protruding over the flange.

8 Seat tightness

An absolute seat tightness up to 10 bar is achieved due to the special design of the valve disc sealing surface.

THE TYPES

Butterfly valve | centric | type KG 2 | KG 4



Type KG 2

DN 50 – DN 500

Technical Data

Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. One-piece body, self-centring, two-piece disc and stem connection, bubble-tight up to 10 bar, vacuum-tight.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Type KG 4

DN 50 – DN 500

Technical Data

Lug type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. One-piece body, self-centring, two-piece disc and stem connection, bubble-tight up to 10 bar, vacuum-tight. The pipeline can be removed from the flange on one side.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Type KG 2/4

DVGW gas

DN 50 – DN 500

Technical Data

Wafer type butterfly valve or lug type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. One-piece body, self-centring, two-piece disc and stem connection, bubble-tight up to 10 bar, vacuum-tight. DVGW-approved for gas according to DIN EN 13774.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

Type KG 2/4

DVGW water DN 50 – DN 500

Technical Data

Wafer type butterfly valve or lug type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150. One-piece body, self-centring, two-piece disc and stem connection, bubble-tight up to 10 bar, vacuum-tight. DVGW-approved for water according to DIN EN 1074-1/-2 DVGW W 270 K T W test KA 0076/12.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A

TECHNICAL DATA

Butterfly valve | centric | type KG 2 | KG 4

Pressure and temperature range diagram

Control range

20 ° – 60 ° opening angle

Vacuum-tight


up to 10-2 mbar(a)

Valves DN 50 to DN 500

max. differential pressure 10 bar

Lug style body

If it is removed from the flange on one side, max. differential pressure = 6 bar

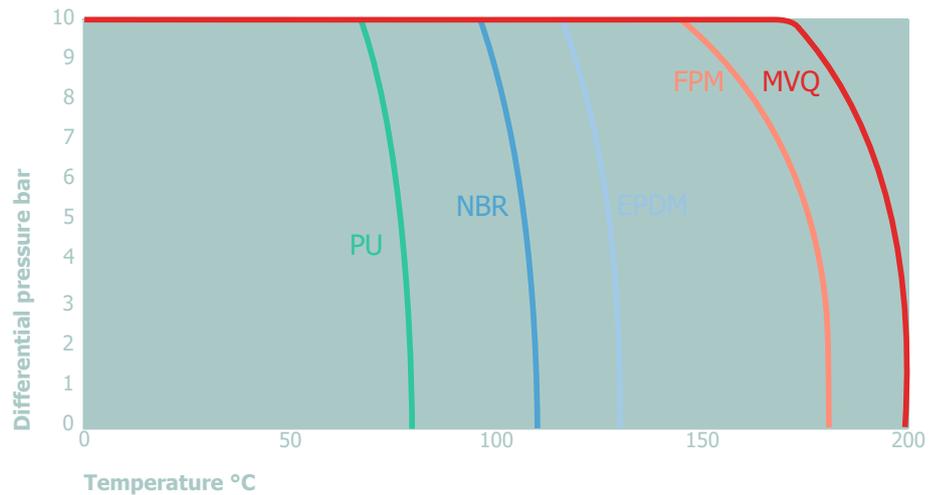

The pressure and temperature range diagram shows the application limits of the different seat ring materials.

Process variables and characteristics of the medium can influence the values of the diagram.

These limits apply to the intended use. Temperatures below 0 °C upon request.

Available materials

Code	Body
22	Grey cast iron GG 25, EN GJL-250
44	Cast steel GS-C 25, EN GP 24 0 H-13
24	Ductile iron GGG40.3 EN-GJS-400-18-LT
66	Stainless steel 1.4408

Code	Seat ring
E Ew	EPDM
B S V	EPDM white
PU H	NBR
	MVQ (silicone)
	FPM
	PU (polyurethane)
	CSM

Code	Valve disc
66 31	Stainless steel 1.4517
43 69	Stainless steel 1.4517, polished
77 78	Bronze
79 93	Stainless steel 1.4529
94	PTFE-lined
	E-CTFE-coated
	EPDM-rubber lined
	Alloy C 22
	Titanium

EPDM (Ethylene-Propylene-Terpolymer)

Operating temperature: -20 °C to +130 °C

NBR (nitrile rubber)

Operating temperature: -20 °C to +110 °C

MVQ (silicone rubber)

Operating temperature: -30 °C to +200 °C

FPM (fluorine elastomer)

Operating temperature: -10 °C to +180 °C

PU (polyurethane)

Operating temperature: -20 °C to +80 °C

CSM (chlorosulfonated polyethylene)

Operating temperature: -10 °C to +130 °C

BUTTERFLY VALVE

PTFE-lined | series K

Advantages

Centric valve disc with firm,
c le aranc e -fre e dis c / s te m
connection

C omple te b o dy is line d with P T FE
(min. 3 mm)

Permanent sealing with full
c he mic al re sis t anc e

Very aggressive and corrosive media
are transported safely

Option: Pharmaceutical version/
cavityfree with smooth PTFE sealing
surfaces to the flange also as
conductive version with FDA approval

Corresponds to the norm EN 593



TECHNICAL FEATURES

Butterfly valve | PTFE-lined | series K

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP



1 Standard mounting flange

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Variable and exchangeable for any actuator size
- Actuator protection against leakage

2 Two-piece body

Standard face-to-face dimension, very servicefriendly, simple exchange of internal parts only possible because of the two-piece body design.

3 Bearing bush with O-ring seal

4 PTFE-seat ring

In solid design (3 mm), diffusion-resistant, ensures a permanent sealing at the stem passage, in the shut-off and to the flanges.

5 Elastomer spring element

Exactly fitted flexible ring of MVQ or EPDM behind the PTFE seat ring ensures flexible sealing of the shut-off.

6 PTFE valve disc

Solid (4 mm) PTFE- / PFA-coated stainless-steel carrier with stem protection in the primary sealing area.

7 Primary sealing

Integrated in the seat ring, guarantees the cavity-free and pressure-resistant sealing to the outside. Pressure is applied by the spring-loaded thrust bearings.



THE TYPES

Butterfly valve | PTFE-lined | series K



Type KG 6
DN 50 – DN 300

Technical Data

Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150.

Two-piece body, selfcentring, one-piece valve disc and stem, bubble-tight up to 10 bar.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type KG 8
DN 50 – DN 300

Technical Data

Lug type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150.

Two-piece body, selfcentring, one-piece valve disc and stem, bubble-tight up to 10 bar.

The pipeline can be removed from the flange on one side.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type K 16
DN 350 – DN 600

Technical Data

Wafer type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150.

Two-piece body, selfcentring, one-piece valve disc and stem, bubble-tight up to 10 bar.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type K 18
DN 350 – DN 600

Technical Data

Lug type butterfly valve for installation between flanges EN 1092, PN 10/16, ASME class 150.

Two-piece body, selfcentring, one-piece valve disc and stem, bubble-tight up to 10 bar.

The pipeline can be removed from the flange on one side.

Face-to-face dimension

DIN EN 558 line 20
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12
Leakage rate A



Type KG 6 / KG 8
DN 50 – DN 300

**Seat ring
PTFE standard**

PTFE standard seat ring of pure PTFE in solid design (3 mm), completely diffusion-resistant.

Elastomer spring element as exactly fitted flexible ring of MVQ or EPDM behind the PTFE seat ring ensures a flexible sealing of the shut-off.

Ensures the permanent sealing at the stem passage, in the shut-off and to the flange s.

Range of application -30 °C to 180 °C depending on the elastomer.

Type KG 6/KG 8
DN 50 – DN 300

**Seat ring
PTFE carbon/
PTFE conductive**

PTFE carbon seat ring as a mixture with a carbon content of 25 % for an increased strength and improved temperature resistance.

PTFE conductive seat ring as a mixture with a carbon content of approx. 1 %.

Ensures the electrical conductivity, which meets the requirements of the ATEX directive.

Range of application -30 °C to 200/180 °C depending on the elastomer.

Type KG 6/KG 8
DN 50 – DN 300

**Seat ring
PTFE pharmaceutical
version**

PTFE seat ring of pure PTFE in solid design (3 mm), completely diffusion-resistant without return at the flange sealing surface.

Therefore, completely cavity-free structure for the use in the food production or in the pharmaceutical area.

Range of application -30 °C to 180 °C depending on the elastomer.

Type KG 6/KG 8
DN 50 – DN 300

**Seat ring
PTFE carbon/conductive
pharmaceutical version**

Seat ring of PTFE carbon in solid design (3 mm), completely diffusion-resistant without return at the flange sealing surface according to the FDA directives.

For the use in the food production and in the pharmaceutical industry, where a conductivity according to the ATEX directive and conformity with the FDA is required.

Range of application -30 °C to 180 °C depending on the elastomer.

DETAILED SOLUTIONS

Process valve | PTFE-lined | series K

Primary sealing

The primary sealing of the stem passage is adjusted to a defined value via the spring-loaded seal system thrust bearing. The medium is already shut off securely at this contact surface (supported by an additional PTFE-flexible sealing) between the primary sealing surface of the valve disc and the preloaded PTFE lining.

The valve stem does not come into contact with the medium. A gas lock at the stem outlet is phased as additional – third – barrier directly behind the primary sealing. This “threefold sealing” ensures the completely tight function to the outside and prevents leakages into the space inside the body behind. This is the most secure and effective method in order to counteract the emissions according to the TA-Luft (German Technical Regulations on Emissions).

The PTFE-lined butterfly valves are already tested and certified according to the standard version of the current directives of the TA-Luft / VDI 2440.

Aggressive and corrosive media are shut off, controlled and regulated safely with the chemical valve – PTFE-lined and centric. The material PTFE ensures an almost unlimited use with full chemical resistance. The minimum material thickness is even exceeded in important areas, in order to ensure a high diffusion resistance. Only two components come into contact with the medium: valve disc and seat ring.

A typical application is the use in the food production and in the pharmaceutical area thanks to the completely cavity-free structure and the physiologically neutral characteristic of the PTFE material when produced in contact with the medium.

The dual spring-loading principle behind the seat ring ensures a permanent sealing in the shut-off.

The sealing function is achieved reliably at the full circumference of the shut-off with the “spring element” elastomer insert behind the PTFE lining.

The primary sealing of the stem passage is spring-loaded separately by means of precisely adjusted disc spring washers.



TECHNICAL DATA

Butterfly valve | PTFE-lined | series K

Pressure and temperature range diagram

Control range

20° – 60° opening angle

Valves DN 50 to DN 500

max. differential pressure 10 bar

Vacuum-tight


DN 50 – to DN 300: up to 1 mbar(a)
from DN 350 to 200 mbar(a) for the
temperature range - 10 °C to + 100 °C

PTFE (polytetrafluorethylene) with EPDM elastomer

Operating temperature: -
20 °C to + 130 °C
with MVQ or FPM elastomer
Operating temperature: up to + 180 °C

PTFE / carbon

(Reinforced polytetrafluorethylene
with a carbon content of 25 % as filler
material) with silicone elastomer
Operating temperature: up to + 200 °C

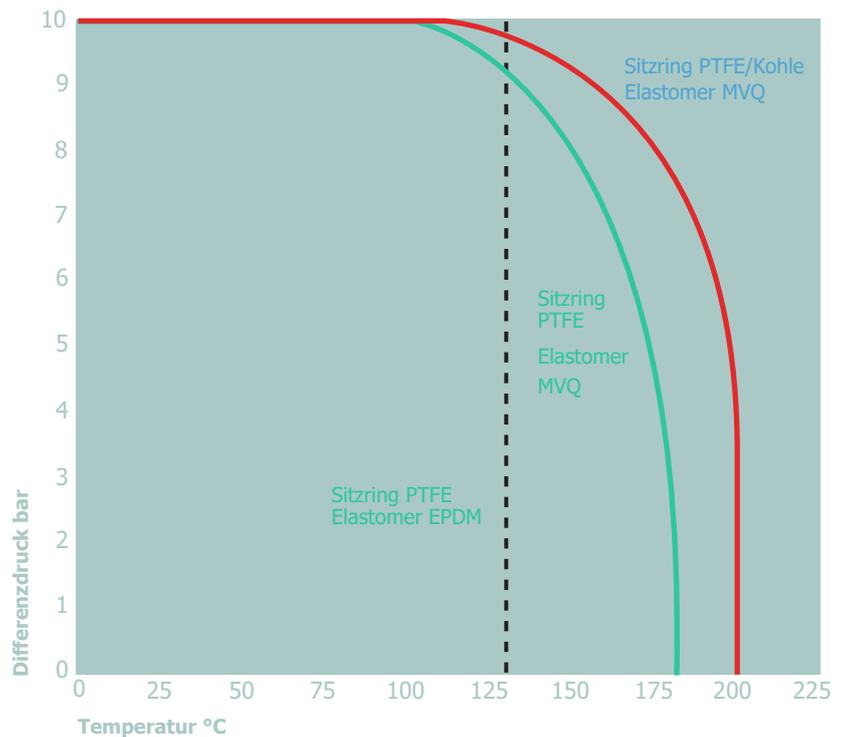

The pressure and temperature range diagram shows the application limits of the different seat ring materials.

The limits apply to the intended use. Temperatures below 0 °C Process variables and characteristics upon request. The medium can influence the values of

Available materials

Code	Body	Code	Valve disc	Code	Seat ring
22	Grey cast iron G G25 / EN G J L-250	66 31	Stainless steel 1.4517	T	PTFE
24	Ductile iron GGG40.3	69 77	Stainless steel 1.4517, poliert	TK	PTFE/carbon
	EN-GJS-400-18-LT	76 75	1.4529	TT	PTFE pharmaceutical version/cavity-free
44	Cast steel G S - C 25 / EN G P 24 0 H+N	93 94	PTFE lined	TL	PTFE, conductive
	Stainless steel 1.4408		PFA lined	TF	TFM
66	Stainless steel 1.4408		PTFE, conductive, lined	U	UHMWPE
6A	Stainless steel 1.4408		Alloy C 22	TLT	PTFE, conductive, cavity-free
			Titanium		

HIGH PERFORMANCE BUTTERFLY VALVE

Butterfly valve double offset design | type HG

Advantages

Reliable sealing against high pressures and low torques due to the double offset design

Low wear with hinge characteristics

Secure stem sealing (Option: TA-Luft)

Variable seat ring materials

GEFA-MULTITOP Efficient automation with variable interface without interruption of the stem

Pivoting angle limitation and optical position indicator at the stem prevent wrong position of the stem during servicing



TECHNICAL FEATURES

Butterfly valve double offset design | type HG

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP



1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Variable and exchangeable for any actuator size
- Actuator protection against leakage

2 Safety (option: TA-Luft)

Stem sealing can be re-tensioned beneath the mounting flange; thus, it can be readjusted without dismantling the actuator.

3 Long service life

The insert ring of the body efficiently protects the seat ring from the direct medium flow and prevents wear such as erosion and abrasion.

4 Reliability

The double offset design with spherical sealing surface at the disc allows switching with minimum wear and offers the highest level of tightness and low torques at the same time.

5 Exact and variable

Face-to-face dimension: EN 558 line 20/25/16

Option: Design with groove / spring EN 1092, form D

6 Precise mounting

Easy mounting due to centring aids for all standard flanges.

7 Service-friendly

The axial centring of the stem can be reached easily and is prepared for later service.

8 Efficient and safe

The cylindrical screws fix the mounting flange without transferring torques (driving torques).

9

The clamping sleeves guarantee a clearance-free connection between the mounting flange and the body and transfer the driving torques.



THE TYPES

Butterfly valve double offset design | type HG



Type HG 1

DN 50 – DN 600

Double offset valve as wafer type butterfly valve for high pressure and temperature loads

Wafer style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

- 50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HG 7

DN 50 – DN 600

Double offset valve with lugs for high pressure and temperature loads

Can be removed from the flange on one side

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

- 50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HG 7 ...BK

DN 50 – DN 600

Double offset valve with lugs for high pressure and temperature loads

Can be removed from the flange on both sides

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

- 50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HGF

DN 50 – DN 600

FireSafe version

Double offset valve for the use in the FireSafe area according to DIN EN ISO 10497, API 607 und BS 6755 Part 2

Wafer or lug style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

- 50 °C to + 450 °C

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000



Type HGC

DN 50 – DN 600
Cryo version

Double offset valve for the use down to - 200 °C with cryogenic stem extension as pressure chamber

Wafer or lug style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 10 ASME CI 150/300, PS25

Temperature range
- 200 °C to + 200 °C

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000



Type HGH

DN 50 – DN 600
Valve with heating jacket

Double offset valve with heating jacket with two chambers connections: flange, welding socket, threaded socket

Technical Data For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
- 50 °C to + 450 °C

Face-to-face dimension
DIN EN 558 line 20 Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000



Type HGHL

DN 50 – DN 600
Welded valve

Double offset valve with double shell for heating without interruption of the pipeline heating.

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
- 50 °C to + 450 °C

Face-to-face dimension
DIN EN 558 line 20 Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000



Type HG1 / 7 L

DN 50 – DN 600
Food

Double offset valve for the use in the food industry according to the regulation EC1935/2004

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
- 20 °C to + 200 °C

Face-to-face dimension
DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000
VO (EG) 1935/2004

DETAILED SOLUTIONS

Butterfly valve double offset design | type HG


The seat ring system

Highly flexible with optimised restoring force

If it is installed in the recommended flow direction, the differential pressure efficiently supports the bubble-tight sealing


Options

- Low temperature seat ring
- S seat ring made of high performance plastics for extreme cases of application

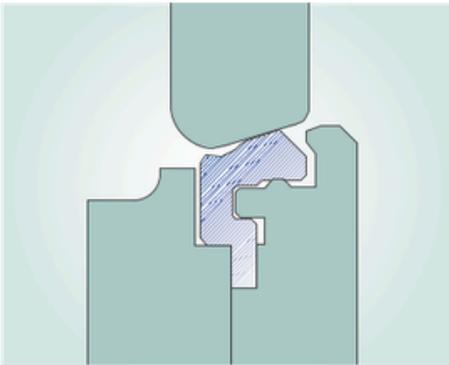


R-PTFE seat ring

Highly flexible design – chemically almost unlimited resistant. Pressure-resistant due to glass fibre reinforcement even at high temperatures. Tightness EN12266, leakage rate A.

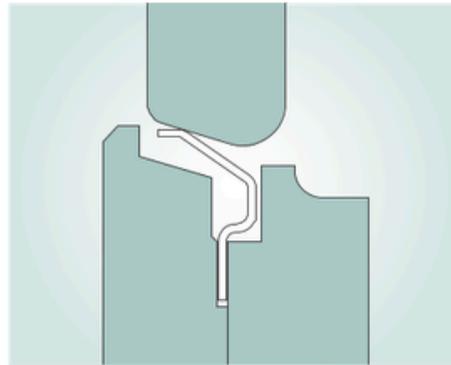

Metal seat ring

Excellent spring characteristics due to the special form. High temperature-resistant due to the seat ring construction of: 1.4571 nitrated, tightness up to + 450 °C, EN12266, leakage rate B.

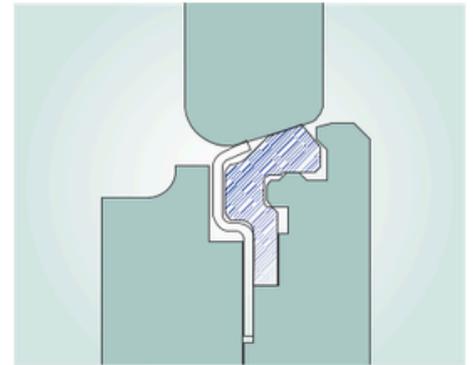

Firesafe seat ring

Double seat PTFE / 1.4571 certified according to EN ISO 10497:2010-06


The double offset design

The double offset design allows a reliable, almost wear-free shut-off. Due to the double displacement of the pivot, the valve disc is lifted from the seat at the beginning of the opening movement. The seat is then free from heavy pressure over the whole circumference.

The 90 ° turning is frictionless at even reduced torques.

The design characteristics allow an extremely long functional life – even at high switching frequencies. The recommended pressure direction (arrow mark at the body) ensures complete tightness.




The active pressure (differential pressure) of the medium additionally supports the sealing function via the pressing effect of the seat ring against the sealing surface of the disc. The insert ring and the body additionally protect the flexible seat ring efficiently against negative flow influences.

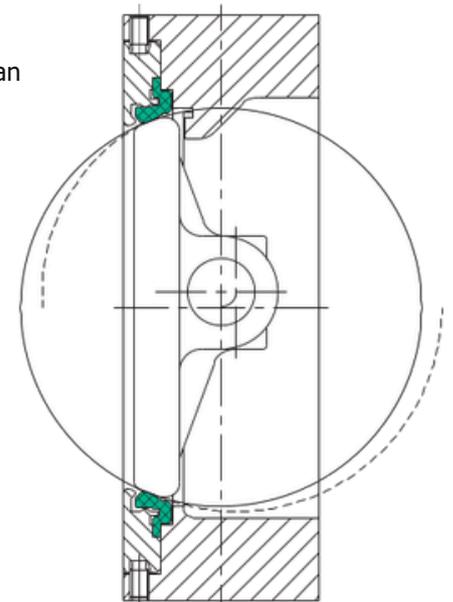

TECHNICAL DATA

Butterfly valve double offset design | type HG

Pressure and temperature range diagram

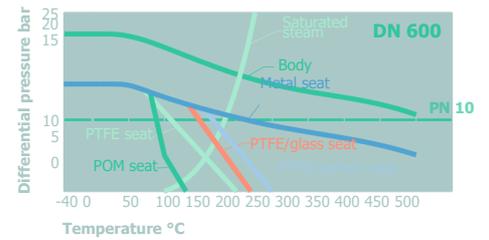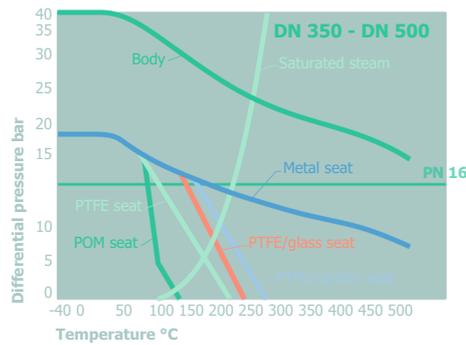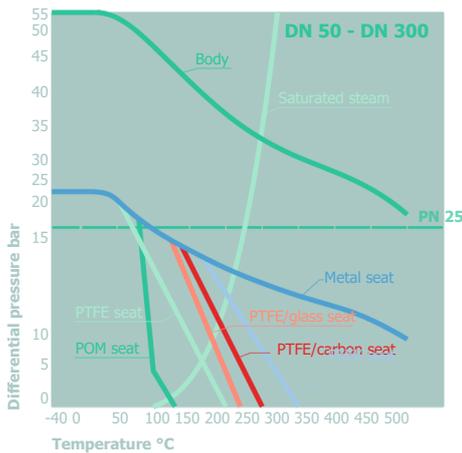

Control range

20 ° – 60 ° opening angle

Vacuum-tight

up to 1 mbar (a)

Flange surfaces

according to DIN EN 1092-1 form B1

The pressure and temperature range diagram shows the application limits of the different seat ring materials. These limits apply to the intended use. Process variables and characteristics of the medium can influence the values of the diagram. Temperatures below -50 °C upon request.

Nominal size	Nominal pressure	max. operating pressure
DN 50 – DN 300	PN 10/16/25/40 A N SI 150/300	25 bar
DN 350 – DN 500	PN 10/16/25 A N SI 150 PN 10/16	16 bar
DN 600 – DN 1000	A N SI 150	10 bar

The maximum operating pressure depends on the operating temperature.



	Position Designation Material								
	≤ DN 300 ≥ DN 350	HG 4466 TG HG 4444 TG	HG 6666 TG	HG 4435 M HG 4444 M	HG 6635 M	HG 4435 HM HG 4444 HM	HG 6635 HM	HGF 4466 TM	HGF 6666 TM
max. operating temp.	+ 220 °C	+ 220 °C	+ 220 °C	+ 220 °C	+ 220 °C	+ 450 °C	+ 450 °C	+ 200 °C	+ 200 °C
1	Body	1.0619	C 1.4408	1.0619	1.4408	1.0619	1.4408	1.0619	C 1.4408
2	Valve disc ≤ DN 300 ≥ DN 350	1.4408 1.0619/ nickel-plated	1.4408 1.4408	1.4408/ nitrated 1.0619/ nickel-plated	1.4408/ nitrated 1.4408/ nitrated	1.4408/ nitrated 1.0619/ nickel-plated	1.4408/ nitrated 1.4408/ nitrated	1.4408/ nitrated 1.0619/ nickel-plated	1.4408 1.4408
3	Welle	1.4571	1.4571	1.4571	1.4571	1.4571	1.4571	1.4571	1.4571
4*	Seat ring	PTFE/Glas	PTFE/Glas	1.4571/ nitrated/ Graphite**	1.4571/ nitrated/ Graphite**	1.4571/ nitrated/ Graphite**	1.4571/ nitrated/ Graphite**	PTFE/1.4571/ nitrated+ Graphite	PTFE/1.4571/ nitrated+ Graphite
5	Bearing bush	1.4401/PTFE	1.4401/PTFE	1.4401/PTFE	1.4401/PTFE	1.4571/nitrated	1.4571/nitrated	1.4571/nitrated	1.4571/nitrated
6*	Package	PTFE	PTFE	PTFE	PTFE	Graphite	Graphite	Graphite	Graphite
7	Insert ring	C-steel	1.4571	C-steel	1.4571	C-steel	1.4571	1.4571	1.4571

* Spare part / wear part, **Option: 1.4571 / nitrated / PTFE

HIGH PERFORMANCE BUTTERFLY VALVE

Triple offset | type HGT

Advantages

Tight shut-off in both pressure directions

Temperature range up to + 450 °C

Friictionless sliding to the laminated seat

Installation of the laminated seat in the body

Secure stem sealing (Option: TA-Luft)

GEFA-MULTITOP

Efficient automation with variable interface without interruption of the stem

Pivoting angle limitation and optical position indicator at the stem prevent wrong position of the stem during servicing



TECHNICAL FEATURES

High performance butterfly valve | triple offset | type HGT

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP



1 Automation

- Standardized mounting flange acc. to DIN3337/ISO5211
- Direct mounting of actuator, allowing correct alignment
- Variable topworks arrangements, allowing for different actuator sizes to be mounted

2 TA-Luft tested safety (optional)

Adjustable stem sealing, located below the top flange, allowing adjustment without removing the actuator.

3 Long service life

The insert ring, mounted with its orientation against the direction of flow, actively protects the integrated laminated seat/seal from premature erosion and wear, providing longer service life and reduced costs and downtime.

4 Insert ring

Pressure-sealed bolted design – located outside of the flange sealing surface according to TA-Luft.

5 Reliability

Due to the design of the seat, triple offset valves are torque-seated. Therefore the actuator torque is constantly used to ensure contact pressure between the seating surfaces. This is necessary to provide zero leakage performance.

6 Exact and variable

Face-to-face dimension: EN 558, line 20 (25/16)

7 Bearing

- Stem bearings absorb adverse loads and securely support the stem
- Continuous secured stem guidance provides maximum support for the single-piece shaft constructed of high-tensile materials

8 Precise mounting

Simple and precise mounting using wafer body location holes for all face-to-face dimensions.

9 Axial securing

Axial securing device and hardened axial securing ring ensure perfect stem and disc alignment, positioned away from the medium and built into the bottom flange.



THE TYPES

High performance butterfly valve | triple offset | type HGT



Type HGT 1

DN 80 – DN 300

Triple offset valve as wafer type butterfly valve for high pressure and temperature loads

Wafer style

Technical Data

Flange connection between flanges
EN 1092, PN 10/16/25/40, PS 25, ASME Cl 150/300, PS25

Temperature range

- 50 °C to + 450 °C

Vacuum: up to 1 mbar (abs)

FireSafe according to: DIN EN ISO 10497 and API 607

Face-to-face dimension

DIN EN 558 line 20

Optional: line 25 and line 16

API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000



Type HGT 7

DN 80 – DN 300

Triple offset valve with lugs for high pressure and temperature loads

Can be removed from the flange on both sides

Technical Data

Flange connection between flanges
EN 1092, PN 10/16/25/40, PS 25, ASME Cl 150/300, PS25

Temperature range

- 50 °C to + 450 °C

Vacuum: up to 1 mbar (abs)

FireSafe according to: DIN EN ISO 10497 and API 607

Face-to-face dimension

DIN EN 558 line 20

Optional: line 25 and line 16

API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

DETAILED SOLUTIONS

High performance butterfly valve | triple offset | type HGT



Laminated seat

The laminate disc/stainless steel/graphite seat ensure bidirectional, zero leakage shut-off throughout the full temperature range of - 50 °C to + 450 °C.

- Bidirectional zero leakage shut-off
- Metal-Metal, frictionless non-interference disc operation
- Continuous smooth jam-free operation due to the offset angle of the sealing surface
- Laminated seat/seal system, made of stainless steel/graphite
- Seat/seal system integral to valve body – not on the disc
- The insert ring, mounted against the direction of flow, actively protects the laminated seat/seal system against wear.
- Additionally the laminated seat will not wear prematurely as it is common with laminated disc seal systems.
- The flexible metal laminated seat/seal is securely fastened by the insert ring positioned in front. The floating, self-centred design of the laminate seat/seal system ensures accurate mounting in the valve body.
- When re-seating the disc, the laminated seat/seal system self-centres to the disc.
- The elasticity of the laminated seat/seal system ensures uniform peripheral sealing with the disc.
- Zero leakage acc. to DIN EN 12266-part 1, leakage rate A as well as low torques and continuous smooth operation.



Bearing


Stem bearings absorb adverse loads and securely support the stem.

Continuous secured stem guidance provides maximum support for the single-piece shaft constructed of high tensile materials

DETAILED SOLUTIONS

High performance butterfly valve | triple offset | type HGT

The triple offset principle

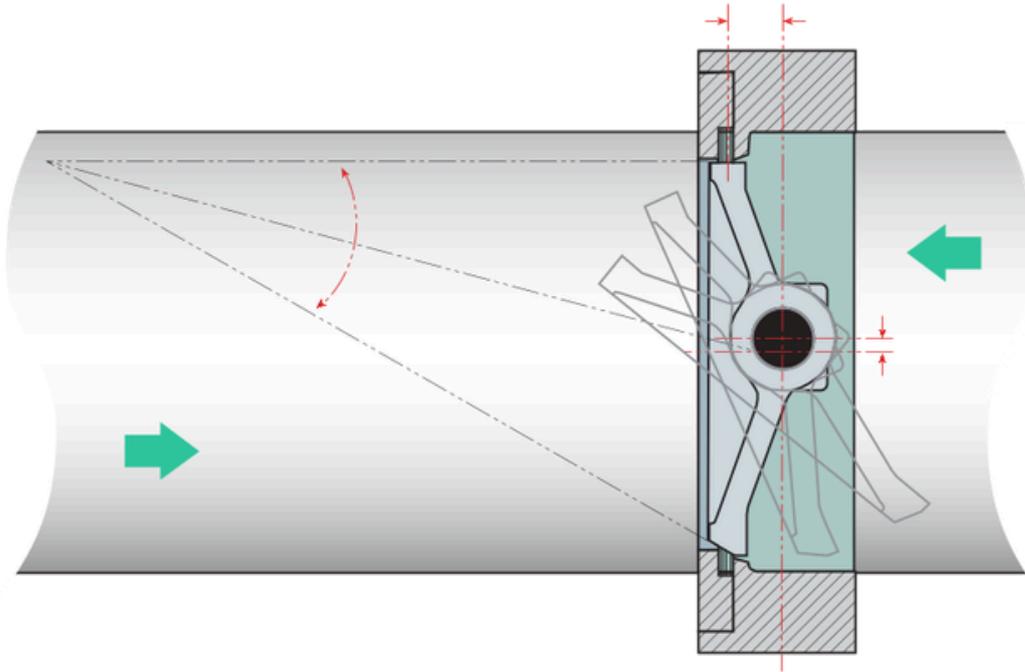

The triple offset butterfly and regulating valves are the advancement of the double offset technology.

In addition to the described double displacements of the sealing surface from the stem pivot, the third eccentricity is achieved by the displacement of the axial symmetry of the sealing surfaces (the seat axis is displaced from the tube axis).


As a cubic body, the cone is the starting point for this function.

The cone is not cut in the straight, centric level, but e.g. (as shown on the schematic drawing), at a right angle to the external bodyline.

The valve disc is not switched to the seat through this gate until the last possible moment. The contact of the two sealing surfaces takes place without friction and without jamming. This design principle ensures a low switching torque with high pressures and temperatures at the same time.

Cone

The cone section is the basis for the function of the third eccentricity.

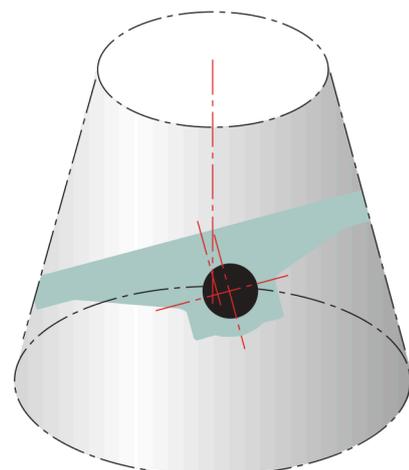

TECHNICAL DATA

High performance butterfly valve | triple offset | type HGT

Pressure and temperature range diagram

Control range

20 ° – 60 ° opening angle

Vacuum-tight


up to 1 mbar (a)

The pressure and temperature range diagram shows the application limits of the metal / graphite seat ring.

These limits apply to the intended use.

Process variables and characteristics of the medium can influence the values of the diagram.

Valve for temperatures below - 50 °C:
upon request.

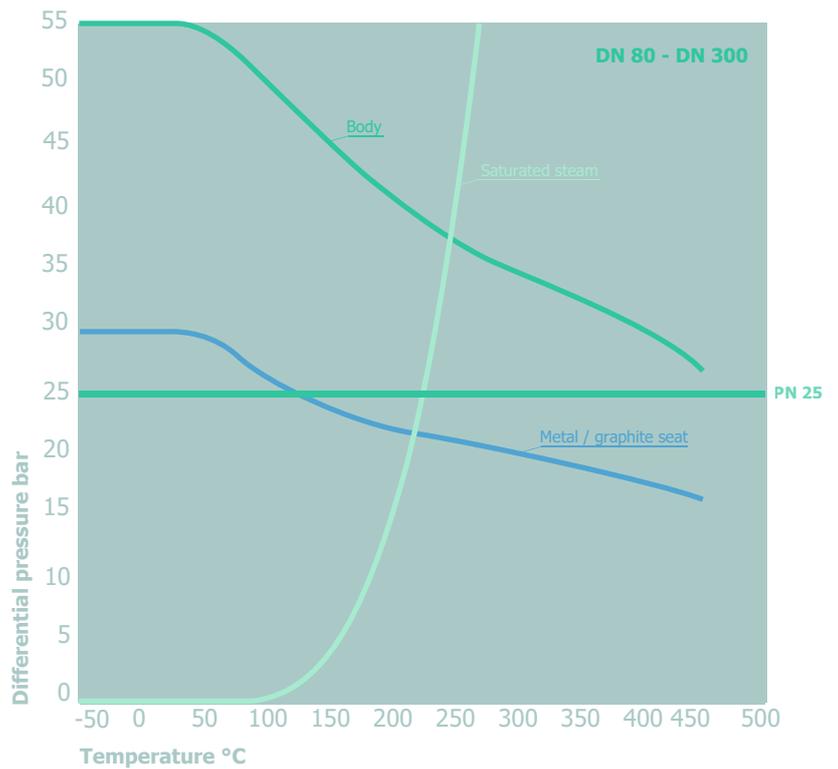

Available materials

Designation	Material	
	HGT 4435 MG	HGT 6635 MG
Body	1.0 619	1.4408
Valve disc	1.4408, hardened	1.4408, hardened
Stem	1.4542	1.4542
Seat ring*	Laminated 1.4571 / Graphite	Laminated 1.4571 / Graphite
Bearing bush	1.4571, nitrated	1.4571, nitrated
Packing ¹⁾	Graphite	Graphite

* Spare part/wear part

¹⁾ Alternative: PTFE / LATTYflon (TA-Luft) / graphite TA-Luft approved

Pressure class/max. working pressure		
Nominal size	Nominal pressure	max. working pressure
DN 80 - DN 300	PN 10 / 16 / 25 / 40 ASME class 150 / 300	25 bar

The maximum operating pressure depends on the operating temperature.

Flange surfaces

according to DIN EN 1092-1
form B1

THROTTLE AND REGULATING VALVE

Triple offset | type KGT

Advantages

Good control behaviour

Throttle valve completely made of stainless steel 1.4408

Smooth surfaces due to precision casting technology

Inner contour additionally processed in a clean mechanical way

Direct mounting of all actuators – efficient and safe



TECHNICAL DATA

Throttle and regulating valve | type KGT

Type KGT

DN 80 – DN 250

Technical Data

Wafer type butterfly valve for installation between flanges EN 1092, PN 10, one-piece body with centring lugs, end-to-end valve stem, flat disc design with excellent flow characteristics.


Face-to-face dimension

EN 558 line 20

Mounting flange

EN ISO 5211

The setting range 0° – 70° is used for normal operation. In the area of 20° – 60°, the valve has an almost linear flow characteristic curve.

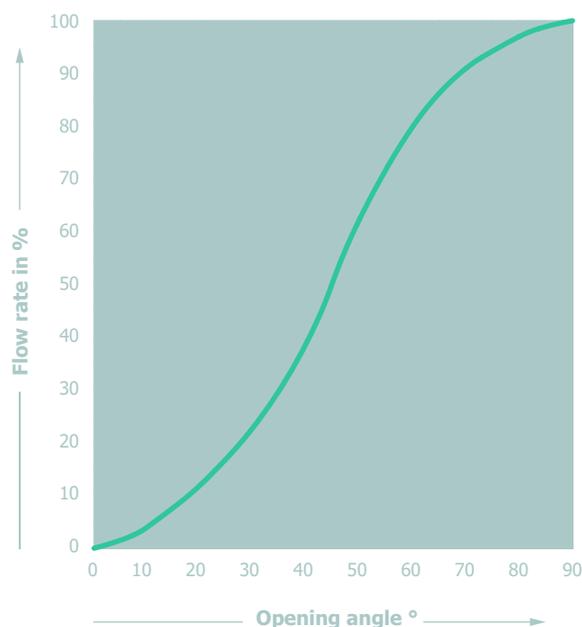

Technical Features	
Available nominal sizes	DN 80 – DN 250
Installation between flanges	EN 1092, PN 10
max. differential pressure Δp	8 bar
Leakage rate in position CLOSED	1 – 2 %
max. temperature	180 °C

DN	kvs 90°
80	520
100	850
150	1.900
200	3.200
250	5.500

ACTUATION / AUTOMATION

90 ° valves

GEFA automates all offered valves with devices from our own range of products or according to customer requests and specifications

Advantage:

Efficient processing and delivery of complete functional units, which are adjusted technically to one another and are tested with regard to proper functioning prior to delivery



THE TYPES



Hand lever

Aluminium or stainless steel, notch plate made of steel, galvanised or stainless steel



Worm gear with handwheel

Aluminium, grey cast iron, stainless steel, marine version/C5M



Pneumatic actuator

Double-/single acting with safety position in case of energy/compressed air failure, optional end position adjustment OPEN/CLOSE, high temp. version/low temp. version, stainless steel/C5M, ATEX, SIL



Solenoid valves

3/2 -5/2-ways, 5/3-ways optionally with air choke, throttle block, quick exhaust valves, ATEX, SIL



Electro-pneumatic positioner

Options: analogue/digital diagnostics software Industrie 4.0, ATEX, SIL



Limit switch

Mounted limit switches or inductive proximity switches, ASI-Bus, ATEX, SIL



Electric actuators (on/off and modulating) For OPEN/CLOSE function, latching and normal operation (option: normal operation with variable speed), Profibus, ATEX, SIL

Subject to technical modifications



End position feedbacks

Housing made of aluminium/plastic/VESTAMID/stainless steel with optical position indicator, mechanic SPDT switches OPEN/CLOSE, inductive proximity sensors, slot ted proximity sensors, REED contacts, ASI-Bus, ATEX, SIL

BALL VALVE

Full/reducedbore|3-piece|series DG


Advantages

Proven and reliable ball valve even in case of high pressures

Very service-friendly:
Very quick replacement of seals due to the center section, which can be swivelled out


For applications with corrosive media the DG-valves can be supplied in material 1.4529

The ball valves can be adjusted to your applications and requirements due to the wide range of end connectors

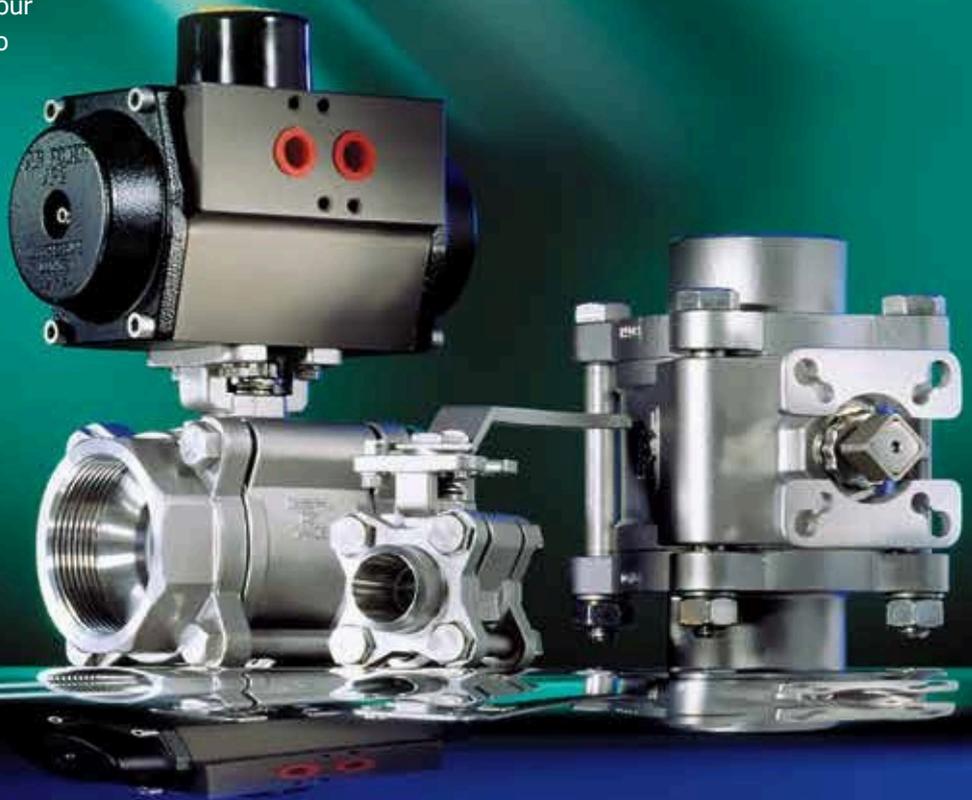

TECHNICAL FEATURES

Ball valve | full/reduced bore | 3-piece | series DG

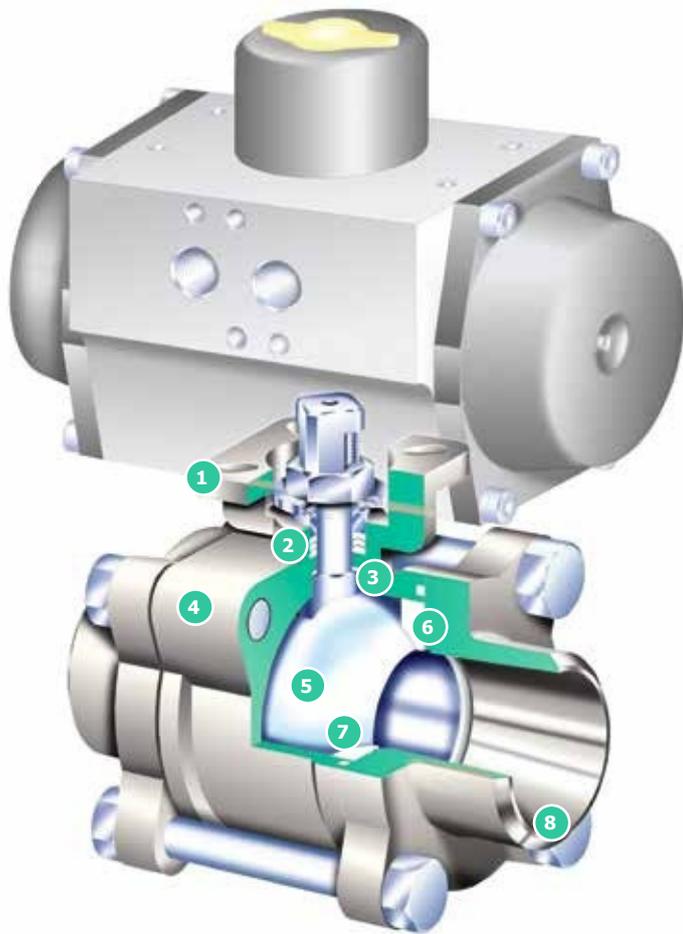

1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Pneumatic, electric or manual actuation possible

2 Safety

Low-maintenance due to spring-loaded V-rings made of PTFE or graphite packing. Optional: TA-Luft

3 Primary sealing

Together with the complex design of the anti-blowout stem, the internal seal ensures a leakage-free application, even in case of a high number of cycles.

4 Service-friendly and exact

The center section is guided through the fully centred screw guidance to the correct position at the flanges.

5 Shut-off valve

The surface of the ball is high-gloss polished and extremely accurate (roundness)

6 Body seal

Secure sealing due to the separate, fully encapsulated body seal.

7 Seat ring

Completely leak-tight in the bore due to the special form of the seat rings. The preload of the seat rings causes a spring effect, which results in a reliable sealing in all pressure ranges. Materials: PTFE, PTFE/glass, PTFE/carbon, PEEK, UHMWPE, POM, PVDF.

8 Variable end connectors

- Butt weld end, short
- Butt weld end, long
- Orbital weld ends
- Threaded end / female thread / NPT
- Full bore / reduced bore
- Welding flanges

THE TYPES

Ball valve | full/reduced bore | 3-piece | series DG



Series DG 1 type 2

Shortbutt weld ends
DN8 – DN150

Full and reduced bore

Technical data Ball valve for welding, short version, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Pipe dimensions Can be adapted to customer specifications.

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG 1 type 3

Threaded ends
DN8 – DN100

Full and reduced bore

Technical data Ball valve with female thread ends according to DIN 2999-Rp (pipe thread), ISO 228/1-G or NPT, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG 1 type 7

Longbutt weld ends
DN8 – DN50

Full bore

Technical data Ball valve for welding, long version, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Special features
No disassembly necessary for welding.

Pipe dimensions Can be adapted to customer specifications.

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG 1 type 1

Welding flanges
DN8 – DN150

Full and reduced bore

Technical data Ball valve for installation between flanges according to DIN EN 1092 or ASME, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Face-to-face dimension
EN 5581 line 1 (DIN 3202F1)
Other face-to-face dimensions are possible.

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG 1 type 8

ORBITAL weld ends
DN8 – DN100

Full bore

Technical data Ball valve for welding in ORBITAL welding process, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Special features

For the application with ultra-clean media.

Pipe dimensions

Can be adapted to customer specifications.

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG 5

Version with almost no cavities
DN8 – DN100

Full and reduced bore

Technical data Ball valve with seat rings filling the cavities, 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Special features

Can be combined with all kinds of end connectors.

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG F

Firesafe version
DN8 – DN100

Full and reduced bore

Technical data Ball valve with Firesafe approval according to BS6755-2, 3-piece body, pressure class depending on the nominal size up to PN 40, floating ball, vacuum-tight.

Special features

Can be combined with all kinds of end connectors. Functional safety due to metallic emergency sealing. No disassembly necessary for welding.

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10,P11,P12
Leakage rate A



Series DG H

Heating jacket
DN8 – DN150

Full and reduced bore

Technical data Ball valve with heating jacket for all common heating media (pressure $p_{max} = 20$ bar), 3-piece body, pressure class depending on the nominal size up to PN 125, floating ball, vacuum-tight.

Special features Can be combined with all kinds of end connectors. For constant temperatures in the interior of the valve.

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10,P11,P12
Leakage rate A

DETAILED SOLUTIONS

Ball valve | full/reduced bore | 3-piece | series DG

The Firesafe principle




If PTFE sealed valves are exposed to flames in case of fire, this may cause the melting of the sealing materials, which will inevitably result in leakages to the outside and in the bore. In order to be suitable for these requirements, the ball valve DGF is equipped with a special sealing system.

The stem packing as well as the body seal are made of graphite in order to also withstand high temperatures. Due to the groove and tongue system of the end connector and of the body, the encapsulated body seals are safely pressed and the tightness of the valve to the outside remains ensured.


The contour of the end connectors to the ball are designed in a way, that the ball will press against a metallic sealing edge, if the seat ring melts and that an emergency sealing function is achieved in the passage.

Option: Pressure relief bore

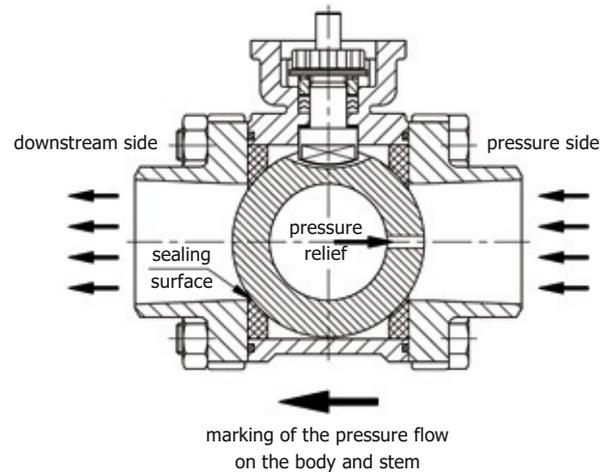

If liquid and thus not compressible media are transported, the pressure in the cavity of the ball valve may increase considerably in case of an increase in temperature. This may be the case, e.g. in case of liquid and thus cold CO₂. The pressure relief bore ensures that the space between ball and body is connected with a pipeline section and that the pressure in the cavity can never increase above the pipeline pressure. As standard, the pressure relief bore is made from the convex surface of the ball to the ball bore. As an alternative it is also possible to make the pressure relief bore towards the stem. In this case, however, there will only be a pressure relief in the passage position of the ball.

Option: Passage with few cavities

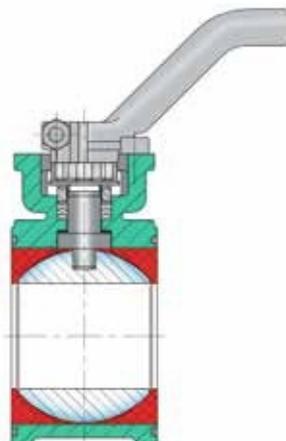



In order to prevent product residues and to prevent the interior from running completely empty, the seat rings filling the cavities enclose the ball and fill the otherwise present cavity.

All common compounds are available as seat ring materials.

TECHNICAL DATA

Ball valve | full/reduced bore | 3-piece | series DG

Pressure and temperature range diagram

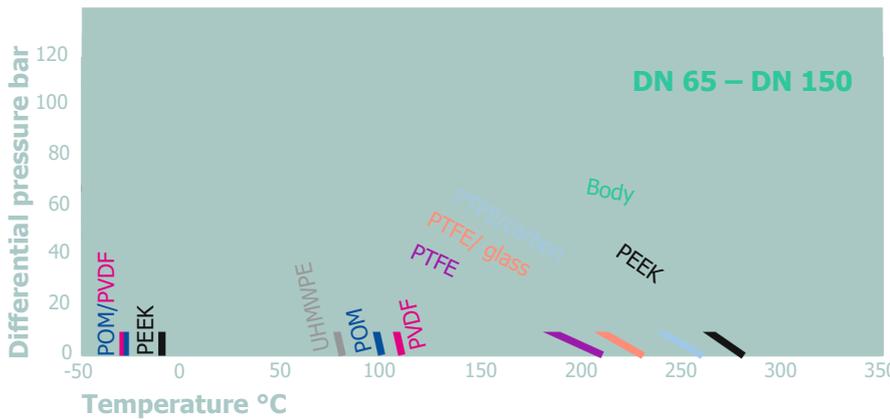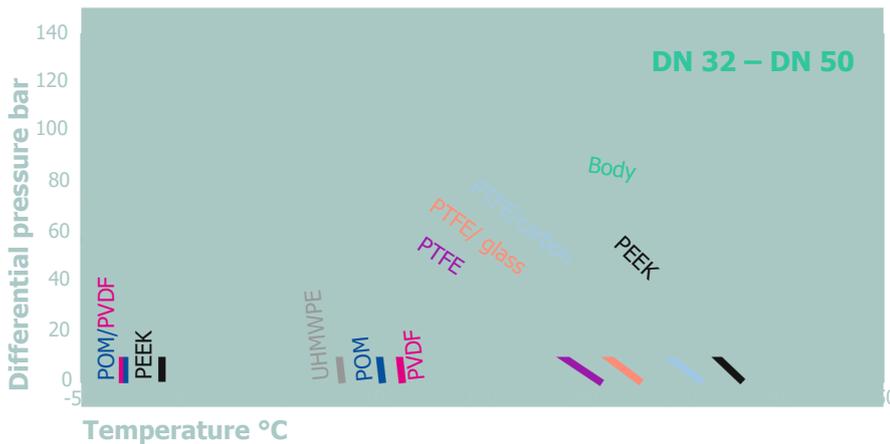

Designation	Material
Stainless steel body	1.4408
Stainless steel ball	1.4408
Stem	1.4542 (17-4PH)
End connectors	Stainless steel 1.4408 Stainless steel 1.4529 Stahl 1.0619 (GS-C25)
Seat and body rings	PTFE/glass PTFE/carbon PTFE PEEK UHMWPE POM PVDF

All pressure and temperature specifications are maximum application limits, which are influenced by the interaction of all application factors. Therefore, without technical design and without our confirmation, the specifications are without commitment.

MULTIPLE WAY BALL VALVE

3-piece | series DG

Advantages

Variable used due to different ball types and connections

Manual or automatic version available

Vertical or horizontal connection possible



Cost-effective because standard components of the ball valve DG are used

Service-friendly due to 3-piece design



TECHNICAL FEATURES

Multiple way ball valve | 3-piece | series DG

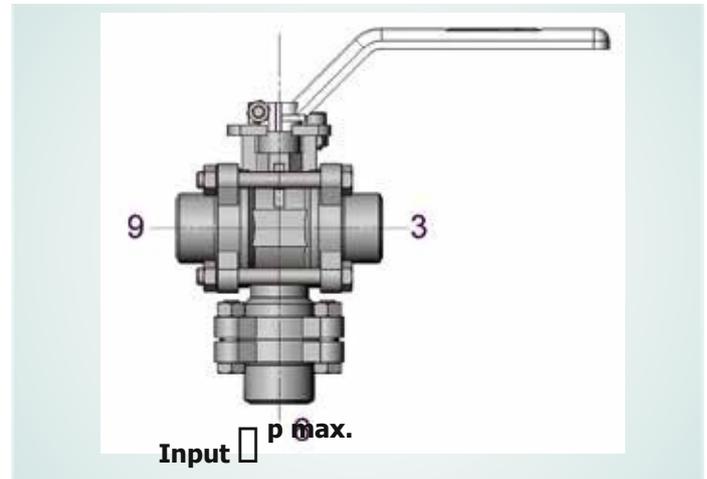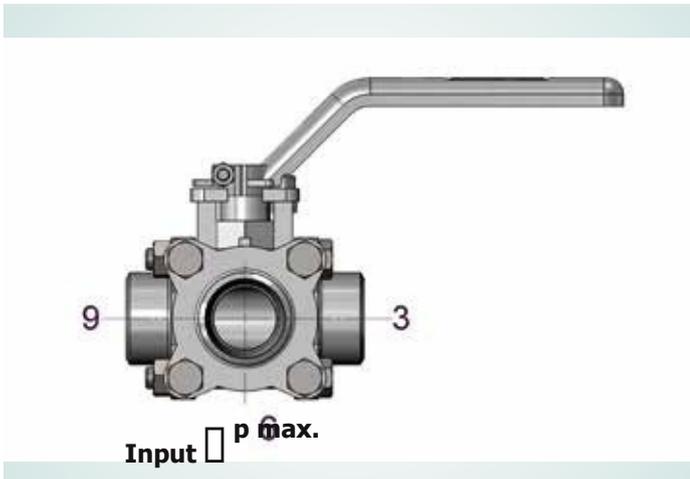

Series DG 3

DN8 – DN65

3-way ball valve
Horizontal design
Full and reduced bore

Technical data

Pre s sure c las s up to PN4 0
Materials and basic version
correspond to the series DG1

Special features

Can be combined with all end connectors

Mounting flange

DIN EN ISO 5211

Switching function

L-bore, T-bore

Series DG 4

DN8 – DN65

3-way ball valve
Vertical design
Full and reduced bore

Technical data

Pre s sure c las s up to PN4 0
Materials and basic version
correspond to the series DG

Special features

Can be combined with all end connectors

Mounting flange

DIN EN ISO 5211

Switching function

L-bore, T-bore, LL-bore, TL-bore


TECHNICAL FEATURES

Multiple way ball valve | 3-piece | series DG 3


Switching functions DG 3




L-bore, 0 °, 90° turning

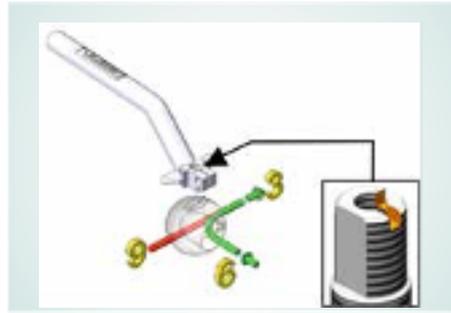


L-bore, 90 °, 90° turning

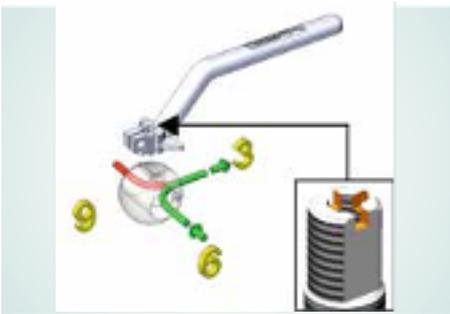

T-Bohrung, 0 °, 90° turning

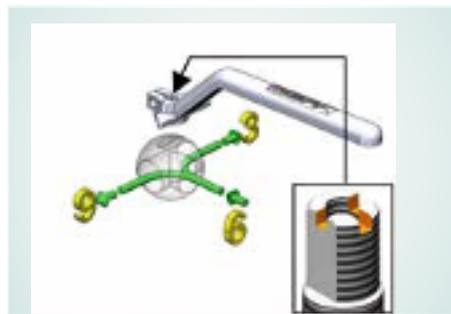

T-Bohrung, 90 °, 180° turning

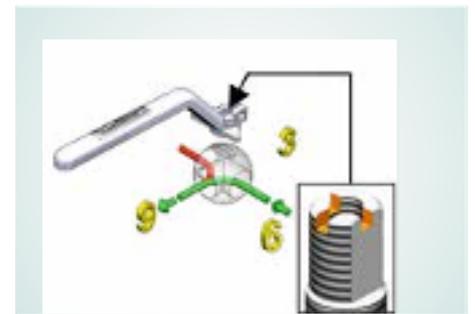


T-Bohrung, 180 °, 180° turning


TECHNICAL FEATURES

Multiple way ball valve | 3-piece | series DG 4


Switching functions DG 4

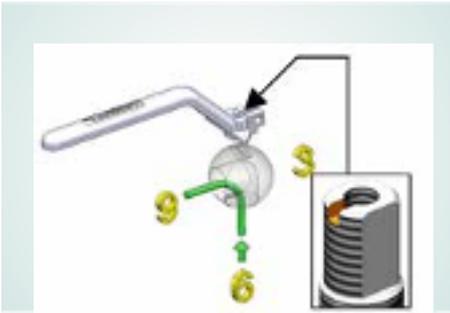

L-bore, 0 °, 180° turning

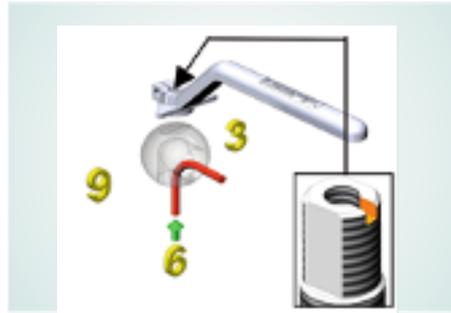

L-bore, 90 °, 180° turning

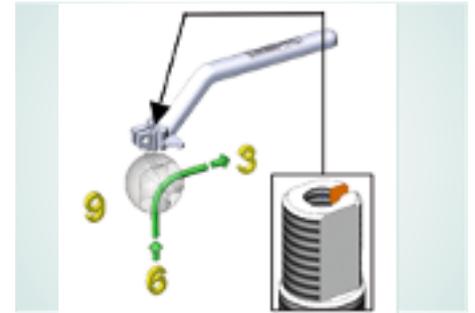


L-bore, 180 °, 180° turning




T-bore, 0 °, 90° turning




T-Bore, 90 °, 90° turning

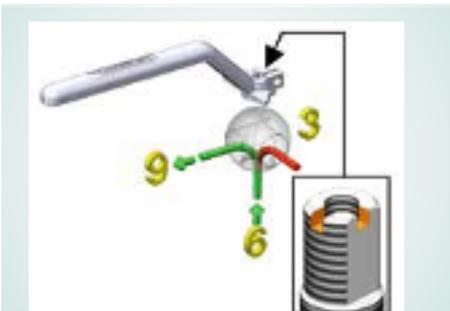

LL-bore, 0 °, 90° turning

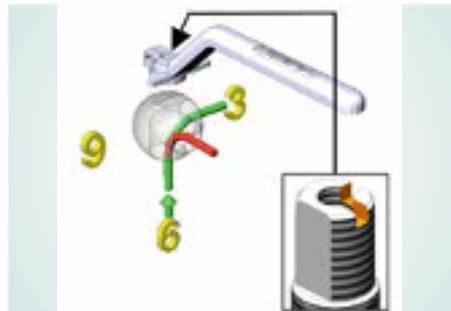

LL-bore, 90 °, 90° turning

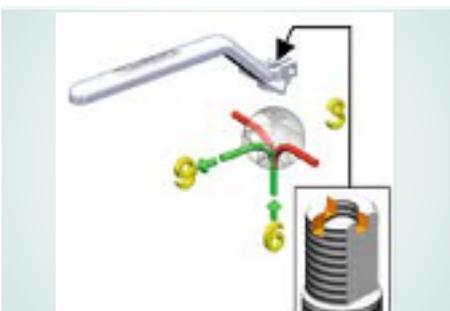

TL-bore, 0 °, 180° turning



TL-bore, 90 °, 180° turning



TL-bore, 90 °, 180° turning

BALL VALVE

3-piece | ORBITAL weld ends | series DG 1 type 8

Advantages

For applications in supply and process systems with ultra-clean media

Reliable stem sealing

High switching frequency

For continuously welded pipeline connections and consistent high weld seam qualities

Safe sealing to the outside

High degree of tightness in the passage



TECHNICAL FEATURES

Ball valve | 3-piece | ORBITAL weld ends | series DG 1 type 8

The ball valve series DG 1 type 8 – with the entire advantages of the basic series – was currently developed for the series of ball valve with ORBITAL weld ends for the ORBITAL welding technology. With this, we are able to provide a perfect solution for supply and process systems for ultra-clean media to the user and to plant engineering. Optionally, it is possible to polish the entire internal passage of the ball valve to $Ra \leq 0.8 \mu m$ in order to meet the high purity requirements of the "high-purity" applications of microelectronics, bioelectronics and pharmacy. The ORBITAL weld ends

are turned cylindrically to the required pipe dimensions both in the inner and in the outer pipe diameter, so that a continuous transition is created between valve and pipeline. The external cylindrical diameter of the weld ends allows to take up the ORBITAL welding device.

Pipe connection dimensions according to the following, among others:
 DIN 11866 – line A (DIN 11850),
 DIN 11866 – line B (EN ISO 1127),
 DIN 11866 – line C (ASME BPE), DIN EN 10220, DIN EN 10305,
 ASME Schedule 5

Available materials

Designation	Material
Body	1.4408 1.4408
Ball	1.4542 (17 -
Stem	4PH) 1.4409
Weld ends	PTFE
Seat rings	PTFE / glass PTFE / carbon UHMWPE PEEK POM PVDF

Options



Option
 Seat rings filling the cavities



Option
 Flushing connections on both sides (SWAGELOK screwing)



Option
 Ball valve passage electropolished

FLANGED BALL VALVE

Type FG

Advantages

Cost-effective automation and safe connection

Low pressure loss

Face-to-face dimension
EN 558 line 27 (DIN 3202-F4)
EN 558 line 1 (DIN 3202F1)

High quality guarantees high security


Tests and certificates confirm the high quality of the ball valve



TECHNICAL FEATURES

Flanged ball valve | type FG

Two-piece stainless steel ball valve – ideally and cost-effectively prepared for automation according to your requirements

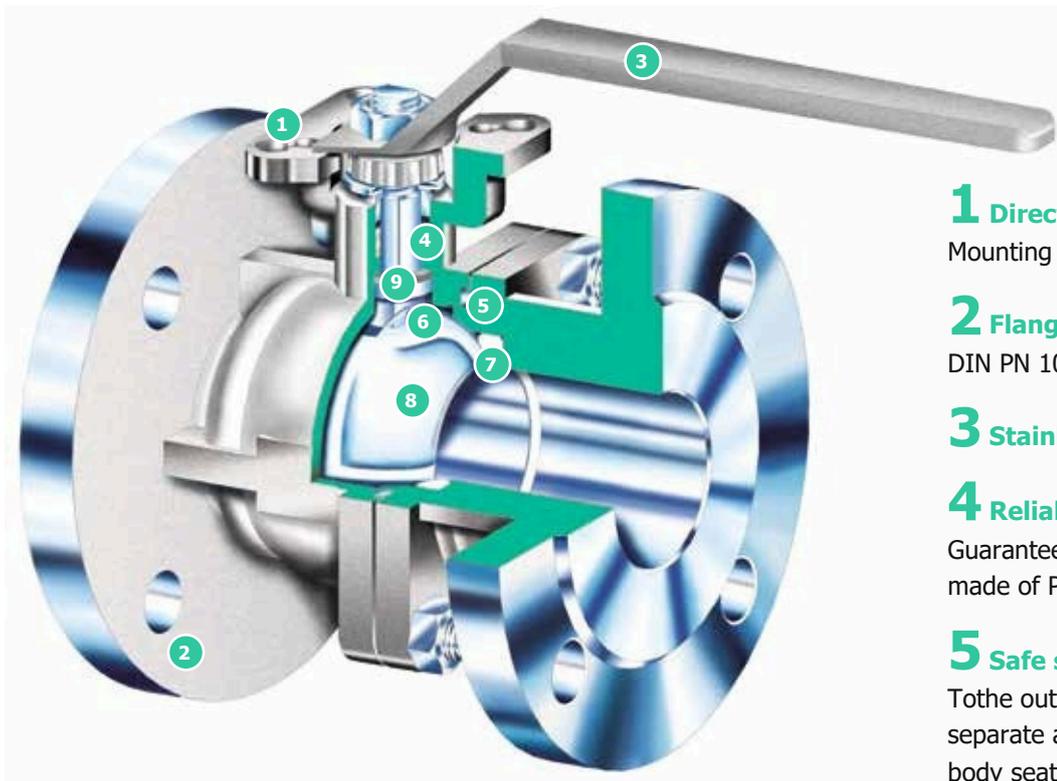

1 Direct mounting

Mounting 4 flange EN ISO 5211

2 Flange connection

DIN PN 10 / PN 40

3 Stainless steel hand lever

4 Reliable stem sealing

Guaranteed by spring-loaded V-rings made of P T FE.

5 Safe sealing

To the outside guaranteed by the separate and fully encapsulated body seat.

6 Antistatic design

Standard feature.

7 Seat rings

Materials: PTFE/glass, PTFE/carbon, PTFE, PEEK, UHMWPE, POM, PVDF.

8 Super-polished ball

Extremely precise contour (roundness).

9 Anti-blowout stem

Inserted from the inside.

THE TYPES

Flanged ball valve | type FG



Type FG DN 15 – 100

Flanged ball valve
PN 10 – 40

Technical data

Two-piece ball valve for installation between flanges according to DIN EN 1092, pressure class depending on the nominal size up to PN 40, floating ball, vacuum-tight.

Face-to-face dimension

EN 558 line 27 (DIN 3202-F4)
EN 558 line 1 (DIN 3202F1)

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10, P11, P12
Leakage rate A



Type FG DN 150

Flanged ball valve
PN 16

Technical data

Two-piece ball valve for installation between flanges according to DIN EN 1092, pressure class PN 16, floating ball, vacuum-tight.

Mounting flange

DIN EN ISO 5211



Test

DIN EN 12266 P10, P11, P12
Leakage rate A

TECHNICAL DATA

Flanged ball valve | type FG

Pressure and temperature range diagram

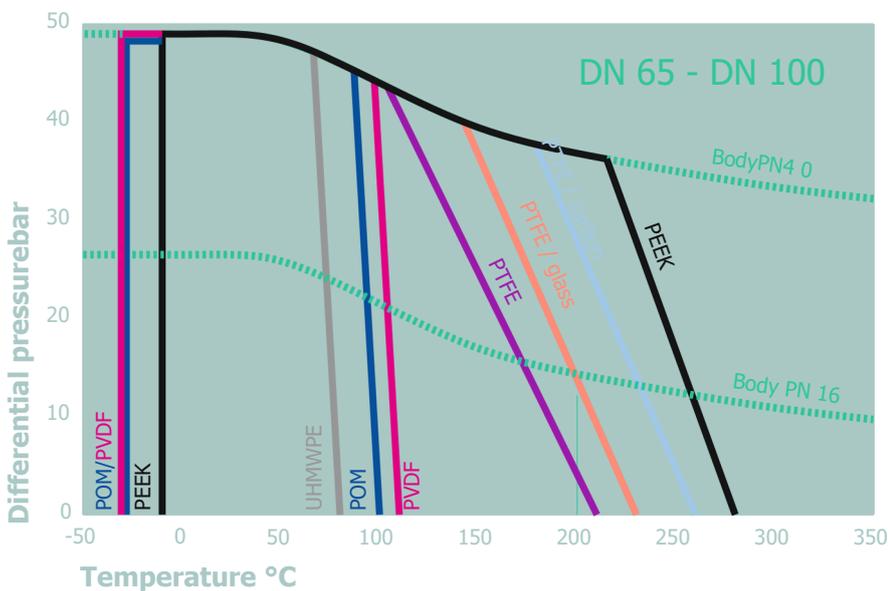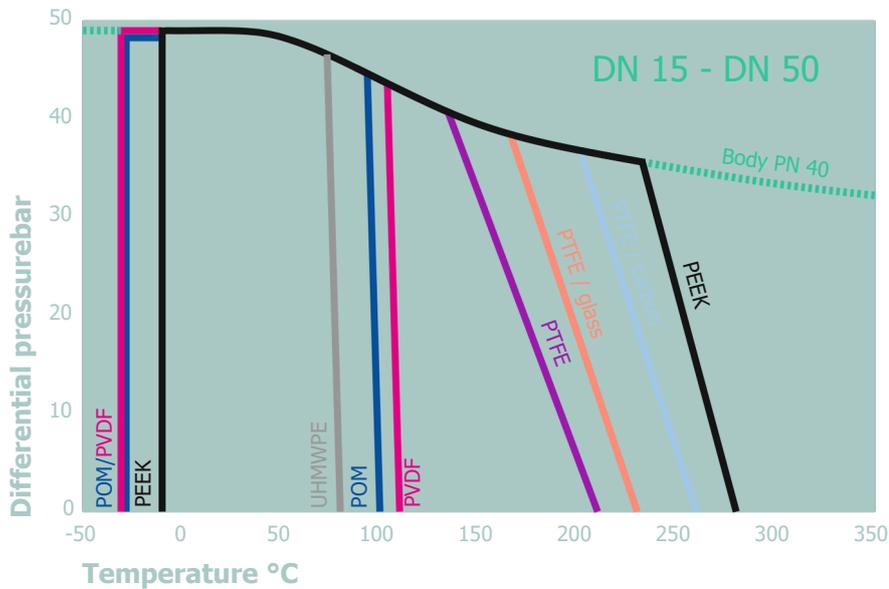

Available materials

Designation	Material
Material DN15-100 (PN10/PN40) FG 6666	
Body	1.4408
Ball	1.4408
Stem	1.4542 (17-4PH)
Body ring	1.4401 / graphite
Seat rings	PTFE PTFE / glass PTFE / carbon PEEK UHMWPE POM PVDF
Material DN15-100 (PN10/PN40) FG 6666 T	
Body	1.4408
Ball	1.4408
Stem	1.4542 (17-4PH)
Body ring	1.4401 / graphite
Seat rings	PTFE
Material DN150 (PN16) FG 6666	
Body	1.4408
Ball	1.4408 / 1.4401
Stem	1.4 4 01
Body ring	1.4401 / graphite
Seat rings	PTFE PTFE / glass

All pressure and temperature specifications are maximum application limits, which are influenced by the interaction of all application factors. Therefore, without technical design and without our confirmation, the specifications are without commitment.

FLANGED BALL VALVE

Stainless steel | PFA-lined | type FGT

Advantages

Reliable chemical resistance due to PFA-lining on the inside – stainless steel on the outside

High diffusion-resistance due to thick-walled lining

Full bore

Minimum contamination due to optimised/reduced cavity


Direct mounting of actuators – safe and efficient – due to interface according to EN ISO 5211



TECHNICAL FEATURES

Flanged ball valve | stainless steel | PFA-lined | type FGT

Two-piece stainless-steel ball valve – ideally and cost-effectively prepared for the automation according to your requirements

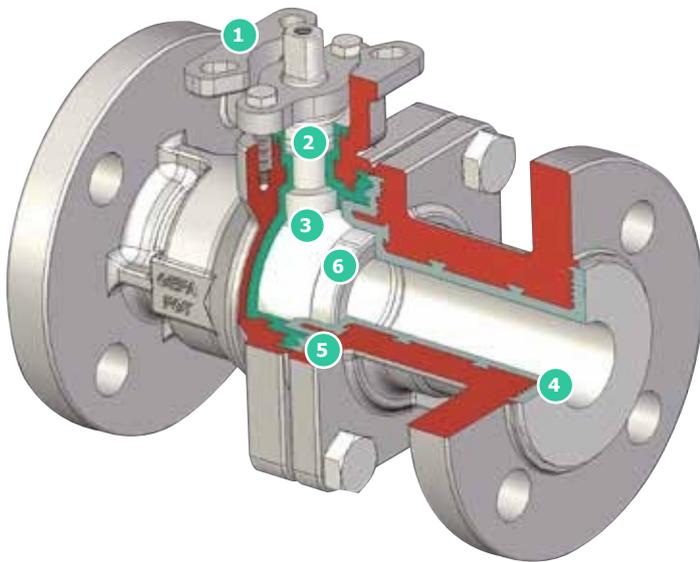

1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Pneumatic, electrical or manual actuation possible

2 Safety

- Low-maintenance due to spring-loaded V-rings made of PTFE
- Anti-blowout stem
- Optional: TA-Luft

3 Stem and ball

Ball and stem are PFA-lined for maximum protection against aggressive media.

4 Lining

Thick-walled designed PFA-lining (3 mm), dimensionally stable, connected with the body and highly diffusion-resistant.

5 Body seal

Safe, labyrinth-shaped sealing of the body halves due to the lining material. No separate body seal necessary.

6 Seat ring

Completely leak-tight in the bore due to the special form of the PTFE seat rings. The preload of the seat rings causes a spring effect, which results in a reliable sealing in all pressure ranges.

THE TYPES

Flanged ball valve | stainless steel | PFA-lined | type FGT



Type FGT

PFA-lined flanged ball valve DN 15 – 100
PN 10 – PN 40 / class 150 with full bore

The material combination stainless steel 1.4408** on the outside and PFA fluoropolymer as lining coming into contact with the medium ensures a very good chemical resistance and the external corrosive influences are also considered. The interface according to EN ISO 5211 allows a cost-effective automation and the direct mounting of actuating elements and actuators.

** From DN 65 body made of steel epoxy coated, stainless steel upon request

Technical data

Lining of body, ball and stem:

PFA

Mounting flange

EN ISO 5211


Face-to-face dimension

EN 558 line 1 (DIN3202-F1)

Flange connection

EN 1092, PN 10 - PN 40

ASME B 16.5 – Class 150

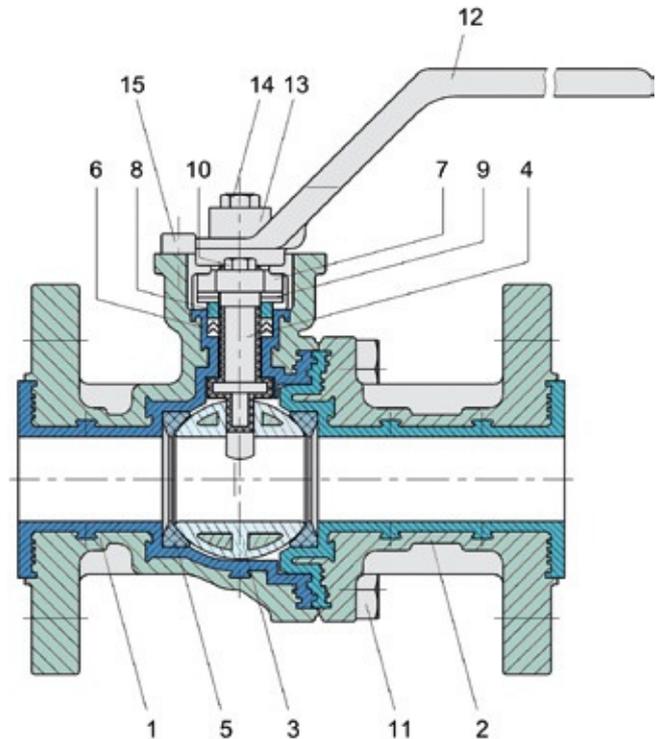

Parts list

Pos.	Designation	Werkstoffe
1 2	Body** Partial	1.4408 / PFA
3 4	body halves Ball	1.4408 / PFA
5*	Stem Seat ring	1.4408 / PFA
6* 7	Packing	1.4313 / PFA
8 9	Gland flange	PTFE
10	Gland Disc spring	PTFE
11	washer Hexagon	1.4308
12	screw Hexagon	1.4301
13	screw Hand lever	1.4310
14	Case Hexagon	Stainless steel A2
15	screw Stop screw	Stainless steel A2
		1.4308
		1.4305
		Stainless steel A2
		Stainless steel A2



* Wear parts (seal kit)

** From DN 65 body made of steel epoxy coated, stainless steel upon request
Other materials available

TECHNICAL DATA

Flanged ballvalve|stainlesssteel|PFA-lined|typeFGT

Pressure and temperature range diagram

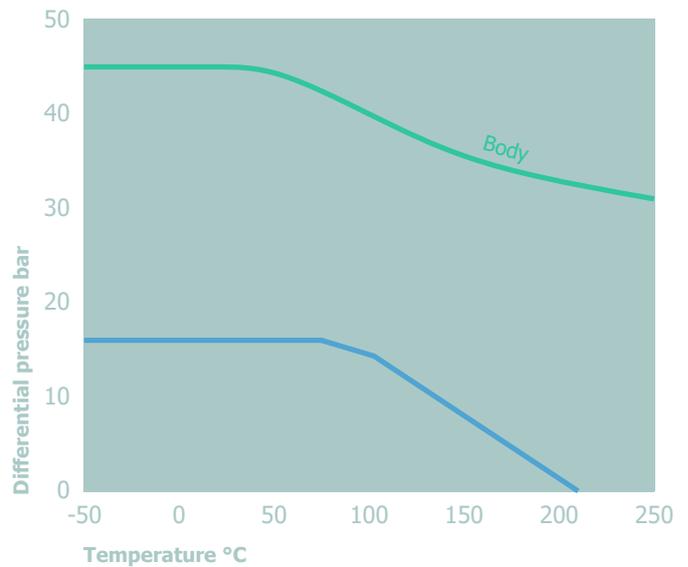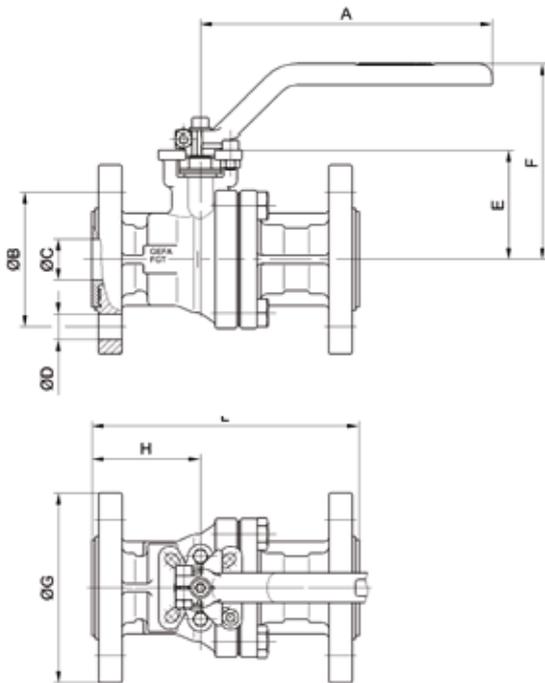

DN	NPS	A	ø B		ø C	ø D		E	F	ø G	H	L	kg
			PN10-40	Class150		PN10-40	Class150						
15	½"	160	65	60,5	17	4 x 14	4 x 15,7	53	102	95	58	130	2,5
20	¾"	160	75	69,9	20	4 x 14	4 x 15,7	56	104	105	65	150	3,3
25	1"	175	85	79,2	25	4 x 14	4 x 15,7	67	120	115	65	160	4,2
32	1 ¼"	175	100	88,9	32	4 x 18	4 x 15,7	72	125	140	75	180	5,7
40	1 ½"	220	110	98,6	40	4 x 18	4 x 15,7	83	140	150	85	200	7,3
50	2"	220	125	120,7	50	4 x 18	4 x 19,1	91	147	165	100	230	10
65	2 ½"	251	145	139,7	65	4 x 18	4 x 19,1	106	164	185	77	290	17,2
80	3"	251	160	152,4	80	8 x 18	4 x 19,1	115	177	200	81	310	20,7
100	4"	315	180	190,5	100	8 x 18	8 x 19,1	130	192	220	92	350	32

All pressure and temperature specifications are maximum application limits, which are influenced by the interaction of all application factors. Therefore, without technical design and without our confirmation, the specifications are without commitment.

KNIFE GATE VALVE

Series Domino

Advantages

Maintenance-free and self-adjusting sealing

No necessity for gland packing

Bidirectional tight shutoff

Smooth-running even after long downtimes

High resistance against water hammer

Locking of the plate in close position

Variety in actuation: hand wheel, hand lever, sprocket, chain wheel, bevel gear, electric actuator, pneumatic and hydraulic cylinder



TECHNICAL FEATURES

Knife gate valve | series Domino

Maintenance-free and self-adjusting
COMPACT cross seal

1 Maintenance-free and self-adjusting

The COMPACT cross seal (double seal lip profile) prevents leakage to the outside caused by the plate. The seal can be readjusted at any time without interrupting the working process.

2 Bidirectional tight shutoff

The valve closes pressure-tightly due to its elastic seat that is chambered and integrated in the body. Its pre-tensioned installation guarantees high leak tightness.

3 Self-cleaning effect

The valve cleans itself by flush-out corners that are part of the body as well as a cutting edge underneath the gate (5). Both features ensure that the sealing is flushed when the valve closes.

4 Total absence of residues

The interplay of the cutting edge of the plate with the one of the lower body allows the media to be cut with neither solids nor fibres to remain in the sealing zone.

5 Segmental arched profile

of the plate prevents solids and fibres from being trapped between the plate and sealing while closing the valve.

6 Metal guide

Due to the design of the valve the plate is guided by the metal guide in the rear body only. Thus the round seal has a sealing function only, without any need to support the guiding of the plate.

7 High resistance to corrosion

due to powder coated bodies and mounting parts.




KNIFE GATE VALVE

Series Domino




The design of the Domino-knife gate valves fulfils the users' highest requirements:

The maintenance-free COMPACT cross seal (double seal lip profile) guarantees tight shutoff and can be adjusted without interrupting the working process.

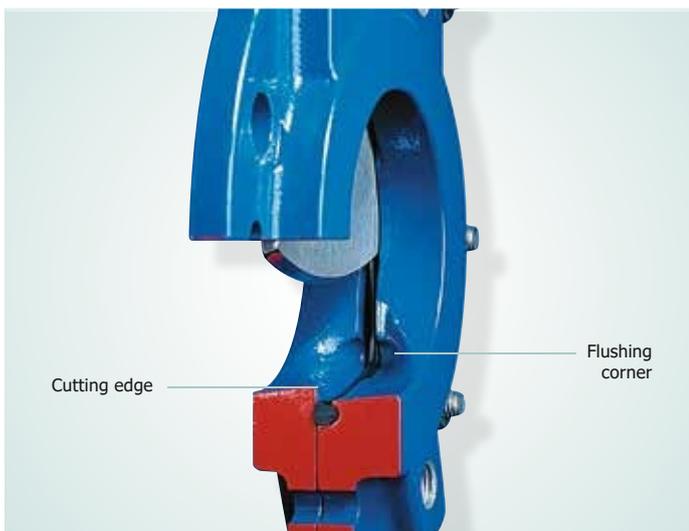

The self-cleaning effect is achieved by flush-out corners in the body and the cutting edge underneath the gate. Solids and fibres are cut by the cutting edge before tightening is done against the elastic seat. The guidance of the gate is interrupted on stroke length, thus dirt can be ejected.

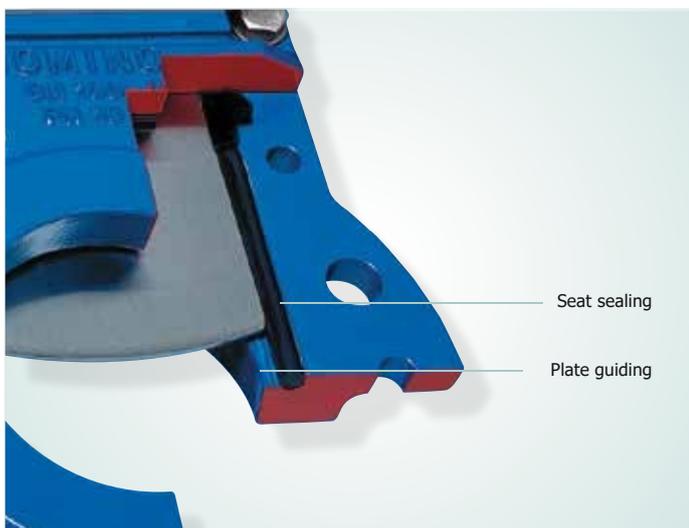


Bidirectional shutoff is achieved by the lateral gate surfaces and the elastic seat which is integrated in the body. The seat is chambered and prestressed mounted. The high finish of the guide- and sealing surface at both sides guarantees long service and tight shutoff. The lateral guidance of the gate prevents the gate from fluttering in either of the flow directions or in throttle positions.

DETAILED SOLUTIONS

Knife gate valve | series Domino


Pre-tensioned and self-adjusting COMPACT cross sealing

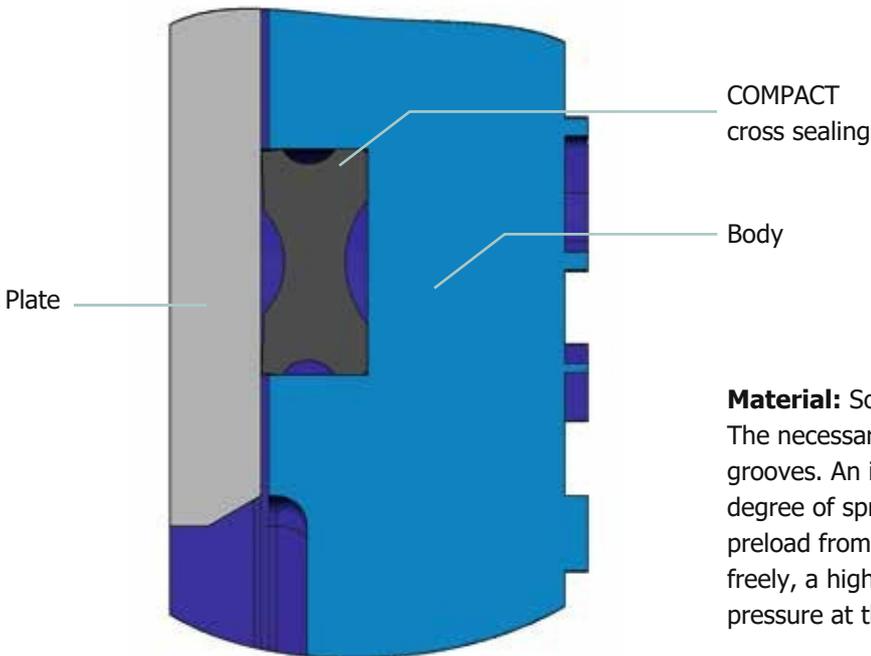

Material: Solid elastomer profile (NBR, EPDM, FPM, MVQ)
The necessary compression is absorbed in the lateral grooves. An inevitable abrasion is compensated by the high degree of spring effect, i.e. there is a natural permanent preload from the sealing itself. As the sealings can be moved freely, a higher internal pressure causes a higher contact pressure at the same time.

Round seal in the gate

lower sealing

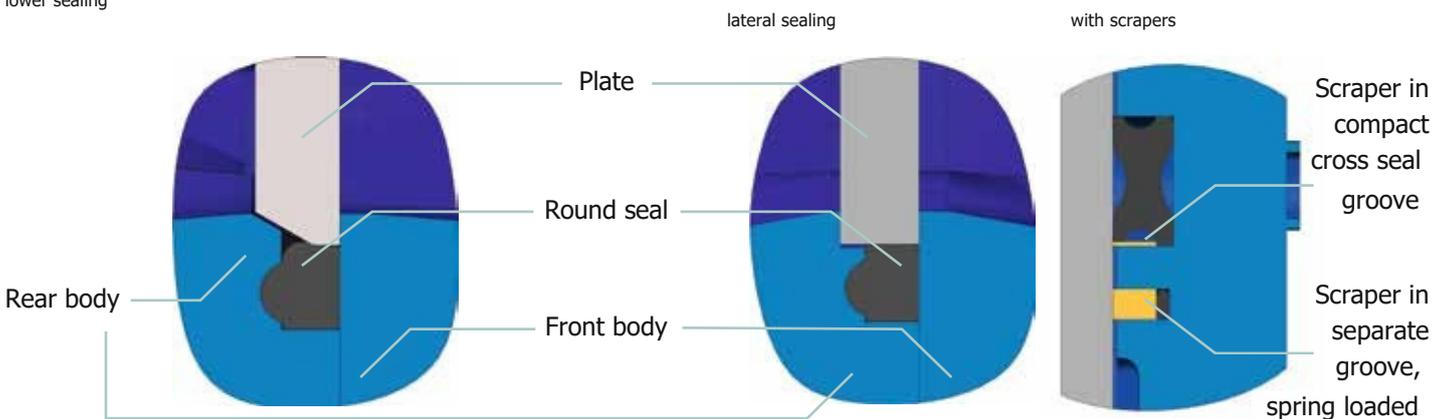

Lower sealing

The arched profile of the plate as well as both cutting edges – the one from the body and the one from the plate – allow a total absence of residues, which are totally flushed away from the round seal when the valve is closed. This way leakage is to be prevented.

Lateral sealing

Due to the design and functionality there is a small contact surface between the sealing and the plate only. Thus only small operating force is needed to move the plate. Furthermore, the resistance against possible pressure shocks and blows is given by metal supports.

THE TYPES

Knife gate valve | series Domino



Type SD 1 – AT 100

DN100– DN 400

Wafer type knife gate valve for installation between flanges, from size DN 250 onwards also available as lug type execution for flanges acc. to EN 1092-1 / PN 10. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal, no necessity for gland packing – maintenance-free. Self-cleaning flush-out corners with cutting edge in the lower body area.

Face-to-face dimension

according to EN 558-1 line 20 (DIN 3202 K1)

Body

GG25, EN GJL-250

Coating

EKB, both inside and outside

Colour

RAL 5010

Plate

Stainless steel 1.4301 or 1.4571

Sealing

NBR (EPDM, FPM, PTFE, ceramic fibre etc.)



Type SD 5 – AT 150

DN50– DN 400

Stainless steel execution

Wafer and lug type knife gate valve for installation between flanges acc. to EN 1092-1 / PN 10. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal, no necessity for gland packing – maintenance-free. Self-cleaning flush-out corners with cutting edge in the lower body area.

Face-to-face dimension

according to EN 558-1 line 20 (DIN 3202 K1)

Body

Stainless steel 1.4408

Plate

Stainless steel 1.4571 hard chrome-plated

Sealing

NBR (EPDM, FPM, PTFE, ceramic fibre etc.)



Type SD 7 – AT 200

DN 50 – DN 1500

Lug type knife gate valve for installation between flanges acc. to EN 1092-1 / PN 10. DN 200-DN 400 also available in PN 16. Also suitable for dead-end service. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal, no necessity for gland packing – maintenance-free. Self-cleaning flush-out corners with cutting edge in the lower body area.

Face-to-face dimension

according to EN 558-1 line 20/16 (DIN 3202 K1/K3)

Body

GG25, EN GJL-250/GGG 40, EN GJS-400-15, stainless steel 1.4408

Coating

EKB, both inside and outside

Colour

RAL 5010

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (EPDM, FPM, PTFE, ceramic fibre etc.)



Type SDR – AT 200 R

DN50 – DN 1200

Control knife gate valve

With optimised control plate designed for precise air volume control with almost linear control function, e.g. for ventilation tasks in sewage installation plants. Lug type knife gate valve for installation between flanges acc. to EN 1092-1 / PN 10. Also suitable for dead-end service. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal, no necessity for gland packing – maintenance-free.

Face-to-face dimension

according to EN 558-1 line 20 (DIN 3202 K1)

Body

GG25, EN GJL-250/GGG 40, EN GJS-400-15

Coating

EKB, both inside and outside

Colour

RAL 5010

Plate

Stainless steel 1.4301, or 1.4571

Sealing

NBR (EPDM, FPM, PTFE)

Subject to technical modifications



Type SD 3 – AT 300

DN 100–DN 300

High pressure execution

Up to 40 bar operating pressure, e.g. for dewatered sewage sludges or biomass. Lug type knife gate valve for installation between flanges acc. to EN 1092-1 / PN 10–PN 40. Also suitable for dead-end service. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal, no necessity for gland packing – maintenance-free. Self-cleaning flush-out corners with cutting edge in the lower body area.

Face-to-face dimension

according to EN 558-1 line 16 (DIN 3202 K3)

Body

GGG 40, EN GJS-400-15

Coating

EKB, both inside and outside

Colour

RAL 5010

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (EPDM, FPM, MVQ)



Type SD 4 / SD 9 – AT 400 / AT 416

DN 40 – DN 1200

With completely round bore – with a special design according to customer requests possible. Lug type knife gate valve for installation between flanges acc. to EN 1092-1 / PN 2,5–PN 40. Special pressure classes, lengths and nominal sizes possible. Also suitable for dead-end service (SD 9). Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal. Optional: secondary sealing, readjustable from the outside. Cutting edge in the lower body area.

Face-to-face dimension

according to e.g. EN 558-1 line 16/25/16 (DIN 3202 K1/K2/K3)

Body

GGG 40, EN GJS-400-15, steel, stainless steel

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (EPDM, FPM, MVQ, etc.)

THE TYPES

Knife gate valve | series Domino



Type SD 75 – AT 750

DN 50– DN 500

Through conduit execution

Lug type knife gate valve for installation between flanges acc. to EN 1092-1/ PN 2.5-PN 160. Also suitable for dead-end service. High pressure and through conduit execution up to PN 160 for dewatered sewage sludges or biomass. Completely round and smooth bore, special lengths and nominal sizes possible. Two-piece body, bidirectional tight shutoff. Metal guided plate embedded protected against pressure shocks. COMPACT cross seal. Optional: secondary sealing, readjustable from the outside.

Face-to-face dimension

according to e.g. EN 558-1 line 16/25/16 (DIN 3202 K1/K2/K3),

Body

Steel, stainless steel V2a or V4A

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (EPDM, FPM, MVQ, etc.)

Type SD 6 – AT 600

Rectangular execution

Lug type knife gate valve for installation between flanges acc. to customer specifications or manufacturer standard. Also suitable for dead-end service. With a special design and different sizes according to customer requests possible. Completely water- and air-tight version for liquids, sludges and granulated solids. Two-piece body, bidirectional tight shutoff. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal to the atmosphere. Optional: secondary sealing, readjustable from the outside. Cutting edge in the lower body area.

Face-to-face dimension

according to customer requests

Body

Steel, stainless steel V2 or V4A

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (EPDM, FPM, MVQ, ceramic fibre, PTFE etc.)

Clear widths

Upon request

Type SD 2 – AT 200 F

DN 200 – DN 1000

Solid material execution

Lug type knife gate valve for installation between flanges acc. to EN 1092-1/ PN 10. Also applicable as wafer type and suitable for dead-end service. ATEX approved for category II 1D/2GD c. For granulated solids, such as carbon dust. Two-piece body with conically designed plate bed milling groove. Lateral plate guidance interrupted alternately in the front and rear body. Bidirectional tight shutoff in both flow directions.

Flange

DIN EN 1092-1 PN 10

Face-to-face dimension

DIN EN 558 line 20

Body

EN-GJL-250 (GG 25), narrowed in the bore

Coating

EKB, both inside and outside

Colour

RAL 9005, electrically conductive

Plate

1.4301 or 1.4571

Scraper

PTFE with MVQ support

Sealing

Ceramic fibre, NBR, EPDM, FPM



Type SD 8 – AT 500/AT 510 F SDH – AT 550F

DN 400 – DN 700

Solid material execution

Lug and wafer type knife gate valve for installation between flanges acc. to EN 1092-1/PN 10. Also suitable for dead-end service in vertical pipelines and below silos. ATEX approved for category II 1/2 D c TX. One-piece body with funnel-shaped outlet for the prevention of product deposits, sealing on one side, flushing connections in the body at the end of the plate stroke allows the closing of the standing product column.

Flange

DIN EN 1092-1 PN 10

Face-to-face dimension

Manufacturer standard

Body

EN-GJS-400-15 (GGG 40)

Coating

EKB, both inside and outside

Colour

RAL 9005, electrically conductive

Plate

1.4301 or 1.4571

Sealing

NBR

Package

PTFE / NBR

Subject to technical modifications

Solid material execution

For pharmaceutical and chemical industries. Lug and wafer type knife gate valve for installation between flanges acc. to EN 1092-1/PN 10. Also suitable for dead-end service in vertical pipelines and below silos. Two-piece body with funnel-shaped outlet for the prevention of product deposits, sealing on one side, flushing connections in the body at the end of the plate stroke allows the closing of the falling or standing product column.

Flange

DIN EN 1092-1 PN 10

Face-to-face dimension

Manufacturer standard

Body

1.4408, completely high-gloss polished on the inside

Plate

1.4401 high-gloss polished

Sealing

MVQ (FDA-conform)

Package

LATTYflon 3206SO with quad ring

MVQ (FDA-conform)

Nominal sizes

Upon request

SD65 – AT 650

Rectangular execution for solid materials

With a special design and different sizes according to user requests possible. Knife gate valve for solid materials applications for installation between flanges. Also suitable for dead-end service in downpipes or below silos. Flanges according to customer specifications or manufacturer standard. Two-piece body, sealing on one side. Metal guided plate, locked when closed. Self-adjusting COMPACT cross seal. Optional: secondary sealing, readjustable from the outside. Cutting edge in the lower body area.

Face-to-face dimension

According to customer request

Body

Steel or stainless steel V2 or V4A

Plate

Stainless steel 1.4301, 1.4571, 1.4462 etc.

Sealing

NBR (ceramic fibre/graphite, PTFE, EPDM, FPM, MVQ, etc.)

Clear widths

Upon request

KNIFE GATE VALVE

Series Domino

The knife gate valve "System DOMINO" is preferably used for sludge and water treatment, substrate applications in biogas plants and process technology. Media containing sludge or fibres are controlled reliably. The knife gate valve seals pressure-tightly in both flow directions! The versatile designs and actuator versions provide our customers and interested parties with a well-developed and sophisticated product range to benefit from.

Available materials depending on the types and maximum operating temperatures

Body		
	Material	Temperature - 10 °C up
22	Grey cast iron EN-GJL-250	to max. 250 °C - 10 °C up
23	Ductile iron EN-GJS-400-15	to max. 350 °C
44	Cast steel GS C25	- 40 °C up to max. 450 °C
45	Steel ST52/ST37	- 40 °C up to max. 450 °C
66	Stainless steel 1.4408	- 50 °C up to max. 500 °C
Further materials such as aluminium, Hastelloy, etc. possible		

Plate		
	Material	Stainless steel
63	1.4301	Stainless steel 1.4571
66	Stainless steel 1.4571	polished
31	Duplex stainless steel 1.4462	
64		
Further materials such as aluminium, Hastelloy, etc. possible		

TECHNICAL FEATURES

Knife gate valve | series Domino

Sealing

EPDM (Ethylene-Propylene-Terpolymer)

Operating temperature: - 20 °C to + 130 °C

FEP coated FPM

Operating temperature: - 26 °C to + 200 °C

NBR (nitrile rubber)

Operating temperature: - 20 °C to + 110 °C

PTFE (Polytetrafluorethylene)

Operating temperature: - 200 °C to + 220 °C

MVQ (silicone rubber)

Operating temperature: - 30°C to + 200°C

Ceramic fibre/graphite

Operating temperature: - 50 °C to + 500 °C

FPM (fluorine elastomer)

Operating temperature: - 10 °C to + 180 °C

Maximum working pressure


SD1 – AT 100 DN 100 –	SD5 – AT 150 DN 50 –	SD7 – AT 200	SDR – AT 200R DN 50
DN 150: 10 bar DN 200 – DN 300: 6 bar DN 350 – DN 400: 4 bar	DN 150: 10 bar DN 200 – DN 300: 6 bar DN 350 – DN 400: 4 bar	DN 50 – DN 80: 16 bar DN 100 – DN 300: 10 bar DN 350 – DN 400: 6 bar DN 450 – DN 800: 4 bar DN 900: 3 bar DN 1000: 2.5 bar from DN 1200: 2 bar Higher operating pressures are possible depending on the medium	– DN 300: 10 bar DN 350 – DN 400: 6 bar DN 450 – DN 800: 4 bar DN 900: 3 bar DN 1000: 2.5 bar DN 1200: 2 bar
SD3 – AT 300	SD4/SD9 – AT 400/AT416	SD75 – AT 750	SD6 – AT 600
DN 100 – DN 250: 40 bar DN 300: 25 bar (for de-watered media)	Standard version up to 16 bar Higher operating pressures are possible depending on the medium	Up to 160 bar (for de-watered media)	Standard version up to 2 bar Higher operating pressures are possible depending on the medium
DN 200 – DN 300: 6 bar	SD8 – AT 500F/AT510F	SD65 – AT 650F	
Standard version max. 1 bar (with solids as medium) Static: DN 200 – DN 300: 10 bar DN 350 – DN 400: 6 bar DN 450 – DN 600: 4 bar DN 700 – DN 900: 3 bar DN 1000 – 2.5 bar	Standard version max. 1 bar (with solids as medium) Static: max. 3 bar	Max. 2 bar depending on the nominal size and the operating conditions (consultation necessary)	

KNIFE GATE VALVES

Actuations

The pneumatic end position damping in closing direction allows a gentle closing of the gate valve plate into the seat sealing of the gate valve in the bottom area (lower sealing in the shut-off).

During the closing process, the exhaust air is shut-off within the last centimetres of the stroke via the air connection by retracting the lower plate of the piston into the damping ring. In this way, a considerable higher counter-pressure is built-up for a short time in the air chamber of the outflowing air, which counteracts the movement. The speed of the cylinder piston is reduced significantly within a short period of time. The residual volume is only released via the throttle passage and thus also the closing speed of the gate valve plate is reduced significantly within a short period of time.

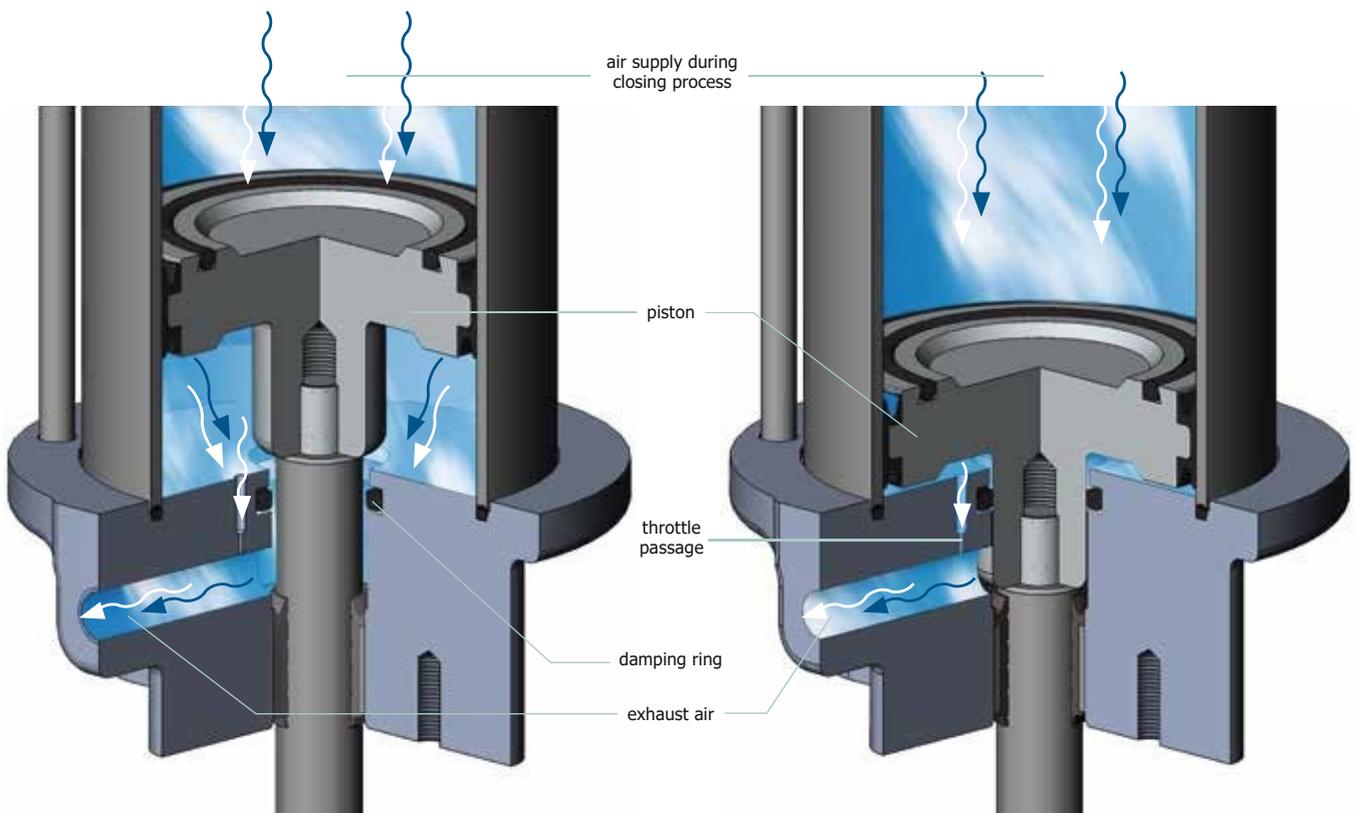

MOUNTING PARTS

Actuations and automation



DOMINO pneumatic cylinder

Piston diameter	Standard strokes	Compressed air connections
80 mm	51 mm, 66 mm, 81 mm	R ¼" R ¼"
100 mm 160 mm	102 mm, 127 mm 152 mm, 202 mm	R ¼"
200 mm 250 mm	202 mm, 252 mm 253 mm, 303 mm	R ¼"
300 mm	352 mm, 402 mm, 452 mm, 502 mm, 602 mm, 702 mm	R ¼" R ½"

Further materials such as aluminium, Hastelloy, etc. possible

DOMINO pneumatic cylinder

Double-acting, air pressure 6-10 bar, cylinder body, cap and bottom made of piston plate made of steel or aluminium,

piston aluminium (optionally stainless steel), made of stainless steel 1.4104, optionally 1.4571.



Hand wheel

Hand-wheel for non-rising stem made of cast iron GGG 40 – JS 1030, diameter 150 mm – 500 mm. Also available with ball handle upon request.



Hydraulic cylinder

Double-acting, for control pressures up to 250 bar. Also available with hydraulic end position indicator and distance measuring system for continuous position feedback.



Electric actuator

For rising stems, applicable for both control or regular operation.



Control of the pneumatic actuators via solenoid valves, 3/2 ways, 5/2 ways, 5/3 ways with blocked intermediate position, quick exhaust and booster valves, ATEX, SIL.

Subject to technical modifications



Indication of the end position OPEN / CLOSE via proximity sensors, wiring in terminal boxes possible, ATEX and ASi-Bus versions upon request.



Indication of the end position OPEN / CLOSE via mechanical proximity switches with roller swivelling lever, open mounting, wiring in terminal boxes possible, optionally also for Exatmospheres.

NON RETURN VALVES

Series RF | short length

Advantages

Sandwich construction for installation between flanges PN 6 – PN 40

Backflow is reliably prevented due to the spring

Low weight

Low noise

Low pressure loss due to optimised opening cross section

Any mounting position possible

High reliability

Long service life



THE TYPES

Non return valve | series RF | short length



RF 6666

Soft seated

DN 15 – DN 100 PN 6 – PN 40
DN 125 – DN 150 PN 10/16

Technical data

Materials

Body	1.4408
Valve plate	1.5471
Spring holder	1.4571
Spring	1.4571
Special materials upon request	

Sealing

EPDM, NBR, FPM, FEP/FPM

Working temperature

- 20 °C to + 250 °C

Face-to-face dimension

DIN EN 558-1 line 49 (DIN 3202/K4)

Test

DIN EN 12266-1 leakage rate A



RF 8686TK

PTFE execution

DN 15 – DN 50 PN 10/PS 10
DN 65 – DN 80 PN 10/PS 6
DN 100 – DN 125 PN 10/PS4

Technical data

Materials

Body	PTFE	carbon
Back-up ring	1.4301	PTFE
Valve plate	carbon	PTFE
Spring holder	carbon	1.4571
Spring	FEP-coated	PTFE
Valve seat	carbon	

Special materials upon request

Working temperature

- 30 °C to + 180 °C

Face-to-face dimension

DIN EN 558-1 line 52 (DIN 3202/K5)