


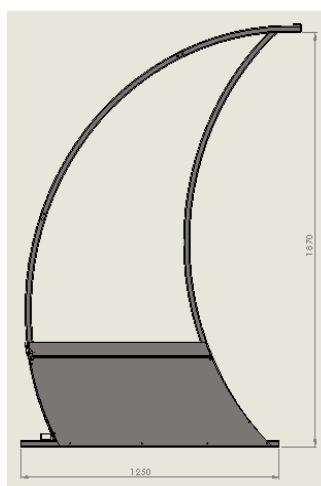

### **Description:**

Designed according to applicable normative, following quality standards and using the latest technology. Aesthetics and functionality have been united on this highly studied concept. Its modular assembly system offers an important advantage at the time of transportation.

Set:

- 50x30x2mm hot-galvanized metallic structure.
- Side closings made of 4mm anti-UV compact polycarbonate.
- Back closing made of 6mm anti-UV cellular polycarbonate.
- Non-slip draining flooring made on galvanized metal plate.
- Kick plates made on galvanized metal plate.
- Polypropylene seats (two seats for each bench meter, except on 1m bench)

### **References:**

|                 |             |         |                 |             |          |
|-----------------|-------------|---------|-----------------|-------------|----------|
| <b>DFT77406</b> | 1 m. length | 1 seat  | <b>DFT77409</b> | 4 m. length | 8 seats  |
| <b>DFT77407</b> | 2 m. length | 4 seats | <b>DFT77410</b> | 5 m. length | 10 seats |
| <b>DFT77408</b> | 3 m. length | 6 seats | <b>DFT77411</b> | 6 m. length | 12 seats |

### **Volume and weight:**

Shipped in boxes of 2,1 x 0,8 x 2,3 m.

1,2,3 m = 4 shelters per box

4,5,6 m = 2 shelters per box

1 m: 157 Kg; 2 m: 165 Kg; 3 m: 253 kg; 4 m: 280 Kg; 5m: 351 Kg; 6m: 390 kg