





QUICK SPACE CONCEPT



UNIQUE HIGH QUALITY SPACES WITH SMALLER LOGISTICS COST

- Quick Space plan for accommodation, offices, workspaces, medical care etc.
- The spaces can be equipped with solar panels, water or sanitary solutions.
- Quick Space Concept can be tailored to the customers needs and requirements.
- Quick Space modules needs 80 % less the storage area and transport costs are lower compared to standard modul-containers.











TRANSPORT











Inside 40`sea container you can transport up to 14 QS containers

ROAD TRANSPORT

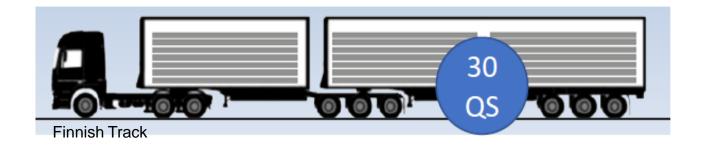














ASSEMBLY



ASSEMBLING BY USING CAR CRANE LIFT, FRONT LOADERS OR MANUAL PALLETT LIFTER

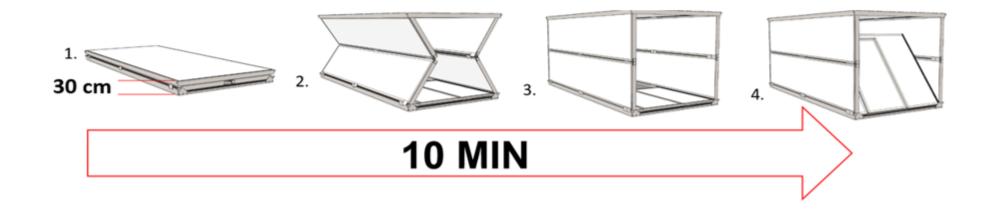

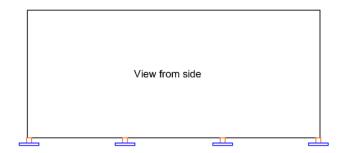





























Intlog Oy Luvalahdentie 449B 27820 Säkylä Finland www.intlog.fi intlog@intlog.fi












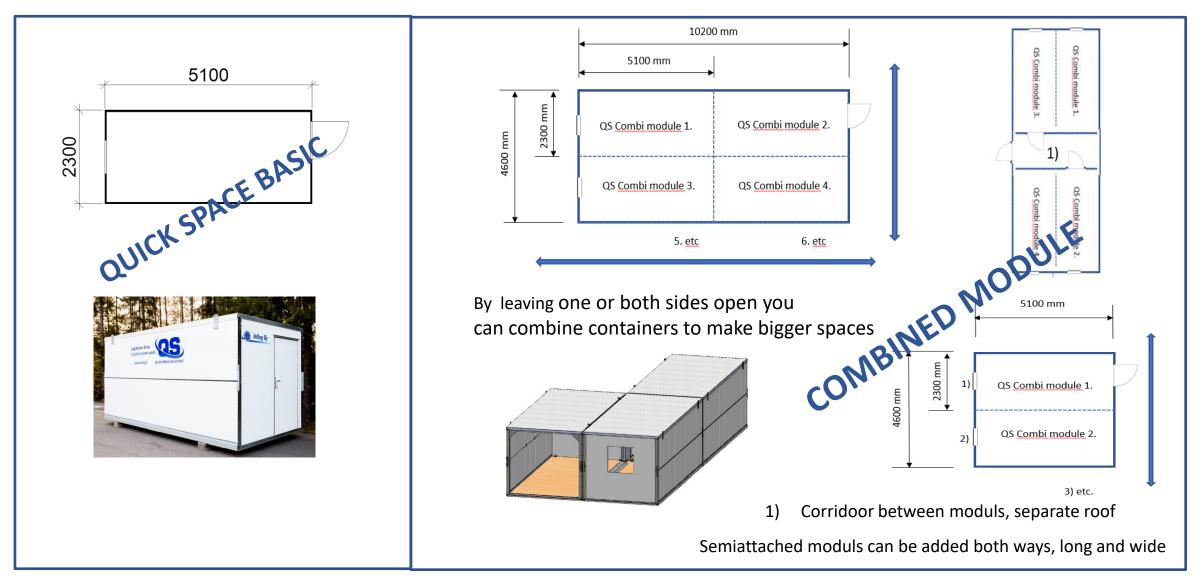









COMBINED MODULE











Meeting Space

IntLog Oy





COVID MODIFICATIONS

5,5 m² 5,5 m² 5100

COVID TEST SPACE









OPTION
















Quick Space - a concept for healthcare, accommodations and office.

For catastrophic areas, when clean facilities for first aid and other installations are urgently needed

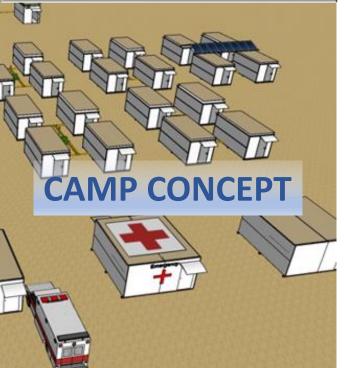








WALKING CORRIDOR



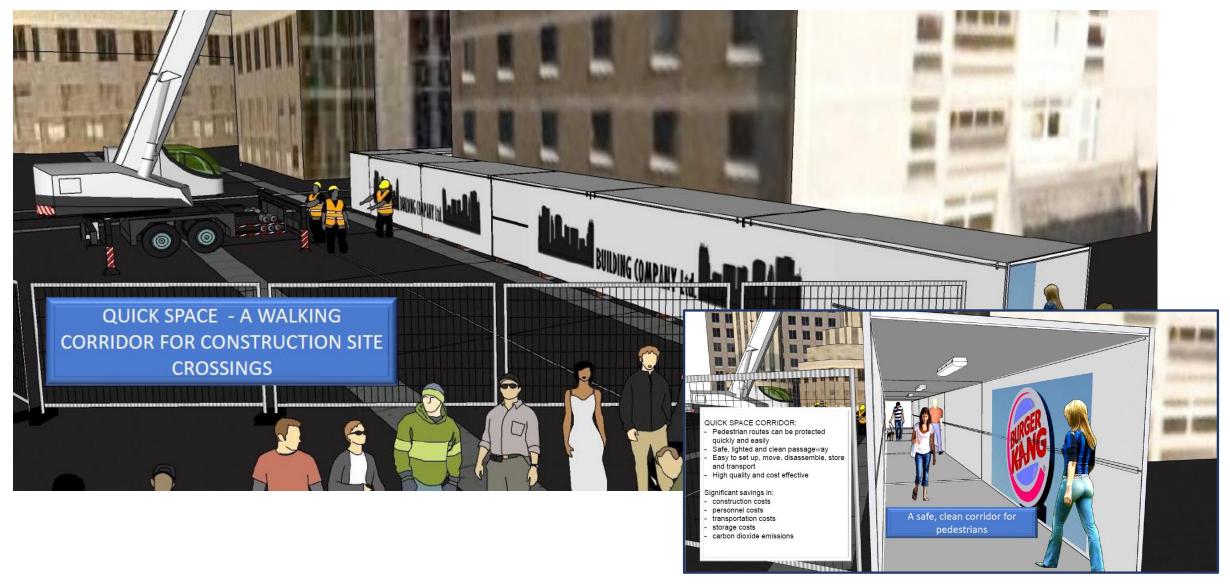





Intlog Oy Luvalahdentie 449B 27820 Säkylä Finland www.intlog.fi intlog@intlog.fi











GREEN SANITARY TOILETS, SHOWERS AND ENERGY PACK

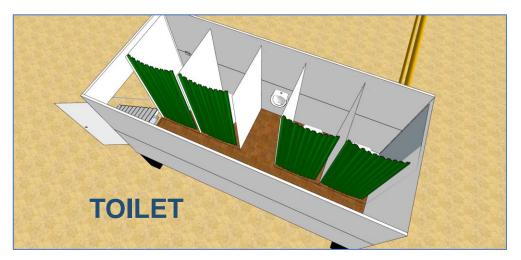

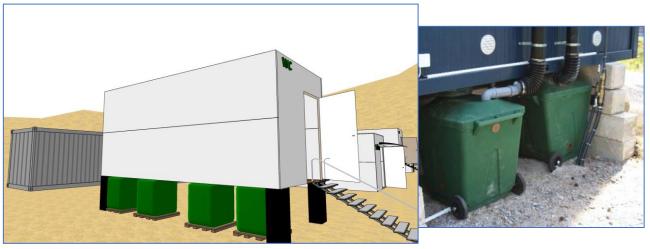











PHOTOCATALYTIC COATING





- Quick Space for
 - Covid testing space, meeting space
 - Toilets
 - Office space
 - Mobile hospitals
 - School rooms
 - Work space
 - Shop space











ANTIBAC



INNOVATIVE NANO SILVER TECHNOLOGY

LAMILUX has developed an innovative composite material for the medical field: this fibre-reinforced plastic has a special nano silver surface which has an antibacterial effect. The effect: Germs die off within a few hours. The innovative material is thus an excellent choice, e.g., for wall coatings in operating theatres and other medical institutions.

The development partner here was the research company "RAS AG" from Regensburg, Germany. The company is regarded as a world leader in nano silver research.

The new, antibacterial material can be used to cover both walls and ceilings. In a research project funded by the ITZB (Innovations- und Technologiezentrum Bayern), a nano silver technology has been developed in collaboration with the "RAS AG" on which - as scientific experiments clearly prove - dangerous germs die within a few hours.

WHY LAMILUX ANTIBAC?

Multi-resistant bacteria pose an increasingly serious threat in hospitals, and can become a deadly risk for patients. Hospitals are therefore facing the permanent challenge of mitigating or even preventing the occurrence of hazardous hospital germs through targeted preventive and acute measures.

For example, the dreaded MRSA (methicillin-resistant staphylococcus aureus) has repeatedly occurred in OP in areas. It can cause wound infection and inflammation of the respiratory tract, in humans in particular, and is resistant to certain antibiotics. Medical experts estimate that in Germany alone 15,000 patients are killed by hospital

MORE APPLICATIONS IN THE FOOD SECTOR

In addition to use in hospitals, there are numerous fields of application for the high-tech material in the food industry.

More specifically where high standards of hygiene must be complied with, and sterility is of the utmost importance; for example, in cold stores, refrigerated cells and transports, as well as in processing rooms and abattoirs.

MAXIMUM HYGIENE THANKS TO STERILE SURFACES

Besides the benign and useful bacteria that inhabit our bodies in their billions, there are also many unwanted germs that we encounter in nearly all walks of life. Whether in the food industry or in medicine - contact with these pathogens typically has unpleasant and sometimes even fatal consequences.

Above all, multi-resistant germs, against which antibiotics are powerless, cause major health and financial damage around the world every day.

In a three-year research project, LAMILUX has collaborated with scientists and health professionals to develop a highly effective and durable material that can improve global hygiene standards in many walks of life. Whether as a wall and ceiling coating in hospitals and operating theatres, a lightweight material in food transportation, or for hygienic wall panels in food processing, the integrated nano silver at LAMILUX AntiBac neutralises more than 99.9% of all bacteria on its surface.





LAMILUX ANTIBAC MAXIMUM HYGIENE THANKS TO STERILE SURFACES

MEDICAL

In Germany alone, some 15,000 people die each year from "healthcare-associated infections" - despite high hygienic standards. The threat here stems from multidrug-resistant pathogens which have developed resilience to most antibiotics.



NANO SILVER ENCAPSULATED IN AN INNOVATIVE PROTECTIVE COVER

- · Maximum effectiveness against all bacteria
- · Maximum durability even under the toughest conditions
- Health safety and environmental compatibility guaranteed











AIR CONDITIONER





The perfect choice for modular space

Windy is a product that combines innovative compact design, exceptional performance and quiet operation. It is the first and only air conditioner without an outside split and with a single coaxial tube for the air exchange.

Advantages vs split type air conditioner:

- no external unit
- no vandalism
- no broken refrigerant lines
- free placement on any wall
- easily removable e.g. during transport or transfer to another application
- both wall and floor installation can be made
- no refrigerant installation, no plumbing, no electrical work

Easy installation, no refrigerant license needed

Windy air conditioner is installed by making a hole to outer wall and screwing a mounting plate to inner wall, which holds the machine in its place. After mounting of coaxial tube and electrical plug, Windy is ready for operation. The condensation leaves with the exhaust air and it is ensured by the internal condensation tank.

Thanks to the special multi-layer insulation of all the components and to the double compressor isolation, Windy is suitable to be installed in all environments.

The installation of Windy requires no refrigerant license and is electrified by plugging the plug into a wall socket

Technical data:

Cooling capacity: 73-78 m3

Cooling power: 2,44 kW

Voltage: 220-240 V
Frequency: 50 Hz

• Input power: 890 W

Noise level: 37-47 dBA

Dimensions: 540 x 630 x 290 mm

Weight: 32 kg

Refrigerant gas: R410 A

EER (cooling): 2,73

Energy efficiency class: A

Made in Italy

Guarantee: 2 years

Easy to use

The touch panel on the unit makes it easy to operate Windy. The LEDs clearly indicate the status of the unit. In addition to cooling, the unit also has programs for dehumidification and ventilation

.










SOLAR ENERGY PANELS





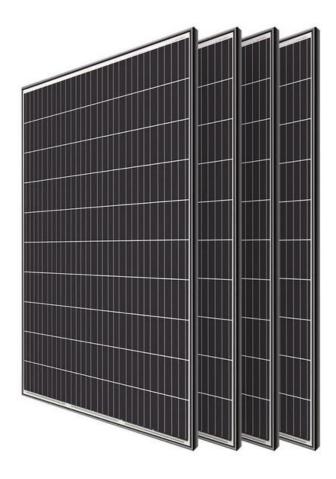












SUN PROTECTION

Efficient container shading with TECHNICAL REFLECTIVE SHADE SCREEN

SOLARO -continuously developed innovative shading and energy saving solutions. also at the forefront of development and innovation of technical sun protection solutions for facilities such as tents, prefabricated houses and containers. SOLARO compared to dark shadenets;

- Refl ects solar radiation
- The open structure of the screen improves airfl ow and ventilation
- Lower daytime temperatures inside the facility
- Nighttime the temperatures can be maintained for longer inside the facility

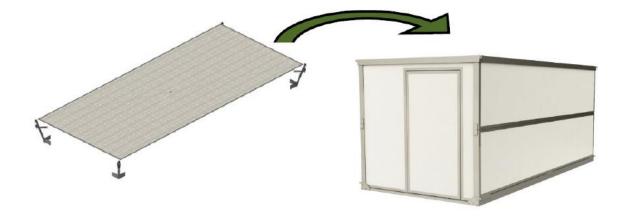

Allow more light in and reduce temperatures


	W *	[**]
	SOLARO 6125	Dark shade nets
Solar	100%	100%
Reflected	54%	9%
VIS transmitted	39%	25%
IR/thermal absorbed	7%	66%
Re-radiation in	-6%	-33%
Re-radiation out	-1%	-33%
Light in	39%	25%
Energy in	39+6 = 45%	25+33 = 58%

Six degree temperature reduction with SOLARO

In Kenya the temperature inside two containers is measured and compared throughout a four day period. One container is shaded while the other one is not.

The sun is positioned in a vertical upright position, overtop the containers, for the majority of the day. The temperatures were measured every ten minutes.

The highest measured temperature inside the SOLARO shaded container was six degrees lower than the reference container without shade.











DRYING TECHNOLOGY



CTR STD-TT is our smallest adsorption dehumidifier for fixed installation in crawl spaces, with a dry air volume of 200 m3/h.

Crawl space dehumidifier CTR STD-TT is specially designed for foundations with only damp problems. It has the market's lowest energy consumption and is therefore superbly energy efficient. CTR STD-TT is specially designed for use in crawl spaces, where the requirements are for robustness, operational safety and long service life.

SOME ADVANTAGES

- ► Can be controlled and monitored with HomeVision®
- Designed for foundations up to 180 m³
- ▶ High quality and long service life
- Extremely energy efficient and has low operating costs





Dry air volume 230 m3/h Wet air volume 35 m3/h Power supply 230 V, 50 Hz Power consumption 860 W Real consumption 775 W Wet air outlet Ø 80 mm Dry air outlet Ø 100 mm 56 dB Noise level (3m) Weight 15 kg Dimensions (L x B x H) 455 x 326 x 285mm Overheating protection x3 80°C + 90°C + 130°C Dehumidification capacity at: 20°C, 60% RH 14 I/day Dehumidification capacity at: 10°C, 60% RH 13 l/day Dehumidification capacity at: 5°C, 60% RH 11 I/day Article number 02700

TECHNICAL DATA









CORROVENTA









DECONTAMINATION





Cleamix - Finnish Disinfection Technology Innovation.

The system challenges the solutions on the market with versatile features and portability. Cleamix equipment allows comprehensive disinfection of facilities, vehicles, equipment and even aircraft. Cleamix automatically treats disinfection and tells its user about the condition or equipment being clean.

The process is based on hydrogen peroxide vaporization. Cleamix has proven to eliminate viruses, bacteria, toxins and chemical warfare weapons.













