




tecnimoem
Research+Development+Innovation



DETAILS



MAXIMUM USER WEIGHT: 135 kg



MINIMUM SIZE: 90 x 190 cm



VERTICAL ELEVATION: 39 to 77 cm




SUITABLE FOR HOIST USE



**4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

90 cm

90 x 196

90 x 206

105 cm

105 x 196

105 x 206

On request Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot
- » Different mattress base options available

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric linear motor operation: 4,000 + 4,000 N, 7,000 N
- » 39 to 77 cm vertical elevation.
- » Trendelenburg and reverse trendelenburg to 15°.
- » A single lockable wired handset for all movements.
- » Max. user weight: 135 kg with wood slats.
- » Electro-welded wire mesh or phenolic board: 180 kg.
- » Attachments for lift and drip poles.
- » Two 125-mm Ø steerable wheels on the headend. With central brake on the footend.
- » Epoxy-polyester covered steelstructure.
- » Suitable for hoist use: 160 mm.
- » Different mattress base options available.
- » Standard width: 90 cm.
- » Standard length: 196 cm for 190 cm mattress.

ANETO [Electric Bed with Vertical Elevation]



DETAILS



MAXIMUM USER WEIGHT: **180 kg**



MINIMUM SIZE: **90 x 180cm**



VERTICAL ELEVATION: **35 to 75 cm**



SUITABLE FOR **HOIST USE**





4 SECTION
3 ARTICULATIONS



WITHOUT
NECESSITY OF TOOLS

POSITIONS



MEASURES (cm)

Mattress 90 cm **External 105 cm**

90 x 180

105 x 204

90 x 190

105 x 214

90 x 200

105 x 224

On request

OPTIONS *(See accessories)*

- » Zip on the foot
- » Different bed rail options available
- » Different mattress base options available







CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric motor operation:
4000 + 4000 N
Linear motors: 3000 N
- » Vertical elevation: 35 to 75 cm.
- » Trendelemburg and reverse trendelemburg to 11°.
- » A single wired handset for all functions.
- » Maximum user weight: 180 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Mattress dimensions: 90 x 190 cm.


TEIDE [Electric Bed with Vertical Elevation]



DETAILS

-  **MAXIMUM USER WEIGHT: 180 kg**
-  **MINIMUM SIZE: 90 x 180 cm**
-  **VERTICAL ELEVATION: 35 to 75 cm**
-  **SUITABLE FOR HOIST USE**
-  **4 SECTION
3 ARTICULATIONS**
-  **WITHOUT
NECESSITY OF TOOLS**

POSITIONS

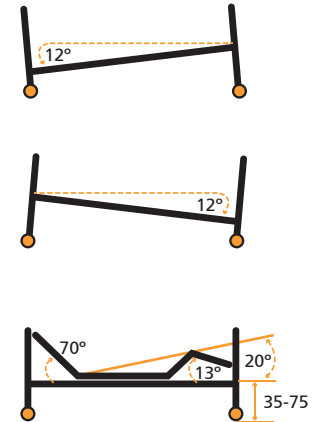

MEASURES (cm)

Mattress:		External:	
90 cm	90 x 180	105 cm	105 x 204
	90 x 190		105 x 214
	90 x 200		105 x 224
105 cm	105 x 180	120 cm	120 x 204
	105 x 190		120 x 214
	105 x 200		120 x 224

 On request (90x210 only mesh base)

OPTIONS (See accessories)

- » Zip on the foot
- » Different bed rail options available
- » Different mattress base options available (for 90 x 120, only mesh base)

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric motor operation: 4000 + 4000 N
Linear motors: 3000 N
- » Vertical elevation: 35 to 75 cm.
- » Trendelemburg and reverse trendelemburg to 12°.
- » A single wired handset for all functions.
- » Maximum user weight: 180 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 100-mm Ø wheels with independent brake.
- » Mattress dimensions: 90 x 190 cm.
- » Suitable for hoist use.
- » Support for lifting and drop pole.

ANETO LOW [Electric Bed with Vertical Elevation]



DETAILS



MAXIMUM USER WEIGHT: 180 kg



MINIMUM SIZE: 90 x 190 cm



VERTICAL ELEVATION: 21 to 61 cm



SUITABLE FOR HOIST USE



4 SECTION 3 ARTICULATIONS



WITHOUT NECESSITY OF TOOLS

OPTIONS (See accessories)

- » Wood bed rails fitted to headboard
- » Fixed leg: 17 to 57 cm
- » Zip on the foot

MEASURES (cm)

Steel bed rails

Wood bed rails

Mattress 90cm

External 120cm

Mattress 90cm

External 105cm

90 x 190

102 x 214

90 x 190

105 x 214

On request

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric motor operation:
4000 + 4000 N
Linear motors: 3000 N
- » Vertical elevation: 21 to 61 cm.
- » Trendelemburg and reverse trendelemburg to 12°.
- » A single wired handset for all functions.
- » Maximum user weight: 180 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 50-mm Ø wheels with independent brake.
- » Mattress dimensions: 90 x 190 cm.
- » Suitable for hoist use.
- » Support for lifting and drop pole.

TEIDE LOW [Electric Bed with Vertical Elevation]



DETAILS



MAXIMUM USER WEIGHT: 180 kg



MINIMUM SIZE: 90 x 190 cm



VERTICAL ELEVATION: 21 to 61 cm



SUITABLE FOR HOIST USE



4 SECTION 3 ARTICULATIONS



WITHOUT NECESSITY OF TOOLS

OPTIONS *(See accessories)*

- » Wood bed rails fitted to headboard
- » Fixed leg: 17 to 57 cm
- » Zip on the foot

MEASURES (cm)

Steel bed rails

Mattress

90 cm

90 x 190

105 cm

105 x 190

External

102 cm

102 x 214

117 cm

117 x 214

Wood bed rails

Mattress

90 cm

90 x 190

105 cm

105 x 190

External

105 cm

105 x 214

120 cm

120 x 214

On request







CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric motor operation: 4000 + 4000 N
Linear motors: 3000 N
- » Vertical elevation: 21 to 61 cm.
- » Trendelemburg and reverse trendelemburg to 12°.
- » A single wired handset for all functions.
- » Maximum user weight: 180 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 50-mm Ø wheels with independent brake.
- » Mattress dimensions: 90 x 190 cm.
- » Suitable for hoist use
- » Support for lifting and drop pole

OVAL [Folding Bed with Vertical Elevation]



DETAILS

-  MAXIMUM USER WEIGHT: 180 kg
-  MINIMUM SIZE: 90 x 190 cm
-  TWO HEIGHT: 37 to 77 cm 23 to 63 cm
-  SUITABLE FOR HOIST USE
-  4 SECTION
3 ARTICULATIONS
-  WITHOUT
NECESSITY OF TOOLS

MEASURES (cm)

Mattress 90 cm:
90 x 190

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Three electric motor operation:
4000 + 4000 N
Linear motors: 3000 N
- » Two heights: 37 to 77 and 23 to 63 cm
- » Trendelemburg and reverse trendelemburg to 12°.
- » A single wired handset for all functions.
- » Maximum user weight: 180 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 100-mm Ø wheels with independent brake.
- » Mattress dimensions: 90 x 190 cm.
- » Suitable for hoist use
- » Support for lifting and drop pole


LEZA PLUS [Electric Bed with Elevation System]



DETAILS

- MAXIMUM USER WEIGHT: 150 kg**
- MINIMUM SIZE: 80 x 196 cm**
- VERTICAL ELEVATION: 38 to 80 cm**
- SUITABLE FOR HOIST USE**
- 4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

80 cm	90 cm	105 cm
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot

CHARACTERISTICS

- » Bed with four sections and three articulations.
Slat holders: thermo injected rubber flexible plugs.
- » Two electric motor operation:
4,000 + 4,000 N
Linear motor: 6,000 N
- » Vertical elevation: 38 to 80 cm
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 cm.


VIANA PLUS [Electric Bed with Elevation System]



DETAILS

- MAXIMUM USER WEIGHT: 150 kg**
- MINIMUM SIZE: 80 x 186 cm**
- VERTICAL ELEVATION: 38 to 80 cm**
- SUITABLE FOR HOIST USE**
- 4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

80 cm	90 cm	105 cm
80 x 186	90 x 186	105 x 186
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Slat holders: thermo injected rubber flexible plugs.
- » 38 x 8 and 100 x 8 mm vaporised shaped beech slats.
- » Two electric motor operation:
4,000 + 4,000 N
Linear motor: 6,000 N
- » Vertical elevation: 38 to 80 cm
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 cm.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

RECOM PLUS [Electric Bed with Elevation System]



DETAILS



MAXIMUM USER WEIGHT: 150 kg



MINIMUM SIZE: 80 x 186 cm



VERTICAL ELEVATION: 38 to 80 cm




SUITABLE FOR HOIST USE



**4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

80 cm	90 cm	105 cm
80 x 186	90 x 186	105 x 186
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request Stock

OPTIONS (See accessories)

- » Headboard and footboard
- » Bed rail
- » Zip on the foot

CHARACTERISTICS

- » Bed with four sections and three articulations. Fixed thermo-injected polyethylene slats plugs.
- » 53 x 8 vaporised beech slats with adjustable lower back section.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Two electric motor operation: 4,000 + 4,000 N
Linear motor: 6,000 N
- » vertical elevation: 38 to 80 cm
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 cm.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

NULES PLUS [Electric Bed with Elevation System]



DETAILS



MAXIMUM USER WEIGHT: 135 kg



MINIMUM SIZE: 90 x 196 cm



VERTICAL ELEVATION: 38 to 80 cm




SUITABLE FOR HOIST USE



**4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

90 cm

90 x 196

Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot

CHARACTERISTICS

- » Bed with four sections and three articulations. Fixed thermo injected polyethylene slats plugs.
- » 53 x 8 mm vaporised beech slats with adjustable lower back section.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 135 kg.
- » Two electric motor operation: 4,000 + 4,000 N
Linear motor: 6,000 N
- » vertical elevation: 38 to 80 cm
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 cm.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

LEZA [Electric Articulated Bed]



DETAILS



MAXIMUM USER WEIGHT: 150 kg




MINIMUM SIZE: 80 x 196 cm



**4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

80 cm	90 cm	105 cm
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Slat holders: thermo injected rubber flexible plugs.
- » Two electric motor operation: 4,000 + 4,000 N.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Suitable for hoist use.
- » Round corner

VIANA [Electric Articulated Bed]



DETAILS



MAXIMUM USER WEIGHT: 150 kg




MINIMUM SIZE: 80 x 186 cm



**4 SECTION
3 ARTICULATIONS**

POSITIONS

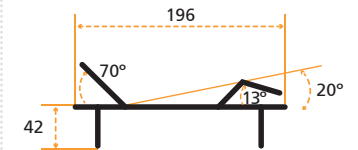

MEASURES (cm)

80 cm	90 cm	105 cm
80 x 186	90 x 186	105 x 186
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Slat holders: thermo-injected rubber flexible plugs.
- » 38 x 8 and 100 x 8 mm vaporised shaped beech slats.
- » Electric motor operation: 4.000 +4.000 N.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.



DETAILS



MAXIMUM USER WEIGHT: **150 kg**




MINIMUM SIZE: **80 x 186 cm**



4 SECTION
3 ARTICULATIONS

POSITIONS



MEASURES (cm)

80 cm	90 cm	105 cm
80 x 186	90 x 186	105 x 186
80 x 196	90 x 196	105 x 196
80 x 206	90 x 206	105 x 206

On request Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations. Fixed thermo-injected polyethylene slats plugs.
- » 53 x 8 vaporised beech slats with adjustable lower back section.
- » Electric motor operation: 4.000 + 4.000 N.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

NULES [Electric Articulated Bed]



DETAILS



MAXIMUM USER
WEIGHT: **135 kg**




MINIMUM SIZE:
90 x 196 cm



**4 SECTION
3 ARTICULATIONS**

POSITIONS

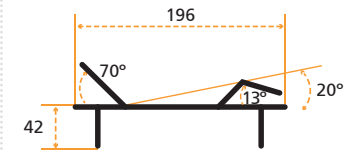

MEASURES (cm)

90 cm

90 x 196

Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Fixed thermo-injected polyethyfen slats plugs.
- » 53 x 8 vaporised beech slats with adjustable lower back section.
- » Electric motor operation: 4.000 + 4.000 N.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 135 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Standard widths: 90 and 105 cm.
- » Standard bed length: 196 cm for 190 cm mattress.



DETAILS



MAXIMUM USER
WEIGHT: **135 kg**




MINIMUM SIZE:
90 x 196 cm



4 SECTION
3 ARTICULATIONS

POSITIONS

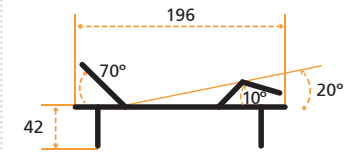

MEASURES (cm)

90 cm

90 x 196

Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
- » Zip on the foot: NO
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Slat holders: thermo injected rubber flexible plugs.
- » Two electric motor operation: 4,000 + 4,000 N.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 135 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Suitable for hoist use.
- » Round corner

LEIVA [Manual Articulated Bed]



DETAILS



MAXIMUM USER
WEIGHT: **135 kg**




MINIMUM SIZE:
90 x 196 cm



4 SECTION
3 ARTICULATIONS

POSITIONS



MEASURES (cm)

90 cm

105 cm

90 x 196

105 x 196

On request

Stock

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
(not available Irati model)
- » Different legs options suitable

CHARACTERISTICS

- » Bed with four sections and three articulations.
Fixed thermo-injected polyethylene slats plugs.
- » 53 x 8 mm vaporised beech slats with adjustable lower back section.
- » Manually operated with retractable levers.
- » Maximum user weight: 135 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Standard width: 90 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

ORIA [Manual Articulated Bed with Zip]



DETAILS



MAXIMUM USER
WEIGHT: **135 kg**




MINIMUM SIZE:
80 x 196 cm



3 SECTION
2 ARTICULATIONS

POSITIONS



MEASURES (cm)

80 cm

90 cm

105 cm

80 x 196

90 x 196

105 x 196

On request

OPTIONS *(See accessories)*

- » Headboard and footboard
- » Bed rail
(not available Irati model)
- » Different legs options suitable

CHARACTERISTICS

- » Bed with three sections and two articulations.
Slat holders: thermo injected rubber flexible plugs.
- » 38 x 8 mm vaporised beech slats with adjustable lower back section.
- » Manually operated with retractable levers.
- » Maximum user weight: 135 kg.
- » Epoxy-polyester covered steel structure.
- » Attachments for lift and drip poles.
- » Widths: 80 - 90 - 105cm.
- » Standard bed length: 196 cm far 190 cm mattress.

BARIÁTRICA [Electric Articulated Bed]



DETAILS



MAXIMUM USER WEIGHT: 350 kg



MINIMUM SIZE: 120 x 206 cm



VERTICAL ELEVATION: 38 to 76 cm




SUITABLE FOR HOIST USE



**4 SECTION
3 ARTICULATIONS**

POSITIONS



MEASURES (cm)

120 cm

120 x 206 For mattress 120 x 200

Stock

OPTIONS (See accessories)

» Bed rail with three bars

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Electro-welded bed mesh.
- » Five electric motors operation: 3,000 and 6,000 N.
- » Vertical elevation: 38-76 cm.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 350 kg.
- » Epoxy-polyester covered steel structure.
- » Melamine coated 19 mm MD wood head and footboards.
- » Attachments for lift and drip pales.
- » 25 x 1,5 mm, 3 bars, retractable side rails.
- » Six 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 mm.

MARINA [Bed with Elevation System]



DETAILS



MAXIMUM USER WEIGHT: **150 kg**



MINIMUM SIZE: **90 x 190 cm**



VERTICAL ELEVATION: **38 to 80 cm**




SUITABLE FOR HOIST USE



4 SECTION
3 ARTICULATIONS

POSITIONS



MEASURES (cm)

90 cm

90 x 196

90 x 206

On request

OPTIONS *(See accessories)*

- » Bed rail with four bars
- » Zip on the foot

CHARACTERISTICS

- » Bed with four sections and three articulations.
- » Detachable polypropylene copolymer bed sheets.
- » Two electric motor operation:
 - 4,000 + 4,000 N
 - Linear motor, 6,000 N
- » Vertical elevation: 38 to 80 cm.
- » A single lockable wired handset for all movements.
- » Maximum user weight: 150 kg.
- » Epoxy-polyester covered steel structure.
- » ABS head and footboards.
- » Attachments for lift and drip poles.
- » Four 125-mm Ø wheels with independent brake.
- » Suitable for hoist use: 160 cm.
- » Standard width: 90 cm.
- » Standard bed length: 196 cm for 190 cm mattress.

POWELIFT 135 MINI [Transfer Hoist]



DETAILS

	MAXIMUM LOAD CAPACITY <u>135 kg</u>
	MAXIMUM HIGH <u>184 cm</u>
	HOIST'S WIDTH <u>53 cm</u>
	LEG'S LENGHT <u>106 cm</u>

INCLUDED ELEMENTS



With filling harness

CHARACTERISTICS

- » Maximum load capacity: 135 kg.
- » Compact design.
- » Single castors with steel housing and double row bearings.
- » Electronic parts meet EN-60601-1 and EN-60601-1.2 standard.
- » Electric protection IP X4.
- » Audible low level battery alarm.
- » Control box with emergency stop button.
- » Integrated charger with 100-240V 50-60Hz entry.

POWELIFT 150 [Transfer Hoist]



DETAILS

	MAXIMUM LOAD CAPACITY <u>150 kg</u>
	MAXIMUM HIGH <u>174,5 cm</u>
	HOIST'S WIDTH <u>54 cm</u>
	LEG'S LENGHT <u>116 cm</u>

INCLUDED ELEMENTS



With filling harness

CHARACTERISTICS

- » Maximum load capacity: 150 Kg.
- » Electronic parts meet EN-60601-1 and EN-60601-1.2 standard.
- » Electric protection IPX4.
- » Integrated charger with 100-240V 50-60 Hz entry.
- » Control box with emergency stop button.
- » Externally chargeable battery option.
- » Audible low level battery alarm.
- » Manual actuator release option.
- » Padded hanger. Straps with non-return system.
- » 360° hanger rotation.
- » Four 100-mm Ø double wheels, back's wheel with independent brake.
- » Wired handset unit.
- » Actuator manually removable.
- » Wide duty range that allows lifting the patient from ground level.
- » Straps and harnesses included.
- » Breaks on the rear end wheels.
- » Detachable in two sections.
- » Easy to transport and store.
- » Epoxy-polyester coated steel structure.
- » Mast design that keeps liquids from getting inside the structure.
- » Base structure that provides a greater stability and safety.

POWELIFT 175 [Transfer Hoist]



DETAILS

	MAXIMUM LOAD CAPACITY <u>175 kg</u>
	MAXIMUM HIGH <u>186 cm</u>
	HOIST'S WIDTH <u>63 cm</u>
	LEG'S LENGHT <u>128 cm</u>

INCLUDED ELEMENTS



With filling harness

CHARACTERISTICS

- » Maximum load capacity: 175 Kg.
- » Meets ISO 10535: 2007 standard.
- » Electronic parts meet EN-60601-1 and EN-60601-1.2 standard.
- » Electric protection IPX4.
- » Battery charge: 200 work cycles.
- » Integrated charger with 230V 50Hz entry.
- » Control box with emergency stop button.
- » Externally chargeable battery option.
- » Audible low level battery alarm.
- » Manual actuator release option.
- » Padded hangar. Straps with non-return system.
- » 360° hanger rotation.
- » Four 100-mm Ø double wheels, back's wheel with independent brake.
- » Wired handset unit.
- » Wide duty range that allows lifting the patient from ground level.
- » Actuator manually removable.
- » Straps and harnesses included.
- » Breaks on the rear end wheels.
- » Detachable in two sections.
- » Easy to transport and store.
- » Epoxy-polyester coated steel structure.
- » Mast design that keeps liquids from getting inside the structure.
- » Base structure that provides a greater stability and safety.