


# Staldophone Spacer-Bracket

Tenor  
by  
Hans Ulrich Stalder

Visit [www.quantophon.com](http://www.quantophon.com)

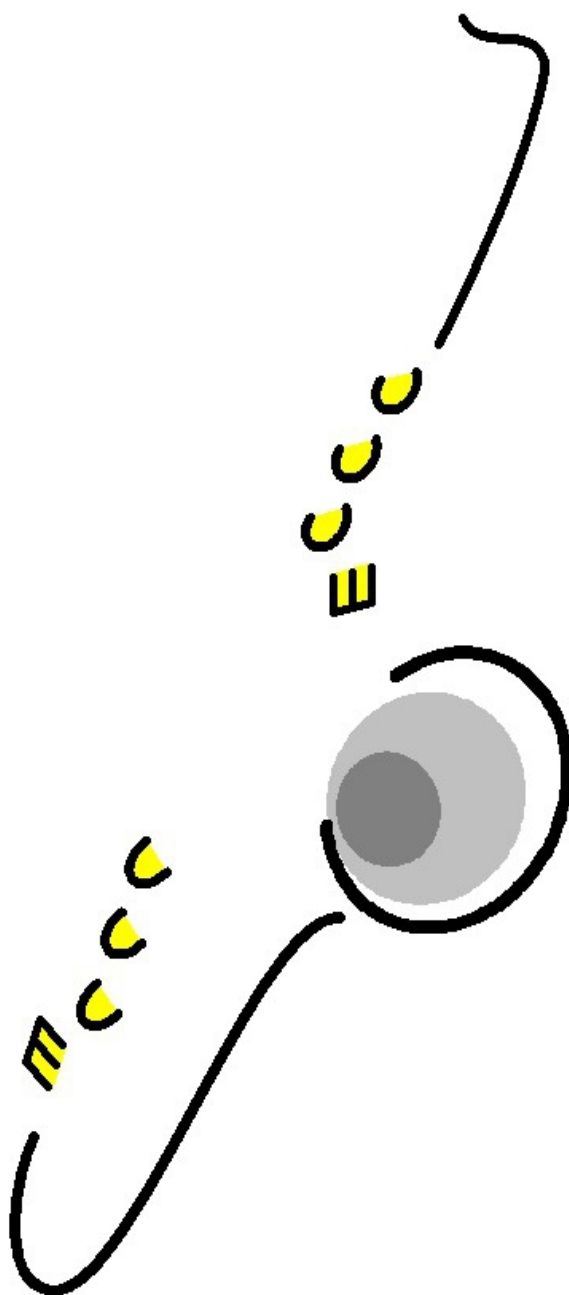

## Construction Notes


The present construction consists primarily of a misused jigsaw. The jigsaw has a leg length of 30 centimetres and a leg spacing of 14 centimetres.

Everything was unscrewed and the two ends shortened down to the last hole. Small rubber rings were attached wherever the jigsaw could come into contact with something. Short rubber hoses were also slipped over the two thigh ends.

In addition, three small snap hooks, two metal rings, a black cord and a cord stopper were required.

The distance from the carrying band ring (ring for sling) to the fretsaw arch is about 18 centimetres. The length can be adjusted with the cord stopper. The distance from the horn body to the jigsaw end holes is about eight centimetres.



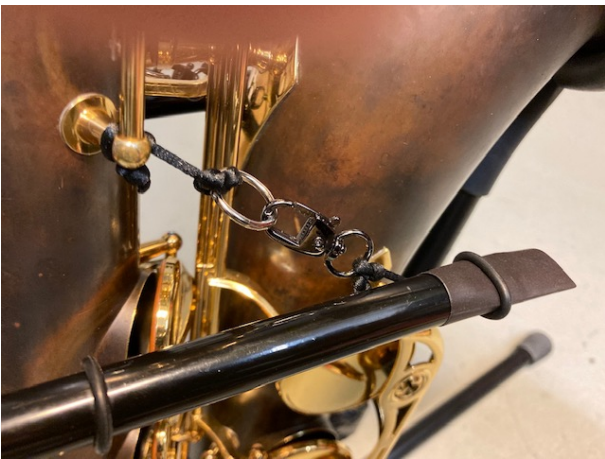

## Disclaimer

The truthfulness of this documentation has not been verified by third parties. No legal responsibility or liability of any kind can be assumed for incorrect information and its consequences. Subject to changes.

## Copyright

Protected by copyright. All rights reserved. This documentation may be copied and forwarded as long as there are no commercial intentions behind it. Copying of images and text for commercial purposes requires written approval.

In connection with this Spacer-Bracket, where it can be seen that its origin has this, the present naming is protected by copyright. Images, data and documents that are provided with a source in this work or that it is obvious that these data did not originate from the intellectual creation of the author of this work are also excluded. In the cases listed here, the provisions of the origin apply.

\* \* \* \* \*