




GRÚA TELESCÓPICA SOBRE CAMIÓN

TELESCOPIC TRUCK MOUNTED CRANE.
GRUE TÉLESCOPIQUE SUR CAMION
TELESKOPKRAN AUF SERIENFAHRGESTELL


GT-60/42



2.1.3 Abmessungen

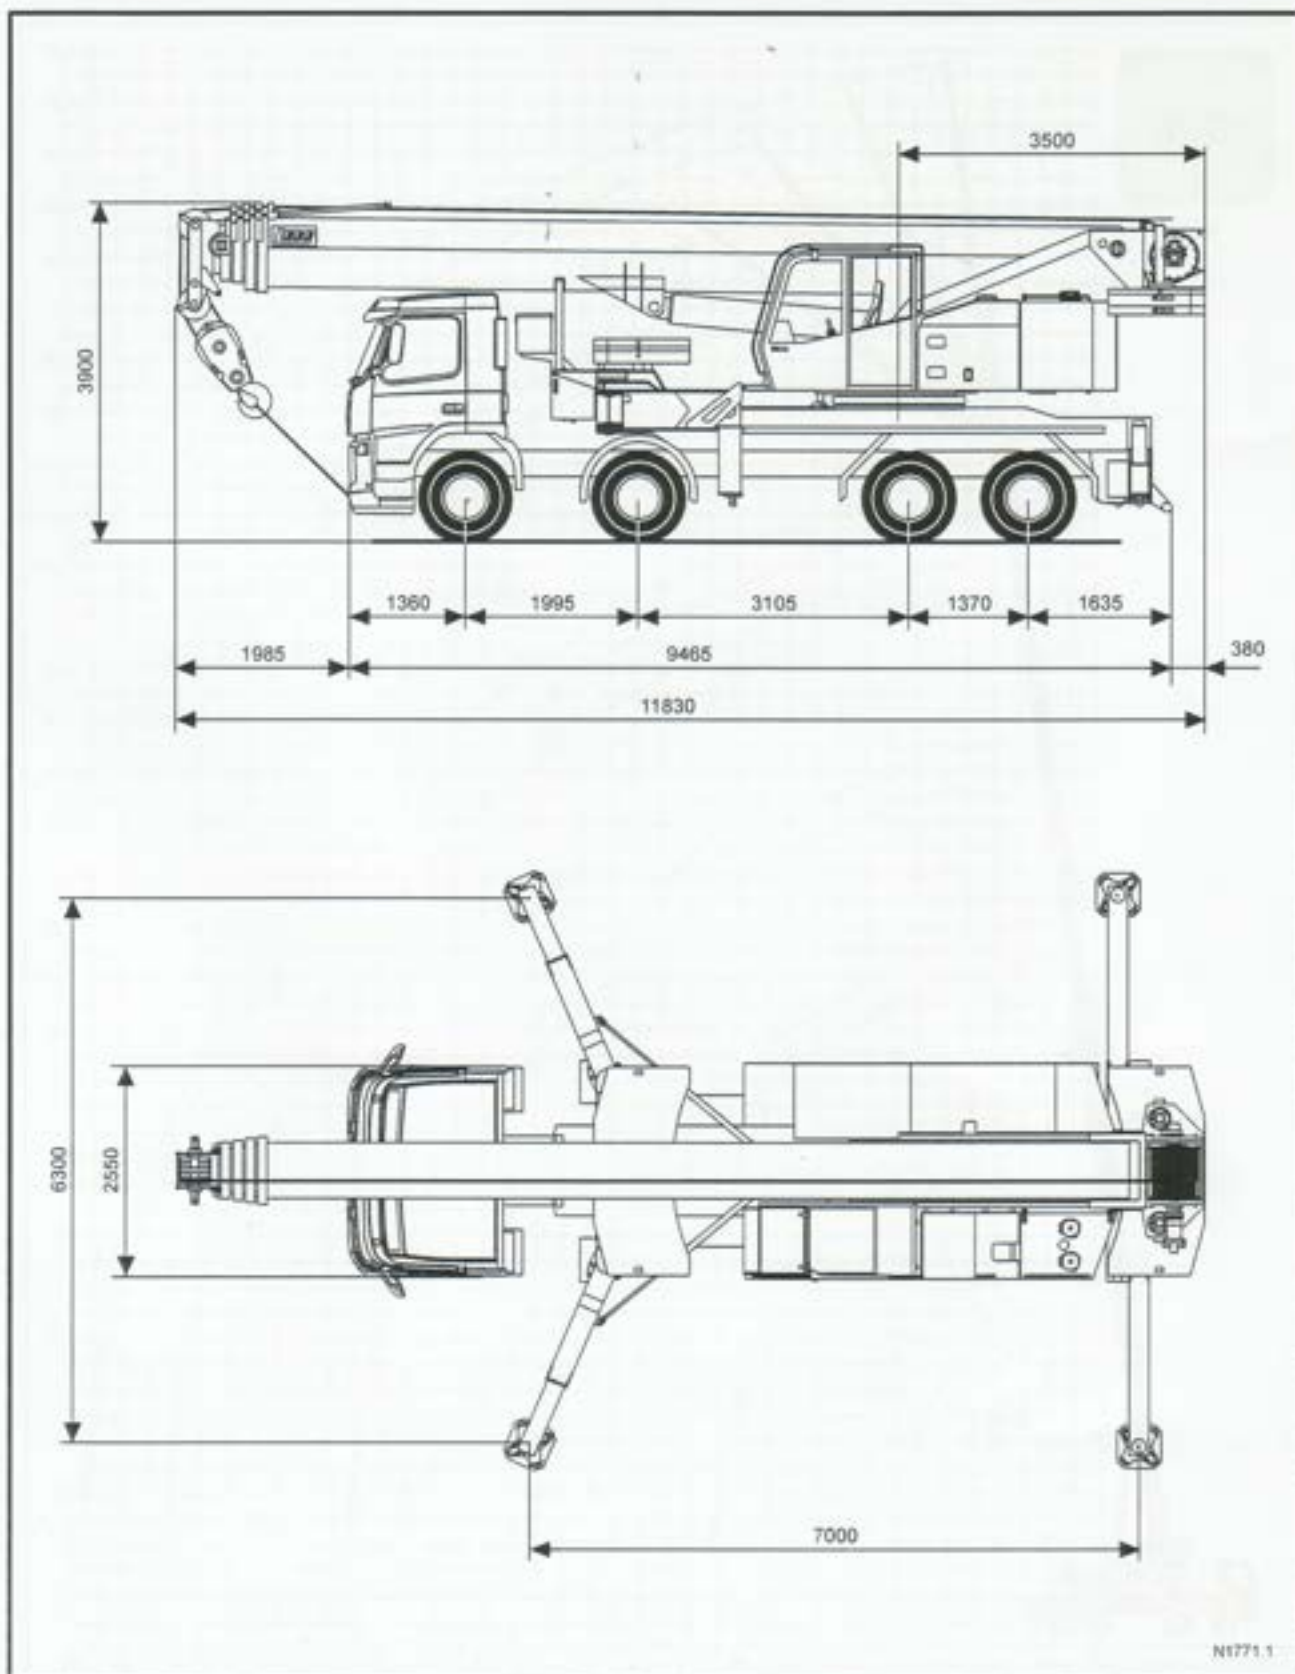

2.1.4 Ausladungsdiagramm

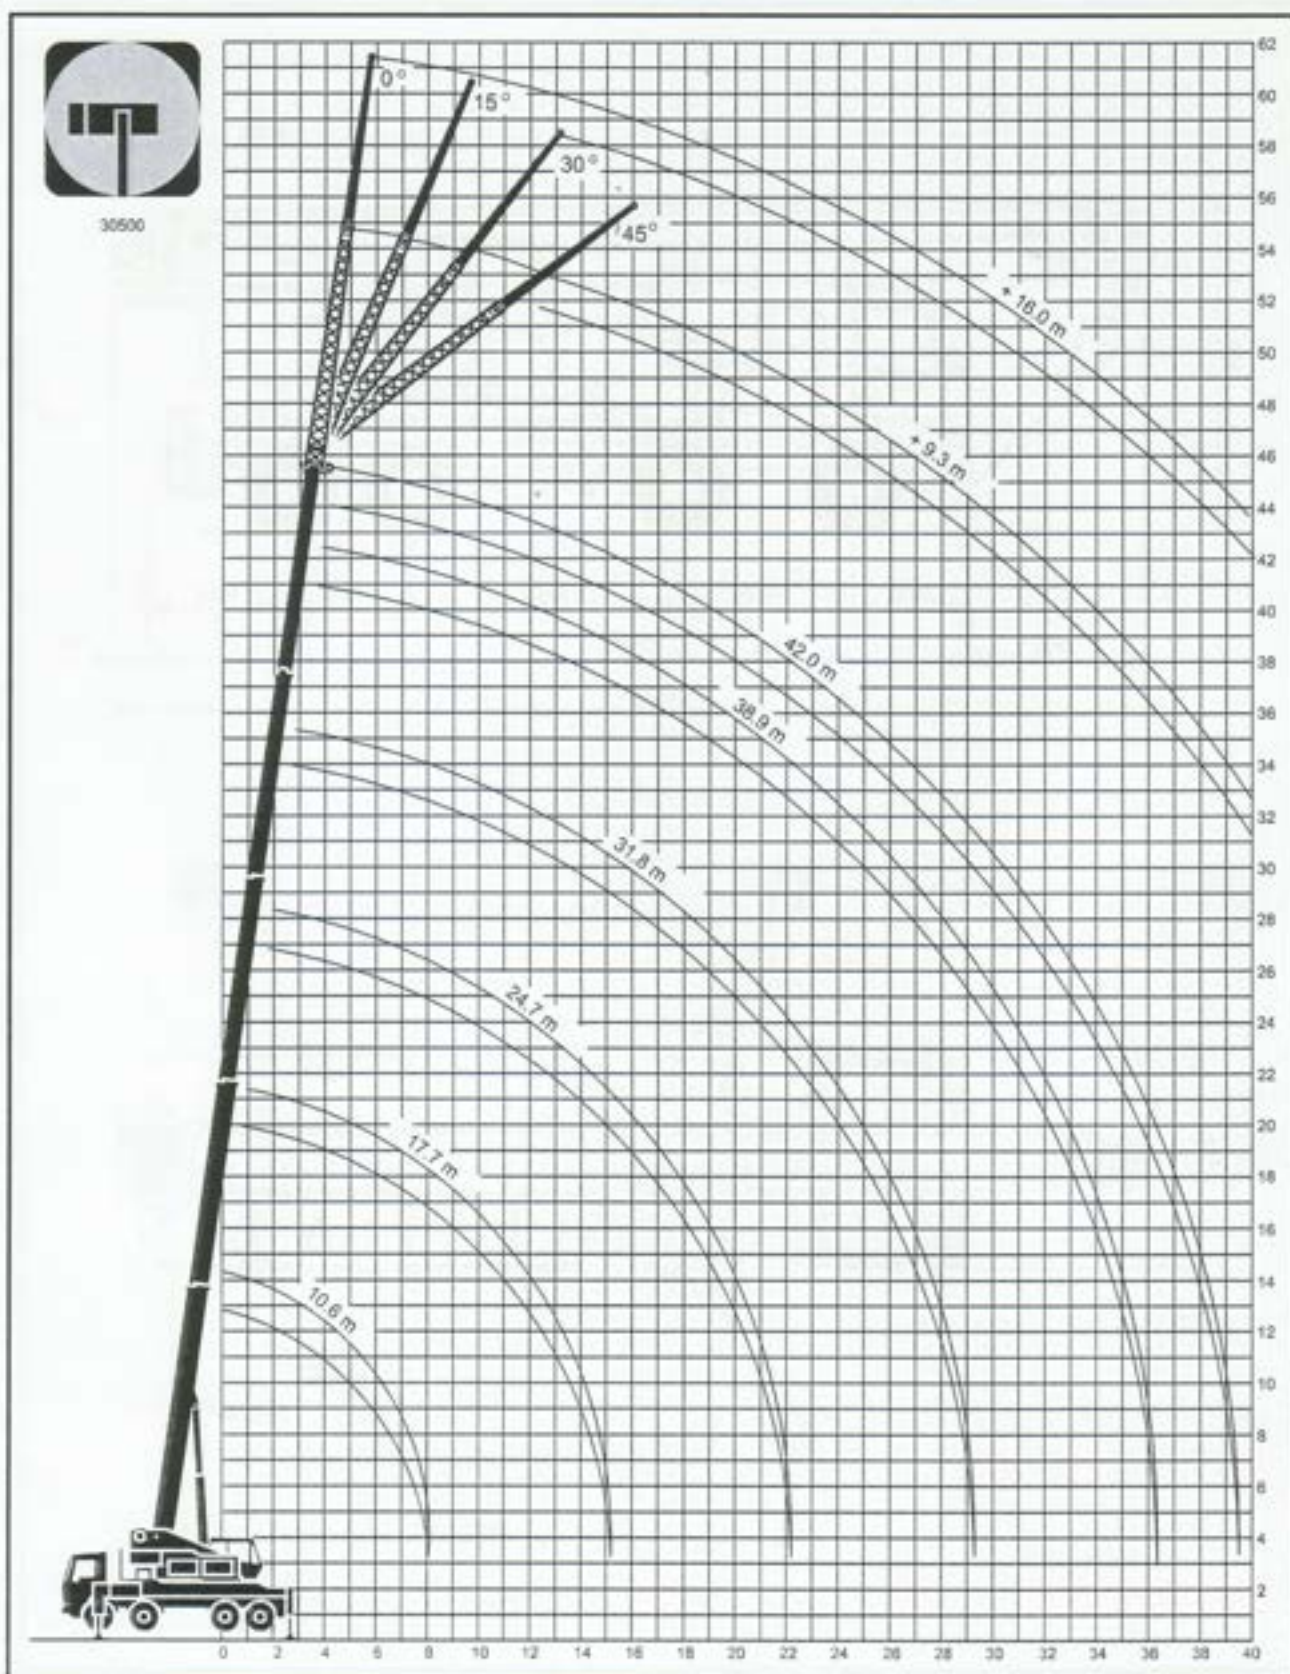

2.1.5 Traglasten-Tabellen

2.1.6.1 Traglasten-Tabelle 1

GT-60/42 mit 9 t Gegengewicht.

GT-60/42

(31810)

PLUMA PRINCIPAL. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360° MAIN BOOM. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360° FLÈCHE PRINCIPALE. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360° TELESKOPUSLEGER. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°											
RADIO RADIUS PORTÉE AUSLADUNG	75%									RADIO RADIUS PORTÉE AUSLADUNG	
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOPUSLEGERLÄNGEN										
	m	10.6 m	17.7 m	24.7 m		31.8 m		38.9 m	42.0 m		m
2.5	60 °									2.5	
3	50.0	34.0	21.3							3	
4	42.0	34.0	21.3	21.0	18.5					4	
5	34.0	31.8	21.3	21.0	18.2	15.5	13.0			5	
6	28.2	26.5	21.2	20.9	16.7	15.3	13.0	11.2		6	
7	23.0	22.0	20.9	20.6	15.1	15.0	12.7	10.9	9.7	7	
8	18.5	18.0	19.5	17.9	13.7	14.6	12.0	10.7	9.1	8	
9		14.7	16.9	15.5	12.5	13.9	11.0	10.4	8.7	9	
10		12.1	14.3	13.2	11.5	13.0	10.2	10.2	8.2	10	
12		8.5	10.6	9.7	9.8	10.5	8.7	9.7	7.7	12	
14		6.2	7.8	7.3	8.3	8.0	7.5	8.4	7.2	14	
16				5.7	6.9	6.2	6.5	6.7	6.7	16	
18				4.5	5.6	4.9	5.7	5.4	5.4	18	
20				3.5	4.5	3.9	4.9	4.3	4.3	20	
22				2.6	3.7	3.2	4.2	3.6	3.6	22	
24						2.6	3.6	3.0	3.0	24	
26						2.0	3.0	2.4	2.4	26	
28						1.6	2.5	2.0	2.0	28	
30								1.6	1.6	30	
32								1.3	1.3	32	
34								1.0	1.0	34	
36								0.8	0.8	36	
38									0.6	38	
I II-III-IV	0 0	90 0	0 30	90 30	0 60	90 60	0 90	90 90	100 100	I II-III-IV	

* Nach hinten +/- 10°.

° Durch eine zusätzliche Seilrolle.

2.1.5.2 Traglasten-Tabelle 2

GT-60/42 mit 9 t Gegengewicht.

GT-60/42

(32610)

PLUMA PRINCIPAL. GRÚA SOBRE ESTABILIZADORES PARCIALMENTE EXTENDIDOS 6.9 m x 4.3 m. ZONA DE TRABAJO 360°
MAIN BOOM. CRANE ON 6.9 m x 4.3 m OUTRIGGERS. ROTATION 360°
FLÈCHE PRINCIPALE. GRUE SUR STABILISATEURS À DEMI CALAGE (6.9 m x 4.3 m). ROTATION 360°
TELESKOPUSLEGER. ARBEITSZUSTAND: ABGESTÜTZT (6.9 m x 4.3 m). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG	75%									RADIO RADIUS PORTÉE AUSLADUNG	
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOP AUSLEGERLÄNGEN										
	m	10.6 m	17.7 m	24.7 m		31.8 m		38.9 m	42.0 m		m
2.5	60 °									2.5	
3	47.0	34.0	21.3							3	
4	36.5	28.8	21.3	21.0	18.5					4	
5	26.0	23.6	21.0	21.0	16.5	15.5	13.0			5	
6	19.5	19.1	19.7	19.0	14.7	15.3	13.0	11.2		6	
7	15.0	14.6	16.8	15.5	13.2	13.0	12.5	10.7	9.7	7	
8	11.5	10.9	13.8	12.5	11.8	11.2	11.5	10.0	9.1	8	
9		8.7	11.0	10.0	10.5	9.6	10.3	9.2	8.7	9	
10		7.3	8.8	8.0	9.2	8.2	9.2	8.2	8.1	10	
12		5.0	6.5	6.0	7.3	6.2	7.0	6.4	6.4	12	
14		3.2	4.6	4.4	5.7	4.6	5.5	5.0	5.0	14	
16				3.2	4.4	3.6	4.4	3.9	3.9	16	
18				2.3	3.4	2.8	3.6	3.1	3.1	18	
20				1.7	2.6	2.1	2.9	2.4	2.4	20	
22				1.0	2.1	1.6	2.4	1.9	1.9	22	
24						1.1	1.9	1.5	1.5	24	
26						0.6	1.5	1.0	1.0	26	
28							1.1	0.6	0.6	28	
I	0	90	0	90	0	90	0	90	100	I	
II-III-IV	0	0	30	30	60	60	90	90	100	II-III-IV	

* Nach hinten +/- 10°.

° Durch eine zusätzliche Seilrolle.