


Stepper motor NG 3-phase 325 V DC Used together with VariMax25, 50 och 100 NG

F22025401	VariMax-motor25 NG
F22050401	VariMax-motor50 NG
F22100601	VariMax-motor100 NG



- Adapted for variable speed control
- Compact built-in dimensions
- CE-approved
- Five-year product warranty

DIMENSIONS

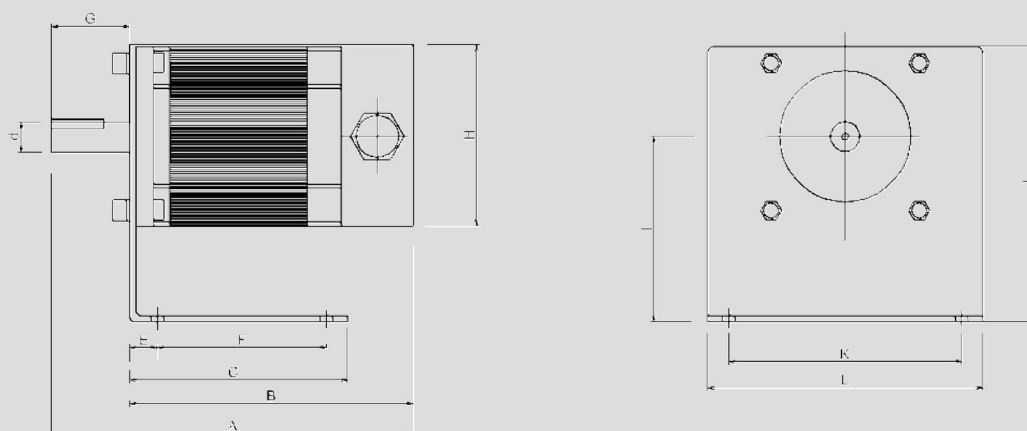

Construction dimensions (mm)

MOTOR	A	B	C	d	E	F	G	H	I	J	K	L
25	141	105	103	14	13	80	40	85	67	110	110	130
50	171	131	103	14	13	80	40	85	87	130	110	130
100	177	145	103	19	13	80	35	110	87	142	130	150

Technical data

VariMax-motor NG	25	50	100
Max torque	2 Nm	4 Nm	10 Nm
Min rotation speed	1 rpm	1 rpm	1 rpm
Max rotation speed	350 rpm	375 rpm	400 rpm
Motor temp. mantle max	110 °C	110 °C	110 °C
Ambient temperature	-30 - +45 °C -40 - +45 °C *)	-30 - +45 °C -40 - +45 °C *)	-30 - +45 °C -40 - +45 °C *)
Protection form	IP54	IP54	IP54
Weight incl. motor bracket	2.6 kg	4 kg	8.4 kg

*) Note, at -40 °C, the control unit must be connected to power all the time

Max rotor diameter at rotor speed 12 rpm

VariMax-motor NG	25	50	100
Rotor diameter	1500 mm	2500 mm	4000 mm