X

0 mm 2 mm

JOINTBOY

The perfect tool for every elastic joint!

Standard

Because of the special active ingredient, JOINTBOY can be used

without parting agents.

For all types of silicon and acrylic!

0 mm:

For the complete removal of freshly applied joint material.

2/3/4/5/6 mm:

For all standard joints <u>not subject</u> <u>to</u> traction or pressure stresses (e.g. mirrors, wash hand basins).


8 / 10 mm:

For all standard joints <u>subject to</u> traction or pressure stresses (e.g. baths, showers, kitchen worktops, corners on floors/walls with tiles).

14 / 20 mm:

For wide to extremely wide joints <u>subject to</u> traction or pressure stresses (e.g. corners on floors/walls with tiles, masonry, refurbishment etc.).

For **expansion joints** (e.g. on floors) with rounded tiles and for joints that are to be recessed a round tool should be used.

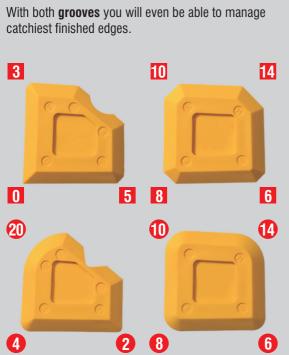



JOINTBOY STANDARD works without parting agents. There is no need to dampen in the sealing compound with a detergent solution.

You will also be able to produce perfect seals on connecting joints and expansion joints without masking or time-consuming follow-up work.

JOINTBOY STANDARD is a special tool in tested craftsman quality: it is resistant to acids and friction and is extremely flexible.

Production and distribution:



HS Schneidsysteme Wittumstraße 12 D-76707 Hambrücken

Phone (+49) 0 72 55 - 27 12 Fax (+49) 0 72 55 - 9 04 65

info@schneidsystem.de www.schneidsystem.de

