

PK 78002 SH

PALFINGER

LIFETIME EXCELLENCE

DAS DUAL POWER SYSTEM ERMÖGLICHT HOHE REICHWEITEN ABER AUCH SCHWERE LASTBETRIEB







PK 78002 SH

HIGH PERFORMANCE


D

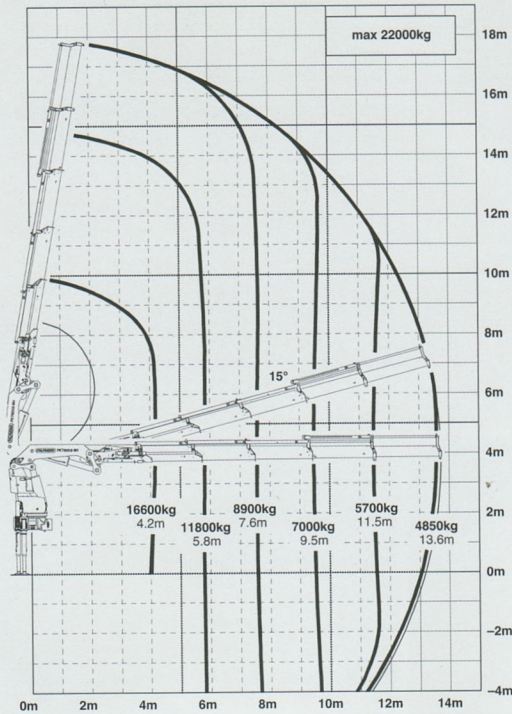


E

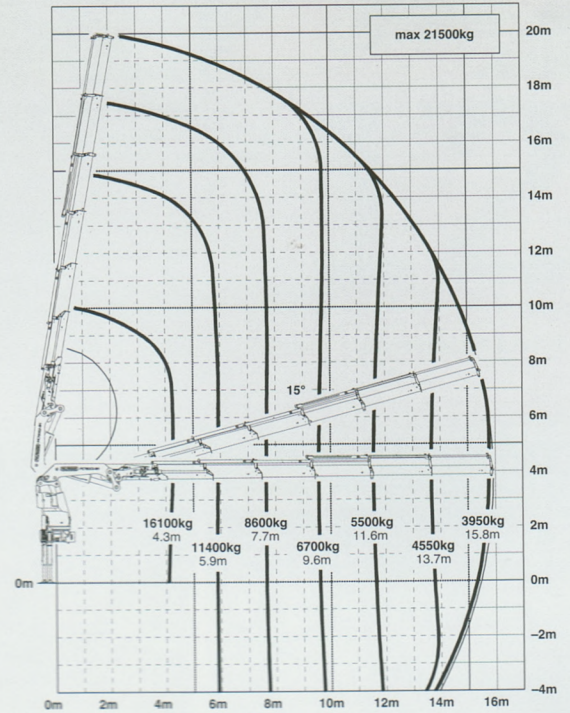

F

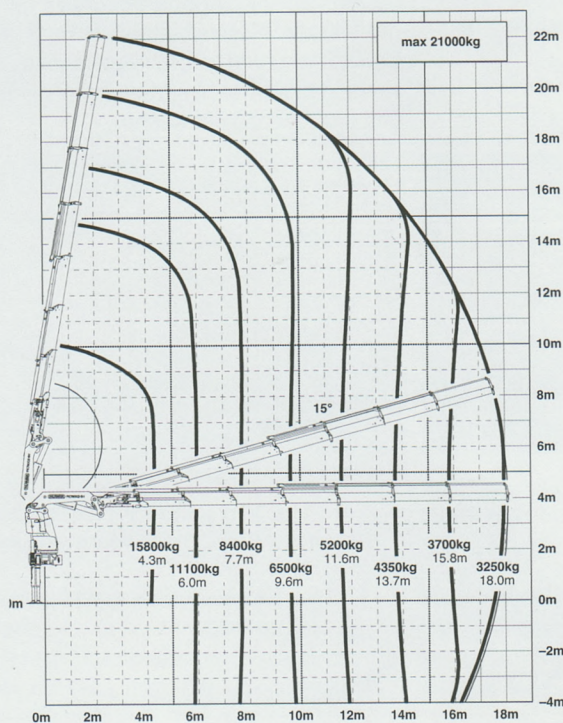


G

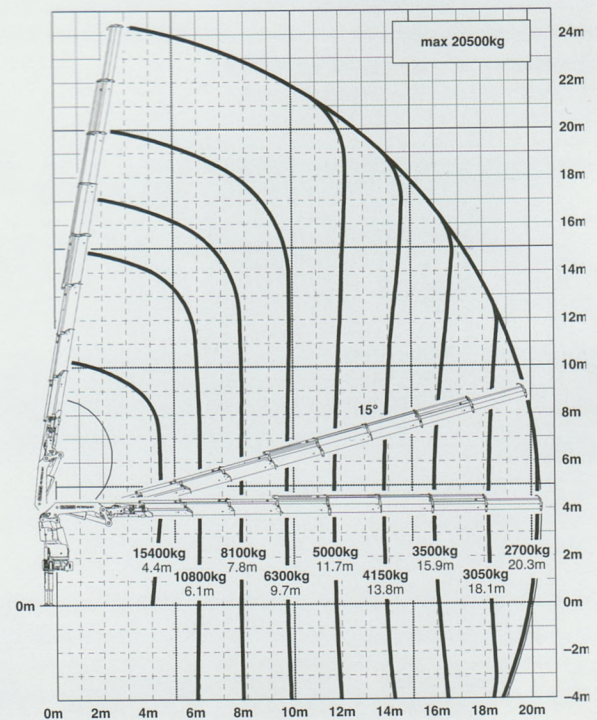


MEHR HUBKRAFT WENN ES DRAUF ANKOMMT

E PJ170E JV1 DPS PLUS

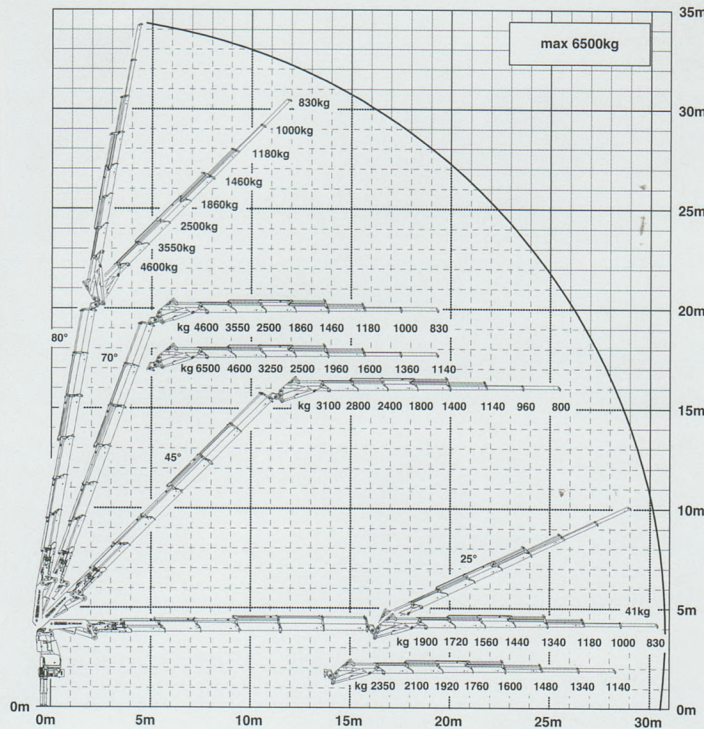

F PJ125E JV1 DPS PLUS

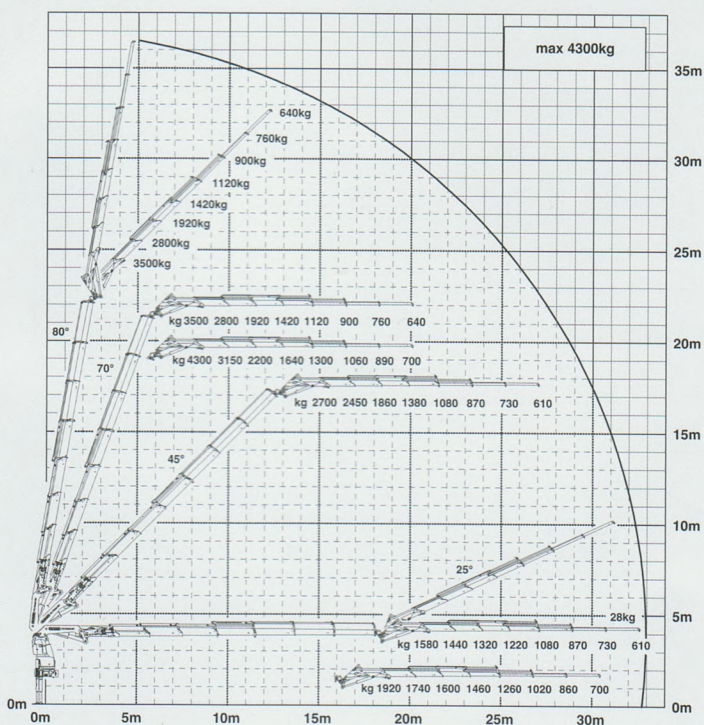

HUBKRÄFTE

A	max.	23000 kg / 225,6 kN
	4,0 m	17900 kg / 175,6 kN
	5,7 m	12900 kg / 126,5 kN
	7,4 m	10000 kg / 98,1 kN

B	max.	23000 kg / 225,6 kN
	4,1 m	17600 kg / 172,7 kN
	5,7 m	12600 kg / 123,6 kN
	7,5 m	9600 kg / 94,2 kN
	9,4 m	7700 kg / 75,5 kN

C	max.	23000 kg / 225,6 kN
	4,1 m	17300 kg / 169,7 kN
	5,7 m	12300 kg / 120,7 kN
	7,5 m	9400 kg / 92,2 kN
	9,4 m	7400 kg / 72,6 kN
	11,4 m	6100 kg / 59,8 kN

D	max.	22000 kg / 215,8 kN
	4,2 m	16600 kg / 162,8 kN
	5,8 m	11800 kg / 115,8 kN
	7,6 m	8900 kg / 87,3 kN
	9,5 m	7000 kg / 68,7 kN
	11,5 m	5700 kg / 55,9 kN
	13,6 m	4850 kg / 47,6 kN

E	max.	21500 kg / 210,9 kN
	4,2 m	16100 kg / 157,9 kN
	5,9 m	11400 kg / 111,8 kN
	7,6 m	8600 kg / 84,4 kN
	9,5 m	6700 kg / 65,7 kN
	11,5 m	5500 kg / 54,0 kN
	13,6 m	4550 kg / 44,6 kN
	15,7 m	3950 kg / 38,7 kN

F	max.	21000 kg / 206,0 kN
	4,3 m	15800 kg / 155,0 kN
	6,0 m	11100 kg / 108,9 kN
	7,7 m	8400 kg / 82,4 kN
	9,6 m	6500 kg / 63,8 kN
	11,6 m	5200 kg / 51,0 kN
	13,7 m	4350 kg / 42,7 kN
	15,8 m	3700 kg / 36,3 kN
	18,0 m	3250 kg / 31,9 kN

G	max.	20500 kg / 201,1 kN
	4,4 m	15400 kg / 151,1 kN
	6,1 m	10800 kg / 105,9 kN
	7,8 m	8100 kg / 79,5 kN
	9,7 m	6300 kg / 61,8 kN
	11,7 m	5000 kg / 49,1 kN
	13,8 m	4150 kg / 40,7 kN
	15,9 m	3500 kg / 34,3 kN
	18,1 m	3050 kg / 29,9 kN
	20,3 m	2700 kg / 26,5 kN
	22,6 m*	1900 kg / 18,6 kN
	24,9 m*	1200 kg / 11,8 kN

*mechanische Verlängerung