

LAPIERRE

2 0 2 6



Table of contents.

BRANDING

No Limits. Just Peaks.	p.4
Innovation	p.6

ROAD

Crosshill AL	p.124
Crosshill CF	p.132
Sensium	p.142
Pulsium	p.150
Xelius DRS	p.166
Aerostorm DRS	p.190

E-MTB

Overvolt HT	p.10
Overvolt TR	p.18
Overvolt AM AL	p.26
Overvolt AM CF	p.34

LIFESTYLE

E-Explorer	p.200
------------	-------

MTB

Prorace Kids	p.50
Prorace	p.60
Prorace CF	p.70
XRM	p.78
Zesty TR	p.88
Zesty CF	p.96
Spicy CF	p.108

ANNEX

Contacts	p.210
Distributors	p.212
Service Portal	p.214
XLC	p.216
Range of use	p.219
General Terms & Conditions	p.224
Imprint	p.231



No Limits. Just Peaks.

EN Every ride is a new summit, every challenge an opportunity to grow. It's not about the podium; it's about the pursuit. The relentless drive to improve, to test limits, and to redefine what's possible on the bike.

Pain is temporary. Effort is eternal. The ride never truly ends. Because the real victory isn't measured in trophies, but in the journey, the grit, and the will to reach the next peak.

DE Jede Fahrt ist ein Höhepunkt, jede Challenge ist eine Chance zu wachsen. Es geht nicht um das Podium – es geht um den Weg dorthin und um den unermüdlichen Antrieb, sich zu verbessern, Grenzen zu verschieben und neu zu definieren, was auf dem Rad möglich ist.

Schmerz vergeht. Erfolg bleibt. Die Fahrt endet nie. Der wahre Sieg zeigt sich nicht in Trophäen, sondern in der Reise, im Durchhaltevermögen und darin, den nächsten Peak zu erreichen.

OVERVOLT AM CF NEW

Dominate the mountain.

EN The ultimate carbon off-road machine. Precision-engineered for peak performance, it combines cutting-edge technology with sleek design to push the limits of every ride.

DE Die ultimative Offroad-Maschine aus Carbon – entwickelt für maximale Performance. Sie kombiniert modernste Technologie mit einem klaren, kompromisslosen Design und holt aus jeder Fahrt das Maximum heraus.



Model Shown
Overvolt AM CF 10.8



E-Mountain Bikes

EN Feel the essence of the Gravity Logic Project DNA in our e-MTB range. This proven technology has dominated the UCI E-XC World Championship for three consecutive years.


DE Spüre die Essenz der Gravity-Logic-DNA in unseren E-MTBs. Diese bewährte Technologie hat die UCI E-XC-Weltmeisterschaft drei Jahre in Folge dominiert.



	XS	S	M	L	XL	XXL
Overvolt HT High	-	156-174	172-182	180-190	188-198	-
Overvolt TR	-	150-170	168-178	176-186	>184	-
Overvolt AM AL	-	160-175	170-185	180-190	>185	-
Overvolt AM CF	-	160-175	170-185	180-190	>185	-

E-Mountain Bikes

RANGE OVERVIEW

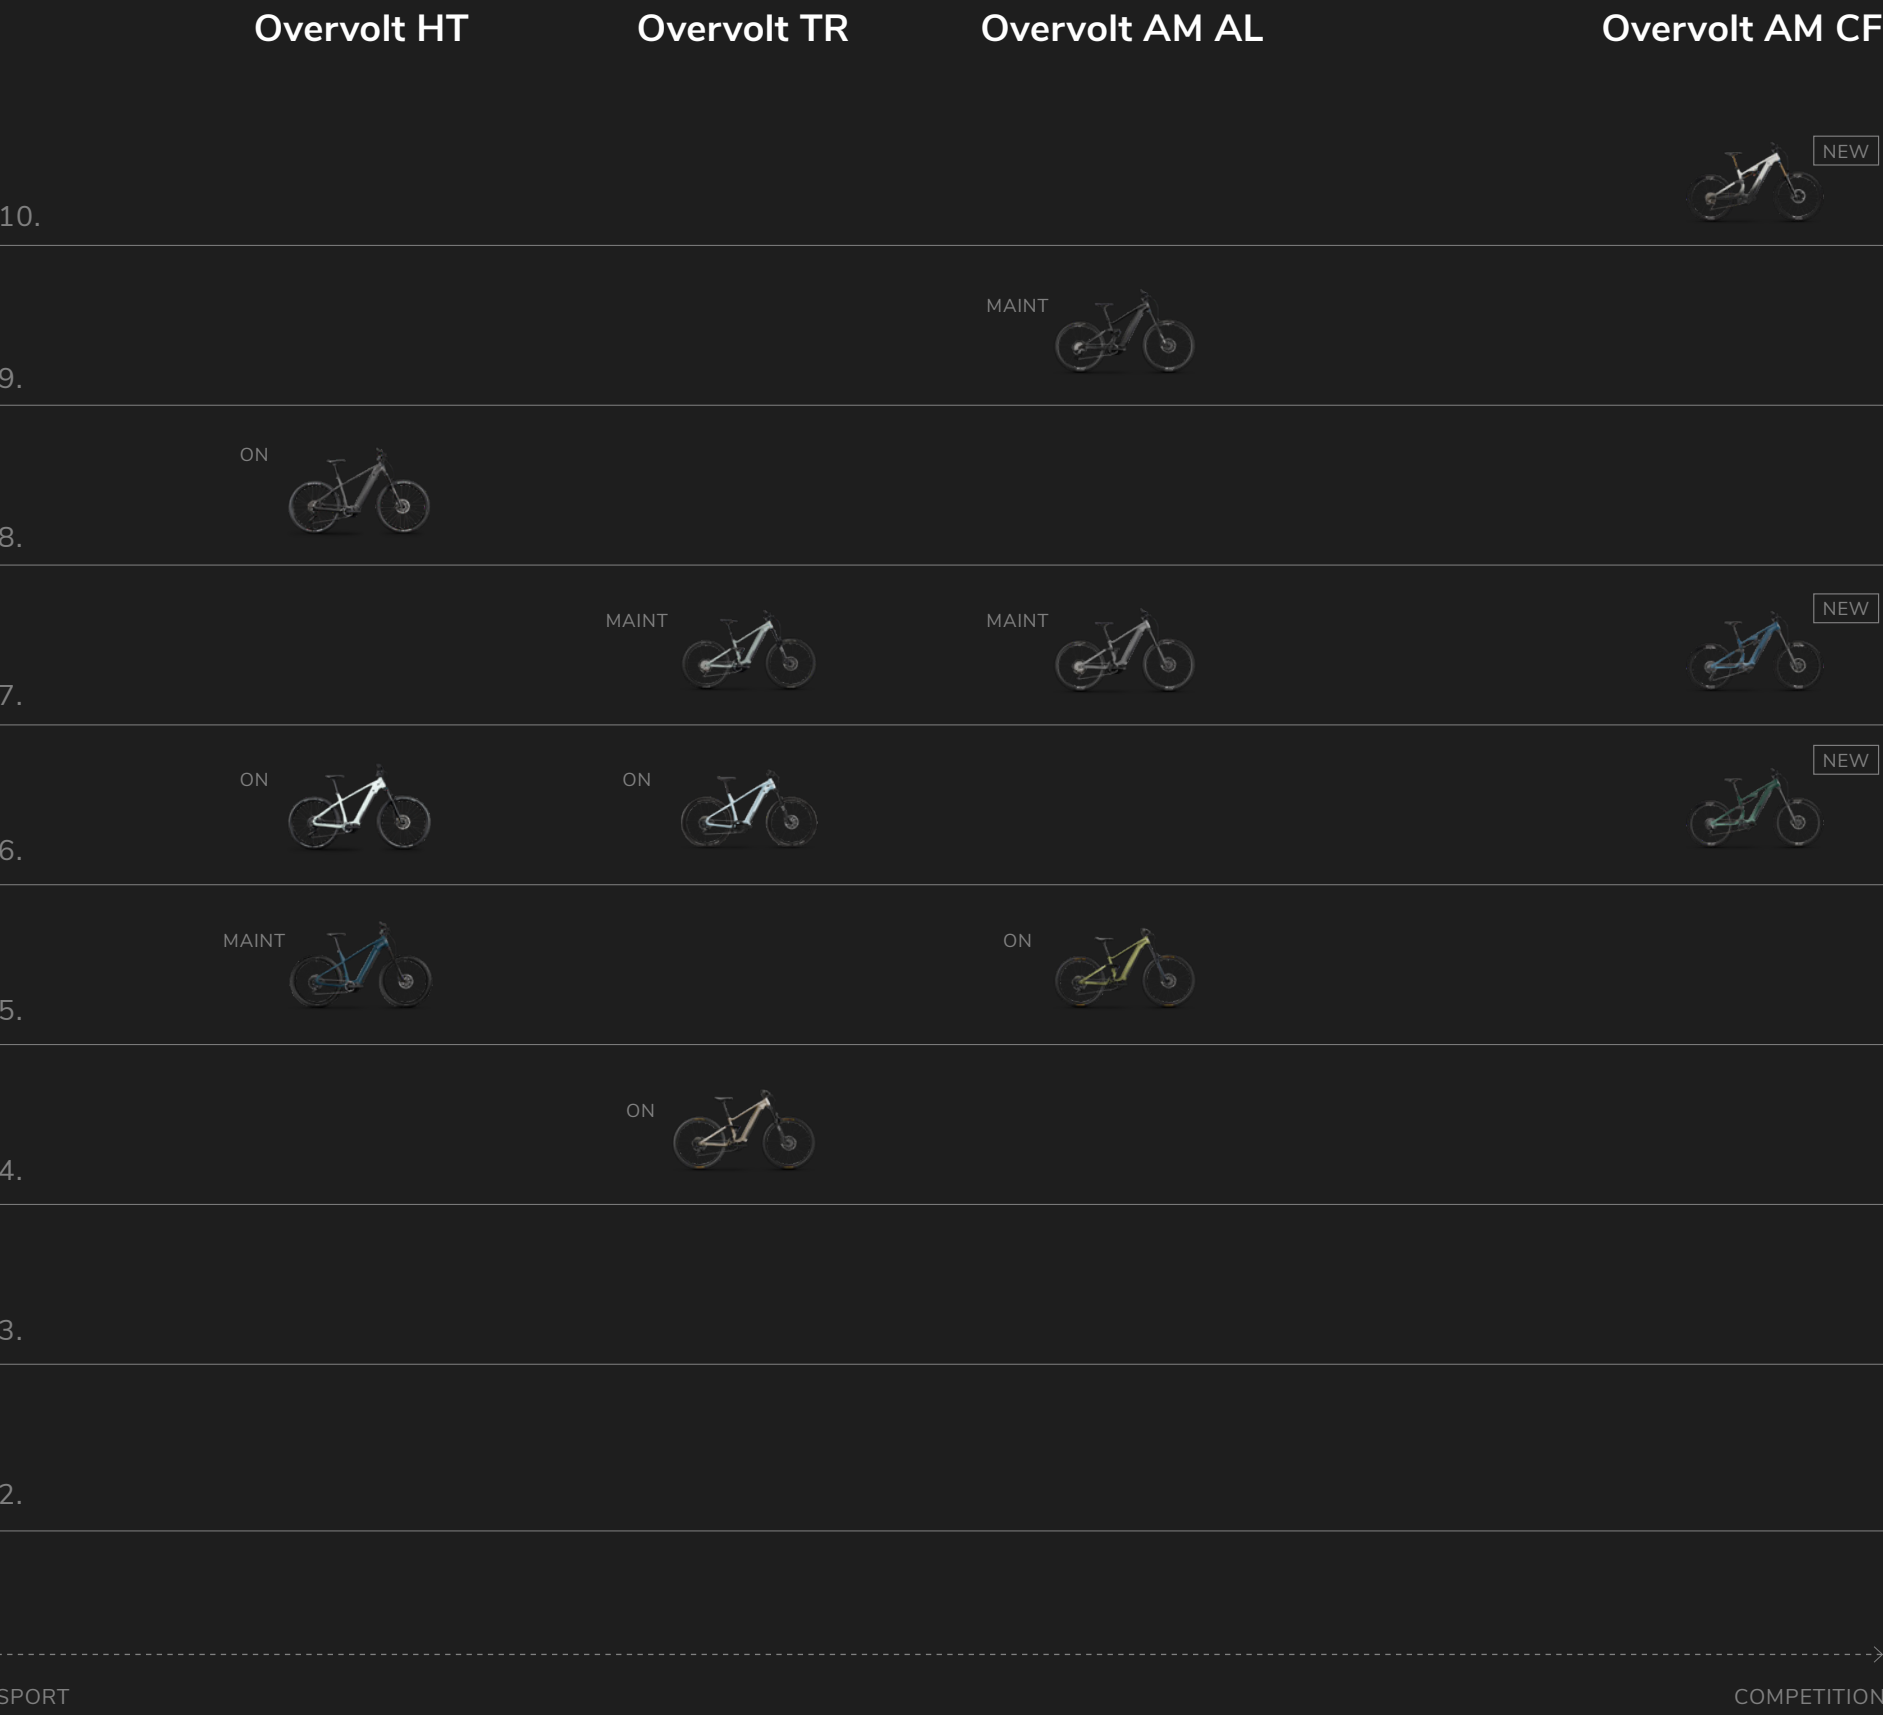

Overvolt HT

RANGE

EN Combining the handling of a hardtail mountain bike with the efficiency of an e-bike, these hardtail e-mountain bikes have been developed to help you get started on the trails and discover the joy of electric mountain biking.

DE Die Agilität eines Hardtails kombiniert mit der Power eines E-Bikes. Das Overvolt HT wurde gebaut, um dich auf die Trails zu bringen und dir das Gefühl zu geben, als würde jeder Anstieg neue Möglichkeiten eröffnen. Entdecke, wie viel Spaß E-Mountainbiken wirklich machen kann.



The Overvolt HT, much more than a hardtail bike:

- Balanced semi-rigid design
- Versatile sporty motorization
- A bike to take everywhere (hiking, traveling, exploring...)

Das Overvolt HT, viel mehr als nur ein Hardtail:

- Ausgewogenes Design und Steifigkeit
- Vielseitiger, sportlicher Antrieb
- Ein treuer Begleiter für jedes Abenteuer



Overvolt HT 5.6 High

Tidal Teal Blue | LOCUA
Bosch Gen 5 PX | 600 Wh



Overvolt HT 6.6 High

Flying Green | LODTA
Bosch Gen 5 CX | 600 Wh



Overvolt HT 8.8 High

Anthra Grey | LOETA
Bosch Gen 5 CX | 800 Wh

Overvolt HT 5.6 High

TIDAL TEAL BLUE

Ref. LOCUA



Overvolt HT 6.6 High

FLYING GREEN

Ref. LODTA



Frame	Overvolt Alloy
Fork	SR Suntour XCM34 Coil 15x110 29" 120mm travel 44mm offset
Rear derailleur	Shimano CUES U4000 9s
Crankset	XLC 160mm + 34T chainring
System	Bosch Performance line PX, 90 Nm, 700 W / Powertube 600Wh / Bosch Intuvia 100
Sprocket	Shimano CUES LG300 11-41T 9s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U4000 9s
Headset	Feimin-FPH856U 1.1/8" - 1.5 Tapered
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 50mm
Seatpost	XLC SP-R30 Ø: 34.9mm, L: 350mm
Saddle	XLC SA-S11 Sport Comfort Steel Rail 155mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M39 32H, 30-584 (S) / 30-622 (M,L,XL)
Tires	XLC VT-M30 Cirrus by Mitas 66-584 (S) / 66-622 (M,L,XL)
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever

Frame	Suprême 5 alloy
Fork	SR Suntour XCR34 Coil 15x110 29" 120mm travel 44mm offset
Rear derailleur	Shimano CUES U6000 10/11s
Crankset	XLC 160mm + 34T chainring
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube 600Wh / Bosch Purion 200
Sprocket	Shimano CUES LG300 11-48T 10s
Chain	Shimano CUES LG500 9/10/11s
Brakes	Shimano MT401 2 pistons
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U6000 10s
Headset	Feimin-FPH856U 1.1/8" - 1.5 Tapered
Handlebar	Lapierre Alloy 6061 DB, Width: 760mm, Rise: 15mm (S,M) 30mm (L,XL), Ø: 31.8mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre alloy forged, 0°, Ø: 31.8mm, L: 40mm (S,M), 50mm (L,XL)
Seatpost	Lapierre Alloy Ø: 34.9mm, L: 300mm(S,M)/350mm(L)/400mm(XL)
Saddle	Selle Royal Vivo Men
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, Microspline
Rims	Ryde Disc30 32H, 30-584 (S) / 30-622 (M,L,XL) Black Anod.
Tires	Schwalbe Nobby Nic Perf ADDIX 67EPI 65-584 (S) / 62-622 (M,L,XL)
Pedals	XLC by VP
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever

Overvolt HT 8.8 High

ANTHRA GREY

Ref. LOETA



Frame	Suprême 5 alloy
Fork	RockShox Psylo Silver R 15x110 29" 120mm travel 44mm offset
Rear derailleur	Shimano CUES U6000 10/11s
Crankset	XLC 160mm + 34T chainring
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube 800Wh / Bosch Purion 200
Sprocket	Shimano CUES LG400 11-50T 11s
Chain	Shimano CUES LG500 9/10/11s
Brakes	Shimano MT401 2 pistons
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U6000 11s
Headset	Feimin-FPH856U 1.1/8" - 1.5 Tapered
Handlebar	Lapierre Alloy 6061 DB, Width: 760mm, Rise: 15mm (S,M) 30mm (L,XL), Ø: 31.8mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre alloy forged, 0°, Ø: 31.8mm, L: 40mm (S,M), 50mm (L,XL)
Seatpost	Jovial A1H Ø: 34.9mm, L: 100mm(S,M)/125mm(L,XL)
Saddle	Selle Royal Vivo Men
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, Microspline
Rims	Ryde Disc30 32H, 30-584 (S) / 30-622 (M,L,XL) Black Anod.
Tires	Front : Maxxis Minion DHF EXO TR 27.5x2.6(S) 29x2.50 WT(M,L,XL) Rear : Maxxis Rekon Exo TR 27.5x2.6(S) 29x2.40(M,L,XL)
Pedals	XLC by VP
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever

Non-binding illustrations.

Techzone

OVERVOLT HT




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

OVERVOLT HT

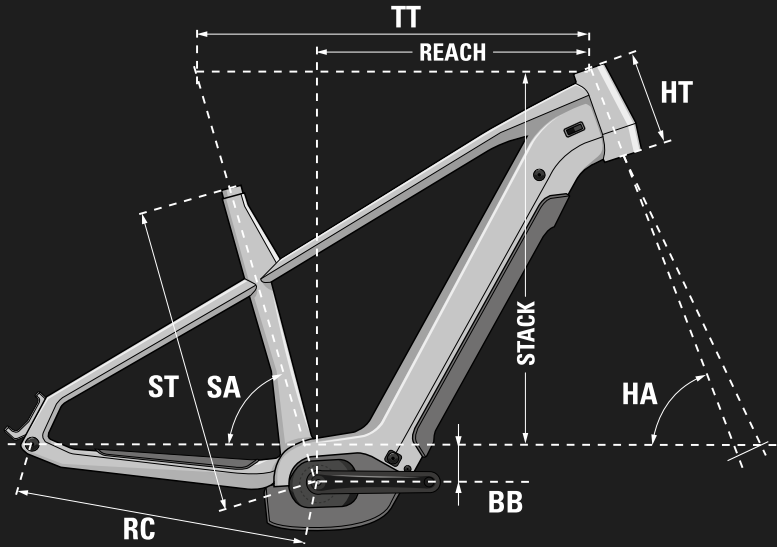

Size	S	M	L	XL
ST [mm]	400	450	500	550
SA [°]	74	74	74	74
HT [mm]	140	140	155	170
HA [°]	68	68	68	68
TT [mm]	610	620	635	658
CS [mm]	465	465	465	465
BB drop [mm]	-60	-60	-60	-60
Fork + Headset [mm]	521	518	521	521
Fork rake [mm]	44	44	44	44
WB [mm]	1171	1181	1198	1223
Stack [mm]	656	654	670	684
Reach [mm]	422	433	443	462
User	156-174	172-182	180-190	188-198
Ref.	LO___400	LO___450	LO___500	LO___550

Overvolt TR

RANGE

EN Designed to help you roam mountain trails and rugged tracks without limits.

DE Entwickelt, um dich mühelos über jeden Berg und jedes Terrain zu tragen – ohne Kompromisse.



The Overvolt TR,
more than just a trail MTB:

- A full-suspension bike enabling aggressive riding on trails
- Versatile and enduring bike
- Motorization that pushes the limits

Das Overvolt TR,
weit mehr als nur ein Trail-Bike:

- Vollgefedert für dynamisches, kontrolliertes Fahren auf jedem Trail
- Vielseitig, zuverlässig und bereit für lange Touren
- Kraftvoller Antrieb, der dich weiter bringt, als du denkst



ON

Overvolt TR 4.6

Black | LOLTA
Bosch Gen 5 CX | 600 Wh



ON

Overvolt TR 6.8

Dry Stone | LOLTB
Bosch Gen 5 CX | 800 Wh



MAINT

Overvolt TR 7.8

Fresh Mint Blue | LOLUC
Bosch Gen 5 CX | 800 Wh

Overvolt TR 4.6

BLACK

Ref. LOLTA



Overvolt TR 6.8

DRY STONE

Ref. LOLTB



Frame	Suprême 5 alloy
Fork	RockShox Psylo Silver R 15x110 29" 140mm travel 44mm offset
Shock	Lapierre Shock 185x50mm Trunnion/15x8mm
Rear derailleur	Shimano CUES U6000 10s
Crankset	Samox EC40-F13-ISIS 160mm + E13 Helix Core steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 600Wh / Kiox 300
Sprocket	Shimano CUES LG300 11-48T 10s
Chain	Shimano CUES LG500 9/10/11s
Brakes	Shimano M4100 4 (front) / 2 (rear) pistons
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U6000 10s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	Lapierre Thirty One 6061DB, Width: 760mm, Rise: 15mm (S,M) 30mm (L,XL), Ø: 31.8mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre Thirty One alloy, 0°, Ø: 31.8mm, L: 45mm (S,M), 50mm (L,XL)
Seatpost	Lapierre dropper by JD YSP18, Ø: 31.6mm, travel 100mm (S), 130mm (M), 150mm (L), 170mm (XL) + Shimano lever
Saddle	Selle Royal Vivo Men
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, HG driver
Rims	Ryde Disc30 32H, 30-622 Black Anod.
Tires	Front : Continental Kryptotal F Enduro Soft 60-622 Rear : Continental Xynotal R Enduro Soft 60-622
Pedals	XLC by VP
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves Connect module + range extender compatible

Frame	Suprême 5 alloy
Fork	RockShox Psylo Silver RC 15x110 29" 140mm travel 44mm offset
Shock	Lapierre Shock 185x50mm Trunnion/15x8mm
Rear derailleur	Shimano CUES U6000 11s
Crankset	E13 Helix Core 160mm + E13 Helix Core steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Kiox 300
Sprocket	Shimano CUES LG400 11-50T 11s
Chain	Shimano CUES LG500 9/10/11s
Brakes	Shimano M4100 4 (front) / 2 (rear) pistons
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U6000 11s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	Lapierre Thirty One 6061DB, Width: 760mm, Rise: 15mm (S,M) 30mm (L,XL), Ø: 31.8mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre Thirty One alloy, 0°, Ø: 31.8mm, L: 45mm (S,M), 50mm (L,XL)
Seatpost	Lapierre dropper by JD YSP18, Ø: 31.6mm, travel 100mm (S), 130mm (M), 150mm (L), 170mm (XL) + Shimano lever
Saddle	Selle Royal Vivo Men
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, HG driver
Rims	Ryde Disc30 32H, 30-622 Black Anod.
Tires	Front : Continental Kryptotal F Enduro Soft 60-622 Rear : Continental Xynotal R Enduro Soft 60-622
Pedals	XLC by VP
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves Connect module + range extender compatible

Overvolt TR 7.8

FRESH MINT BLUE

Ref. LOLUC



Frame	Overvolt Alloy
Fork	RockShox Psylo Gold Isolator RC 15x110 29" 140mm travel 44mm offset
Shock	Lapierre Shock 185x50mm Trunnion/15x8mm
Rear derailleur	Shimano Deore Di2 6260 12s
Crankset	XLC CR-E18 160mm + XLC steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 600Wh / Kiox 300
Sprocket	Shimano Deore M6100 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Shimano M4100 4 pistons
Rotors	Shimano SM-RT64 203mm
Shiftlevers	Shimano Deore Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M32, Width: 780mm, Rise: 20mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, +/-7°, Ø: 31.8mm, L: 40mm (S,M), 50mm (L,XL)
Seatpost	XLC SP-T21, Ø: 31.6mm, travel 100mm (S), 125mm (M), 150mm (L), 170mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, Microspline
Rims	XLC WR-M39 32H, 30-622
Tires	Front : Continental Kryptotal F Enduro Soft 60-622 Rear : Continental Xynotal R Enduro Soft 60-622
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible

Non-binding illustrations.

Techzone

OVERVOLT TR




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

OVERVOLT TR

Travel
140mm

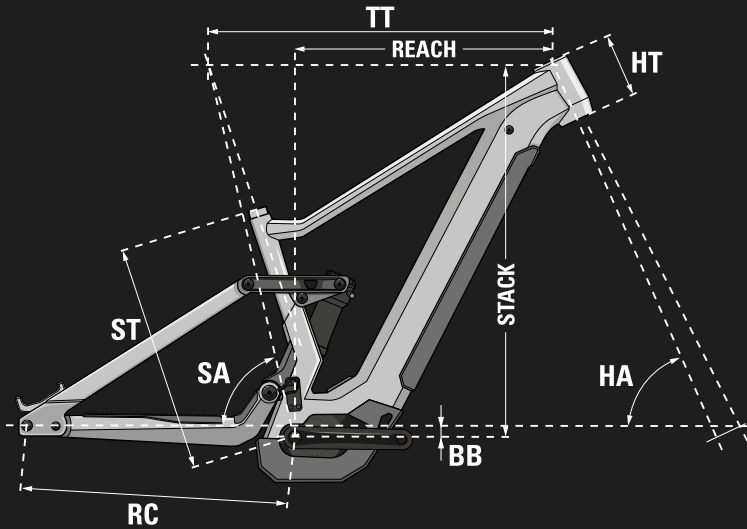

Size	S	M	L	XL
ST (mm)	390	430	460	490
Horizontal TT (mm)	583	606	630	660
HA (°)	65	65	65	65
Virtual SA (°)	76	76	76	76
RC (mm)	460	460	460	460
HT (mm)	110	120	140	160
Rear BB Drop (mm)	-24	-24	-25	-25
Front BB Drop (mm)	-25	-24	-25	-25
Fork Travel (mm)	140	140	140	140
Fork Length (mm)	550	550	550	550
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	142	142	142	142
Calculated Stack (mm)	603	615	633	651
Calculated Reach (mm)	430	450	470	495
Calculated WB (mm)	1211	1230	1257	1291
Calculated Average BB Drop (mm)	-24	-24	-25	-25
Calculated DT (mm)	741	762	788	818
Front wheel diameter (mm)	720	720	720	720
Rear wheel diameter (mm)	720	720	720	720
BB height (mm)	336	336	336	335
User	160-175	170-185	180-190	>185
Ref.	LOL__390	LOL__430	LOL__460	LOL__490

Overvolt AM AL

RANGE

EN Tackle the toughest routes with an extra pedal boost, so you can concentrate on enjoying the scenery. Redefine your limits and get out there.

DE Meistere selbst die härtesten Strecken mit elektrischer Unterstützung – damit du dich ganz auf das Erlebnis und die Landschaft konzentrieren kannst. Verschiebe deine Grenzen und entdecke, was wirklich möglich ist.



The Overvolt AM AL,
more than just an allmountain eMTB:

- The “king of the mountain”: expresses your riding in all slopes
- Aggressive setup (motorization and travel) allowing engagement at every moment
- Mullet design wheels favoring fluidity in handling

Das Overvolt AM AL,
mehr als nur ein All-Mountain-E-MTB:

- Der „King of the Mountain“ – entfaltet sein volles Potenzial in jedem Gelände
- Aggressives Setup aus Motorisierung und Federweg
- Mullet-Laufräder für leichtes, präzises Handling



ON

Overvolt AM AL 5.8

Silent Green | LOOTA
Bosch GEN 5 CX | 800 Wh



MAINT

Overvolt AM AL 7.8

Circular Grey | LOPUA
Bosch GEN 5 CX | 800 Wh



MAINT

Overvolt AM AL 9.8

Anthra Grey | LOQUA
Bosch GEN 5 CX | 800 Wh

Overvolt AM AL 5.8

SILENT GREEN

Ref. LOOTA



Overvolt AM AL 7.8

CIRCULAR GREY

Ref. LOPUA



Frame	Suprême 5 alloy
Fork	RockShox Domain Gold Isolator R 15x110 29"170mm travel 44mm offset
Shock	Lapierre Shock 205x60mm Trunnion/30x8mm
Rear derailleur	Shimano CUES U6000 11s
Crankset	E13 Helix Core 160mm + E13 Helix Core steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Kiox 300
Sprocket	Shimano CUES LG400 11-50T 11s
Chain	Shimano CUES LG500 9/10/11s
Brakes	Shimano M4100 4 pistons
Rotors	Shimano SM-RT30 203mm centerlock
Shiftlevers	Shimano CUES U6000 11s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	Lapierre Thirty Five Alloy 6061 DB, Width: 800mm, Rise: 30mm, Backsweep: 8°, Upsweep: 6°, Ø: 35mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre Thirty Five alloy 0°, Ø: 35mm, L: 35mm (S,M), 45mm (L,XL)
Seatpost	Lapierre dropper by JD YSP18, Ø: 31.6mm, travel 100mm (S), 130mm (M), 150mm (L), 170mm (XL) + Shimano lever
Saddle	Selle Royal Vivo Men
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, HG driver
Rims	Ryde Disc30 32H, 30-622 Black Anod. front / Disc35 32H, 35-684 Black Anod. Rear
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 60-584
Pedals	XLC by VP
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves Connect module + range extender compatible

Frame	Overvolt Alloy
Fork	RockShox ZEB Select Charger RC 15x110 29" 170mm travel 44mm offset
Shock	RockShox Super Deluxe Select RT 205x60mm Trunnion/30x8mm
Rear derailleur	Shimano Deore Di2 6260 12s
Crankset	XLC CR-E18 160mm + XLC steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Kiox 300
Sprocket	Shimano Deore M6100 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Shimano Deore 4 pistons
Rotors	Shimano SM-RT64 203mm
Shiftlevers	Shimano Deore Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M34, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy, 0°, Ø: 35mm, L: 40mm
Seatpost	JD YSI60, Ø: 31.6mm, travel 100 (S) 125mm (M), 150mm (L), 170mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss H1900 Spline 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 65-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible

Overvolt AM AL 9.8

ANTHRA GREY

Ref. LOQUA



Non-binding illustrations.

Frame	Overvolt Alloy
Fork	Fox 38 Float Factory Grip X 15x110 29" 170mm travel 44mm offset
Shock	Fox Float X Factory 205x60mm Trunnion/30x8mm
Rear derailleur	Shimano Deore XT Di2 M8260 12s
Crankset	XLC CR-E18 160mm + XLC steel chainring 34T 55CL
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Kiox 300
Sprocket	Shimano Deore XT M8200 10-51T 12s
Chain	Shimano M8100 12s
Brakes	Shimano Deore XT 4 pistons
Rotors	Shimano RT-CL800 203mm
Shiftlevers	Shimano Deore XT Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M34, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm
Seatpost	Lapierre by JD YSI05, Ø: 31.6mm, travel 120mm (S,M), 150mm (L), 170mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss H1900 Spline 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 65-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible

Techzone

OVERVOLT AM AL




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

OVERVOLT AM AL

Travel
160mm

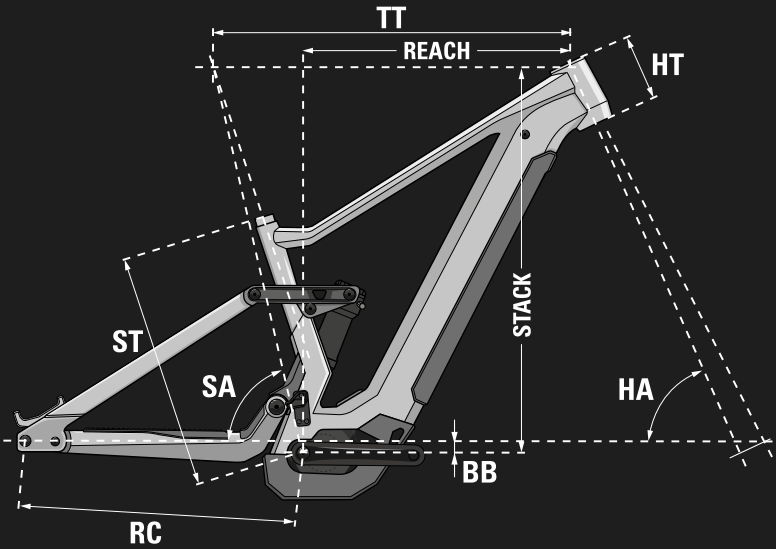

Size	S	M	L	XL
ST (mm)	390	430	460	490
Horizontal TT (mm)	586	609	633	663
HA (°)	64,5	65	65	65
Virtual SA (°)	76,5	76,5	76,5	76,5
RC (mm)	460	460	460	460
HT (mm)	110	110	130	150
Rear BB Drop (mm)	-15	-15	-15	-15
Front BB Drop (mm)	-30	-30	-30	-30
Fork Travel (mm)	170	170	170	170
Fork Length (mm)	585	585	585	585
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	160	160	160	160
Calculated Stack (mm)	638	641	659	678
Calculated Reach (mm)	433	455	475	500
Calculated WB (mm)	1231	1248	1276	1311
Calculated Average BB Drop (mm)	-21	-21	-20	-20
Calculated DT (mm)	771	786	813	842
Front wheel diameter (mm)	720	720	720	720
Rear wheel diameter (mm)	690	690	690	690
BB height (mm)	330	330	330	330
User	160-175	170-185	180-190	>185
Ref.	LO__A390	LO__A430	LO__A460	LO__A490

Overvolt AM CF

RANGE

EN The best of the GLP III and Overvolt AM combination. A powerful, easy-to-ride new carbon All Mountain E-MTB frame that lets you have fun with your friends or challenge for the top step of the podium at every race.

DE Das Beste aus GLP III und Overvolt AM – vereint in einem neuen, kraftvollen und spielerisch zu fahrenden Carbon-All-Mountain-E-MTB. Ob mit Freund:innen oder gegen die Zeit auf der Jagd nach dem Podium: Dieses Bike ist bereit.



The Overvolt AM CF,
much more than an eBike :

- Full carbon UD SLI TEAM frame
- Approved race winning kinematics
- Mullet, or full 29" compatible

Das Overvolt AM CF,
weit mehr als nur ein E-Bike:

- Vollcarbonrahmen in der UD SLI TEAM Variante
- Rennerprobte Kinematik mit Siegergenen
- Flexibles Setup: Mullet oder full 29"



NEW

Overvolt AM CF 6.8

Deep Emerald Green | LORUA
Bosch Gen 5 CX | 800 Wh



NEW

Overvolt AM CF 7.8

Tidal Teal Blue | LOSUA
Bosch Gen 5 CX | 800 Wh



NEW

Overvolt AM CF 10.8

Paris Stone Beige | LOTUA
Bosch Gen 5 CX-R | 800 Wh

Overvolt AM CF 6.8

DEEP EMERALD GREEN

Ref. LORUA



Frame	Overvolt AM Carbon
Fork	RockShox ZEB Base Rush RC 15x110 29"170mm travel 44mm offset
Shock	RockShox Deluxe Select + 205x60mm Trunnion/15x8mm
Rear derailleur	SRAM Eagle 90 T-TYPE 12s
Crankset	SRAM Eagle 90 160mm + CR XX 34T
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Mini Remote
Sprocket	SRAM XS1270 T-TYPE 10-52T 12s
Chain	SRAM Eagle 70 12s
Brakes	SRAM Maven Base 4 pistons
Rotors	SRAM Centerline 220mm/200mm 6 bolts
Shiftlevers	SRAM Eagle 90 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M34, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm
Seatpost	Lapierre by JD YSI05, Ø: 31.6mm, travel 150mm (S), 170mm (M,L,XL), + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss H1900 Spline 30mm 6 bolts HG
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 65-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible

Non-binding illustrations.

Overvolt AM CF 7.8

TIDAL TEAL BLUE

Ref. LOSUA



Frame	Overvolt AM Carbon
Fork	RockShox ZEB Select Charger RC 15x110 29"170mm travel 44mm offset
Shock	RockShox Super Deluxe RT 205x60mm Trunnion/15x8mm
Rear derailleur	SRAM GX Eagle AXS T-TYPE 12s
Crankset	SRAM S1000 160mm + CR XX 34T
System	Bosch Performance line CX, 100 Nm, 750 W / Powertube Horizontal 800Wh / Mini Remote
Sprocket	SRAM XS1275 T-TYPE 10-52T 12s
Chain	SRAM GX Eagle 12s
Brakes	SRAM Maven Bronze 4 pistons
Rotors	SRAM Centerline 220mm/200mm 6 bolts
Shiftlevers	SRAM Pod AXS 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M34, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm
Seatpost	Lapierre by JD YSI05, Ø: 31.6mm, travel 150mm (S), 170mm (M,L,XL), + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss HX1700 Spline 30mm 6 bolts XD
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 65-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible

Non-binding illustrations.

Overvolt AM CF 10.8

PARIS STONE BEIGE

Ref. LOTUA



Frame	Overvolt AM Carbon
Fork	RockShox ZEB Select Charger 3.1 RC2 15x110 29"170mm travel 44mm offset
Shock	RockShox Super Deluxe Ultimate RC2T 205x60mm Trunnion/15x8mm
Rear derailleur	Shimano XTR Di2 M9260 12s
Crankset	XLC CR-E52 160mm + XLC CR-E40 34T
System	Bosch Performance line CX-R, 100 Nm, 750 W / Powertube Horizontal 800Wh / Mini Remote
Sprocket	Shimano Deore XT M8200 10-51T 12s
Chain	Shimano M8100 12s
Brakes	Shimano XTR 4 pistons
Rotors	Shimano RT-CL900 203mm
Shiftlevers	Shimano XTR Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	SRAM Descendant Riser Downhill, Width: 800mm, Rise: 25mm, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	SRAM Descendant, 0°, Ø: 35mm, L: 40mm
Seatpost	Lapierre by JD YSI05, Ø: 31.6mm, travel 150mm (S,M), 170mm (L), 200mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W650 Tirox 145mm
Wheelset	DT Swiss HX1501 Spline ONE 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 65-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Lapierre Thru axle and bottle opener lever + Tubeless valves + Lapierre SAG Card Adjuster Connect module + range extender compatible



Techzone

OVERVOLT AM CF



Find more details
on the Accell service portal
in Accentry.


service.accentry.com

Geometry

OVERVOLT AM CF

FLIP CHIP | 27

Travel
170mm

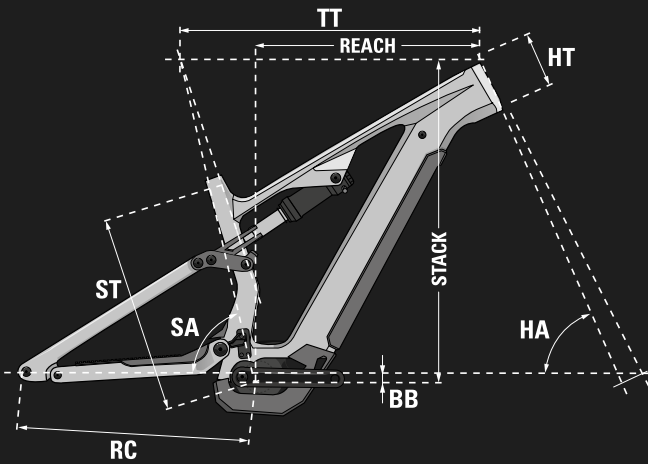


Size	S	M	L	XL
ST (mm)	390	430	460	490
Horizontal TT (mm)	583	608	630	660
HA (°)	64,5	65	65	65
Virtual SA (°)	77	77	77	77
RC (mm)	456	456	456	456
HT (mm)	100	110	125	140
Rear BB Drop (mm)	-10	-10	-10	-10
Front BB Drop (mm)	-29	-29	-29	-29
Fork Travel (mm)	170	170	170	170
Fork Length (mm)	585	585	585	585
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	170	170	170	170
Calculated Stack (mm)	628	640	654	667
Calculated Reach (mm)	438	460	479	506
Calculated WB (mm)	1228	1250	1275	1308
Calculated Average BB Drop (mm)	-17	-17	-17	-17
Calculated DT (mm)	766	789	811	838
Front wheel diameter (mm)	742	742	742	742
Rear wheel diameter (mm)	704	704	704	704
BB height (mm)	342	342	342	342
Trail (mm)	128	124	124	124
User	160-175	170-185	180-190	>185
Ref.	LO__A390	LO__A430	LO__A460	LO__A490

Geometry

OVERVOLT AM CF

FLIP CHIP | 29

Travel
170mm

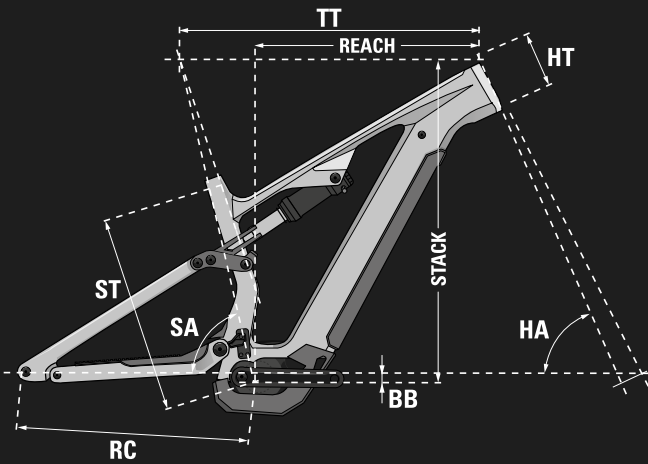

Size	S	M	L	XL
ST (mm)	390	430	460	490
Horizontal TT (mm)	583	608	630	660
HA (°)	64,5	65	65	65
Virtual SA (°)	77	77	77	77
RC (mm)	459	459	459	459
HT (mm)	100	110	125	140
Rear BB Drop (mm)	-29	-29	-29	-29
Front BB Drop (mm)	-29	-29	-29	-29
Fork Travel (mm)	170	170	170	170
Fork Length (mm)	585	585	585	585
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	170	170	170	170
Calculated Stack (mm)	628	640	654	667
Calculated Reach (mm)	438	460	479	506
Calculated WB (mm)	1231	1252	1277	1310
Calculated Average BB Drop (mm)	-29	-29	-29	-29
Calculated DT (mm)	766	789	811	838
Front wheel diameter (mm)	742	742	742	742
Rear wheel diameter (mm)	742	742	742	742
BB height (mm)	342	342	342	342
Trail (mm)	128	124	124	124
User	160-175	170-185	180-190	>185
Ref.	LO__A390	LO__A430	LO__A460	LO__A490

RANGE MY26

Mountain Bikes

EN Every mountain bike we design is infused with the racing DNA of our elite enduro and XC teams, built to make you feel the thrill of top-level performance.

DE Jedes unserer Mountainbikes trägt das Racing-Gen unserer Enduro- und XC-Profiteams in sich – gebaut, um dir den Nervenkitzel echter Wettkampf-Performance zu liefern.



	XS	S	M	L	XL	XXL
Prorace Kids	UNI					
Prorace	-	150-163	160-170	167-178	176-186	-
Prorace CF	-	150-170	168-178	176-186	>184	-
XRM	-	150-170	168-178	176-186	>184	-
Zesty TR	145-155	150-170	168-178	176-186	>184	-
Zesty CF	-	150-170	168-178	176-186	>184	-
Spicy CF	152-164	163-172	170-182	180-190	>188	-

Mountain Bikes

RANGE OVERVIEW



Prorace Kids

RANGE

EN Let your kids enjoy the ride!

DE Fahrspaß für die Kleinen – vom ersten Moment an!



The Prorace Kid,
more than just a kids' bike:

- Colors that will delight the little ones
- Reliable and safe components
- 20 to 24-inch wheels for all sizes

Das Prorace Kid,
mehr als nur ein Kinderfahrrad:

- Farben, die Kinderaugen leuchten lassen
- Zuverlässige und sichere Komponenten
- 20- bis 24-Zoll-Laufräder –
passend für jede Größe



Prorace 20 SL
Crimson Red | LPAUC



Prorace 20 SL
Sage Leaf Green | LPAUD



Prorace 24 SL
Glowing Green | LPBUC



Prorace 24 SL
Elemental Blue | LPBUD

Non-binding illustrations.

Prorace 20 SL

CRIMSON RED

Ref. LPAUC



Frame	Prorace 20" Alloy V-Brake
Fork	Alloy Rigid 20"
Rear derailleur	Shimano Acera 7/8s
Crankset	XLC Alloy 28T 114mm
Bottom bracket	SA Cartridge type 122.5mm
Sprocket	Shimano CS-HG31 11-34T 8s
Chain	KMC Z8 8s
Brakes	Tektro C310
Shiftlevers	Shimano M315 8s
Headset	FSA NO.10 semi-integrated
Handlebar	XLC alloy 6061, Width: 540, Rise : 25mm, Backsweep: 7°, Ø: 31.8mm
Grips	VeloVLG-2061D2 115mm lock-On
Stem	TDS-C308-8/ISO-M, Ø: 28.6, L:40mm, R:10°
Seatpost	XLC Alloy SP-DC1, Ø: 27.2mm, L: 250mm
Saddle	XLC by DDK D992
Front hub	KT A15F
Rear Hub	KT KT-AZER HG 20H
Rims	Alloy 406x23mm double wall 20H CNC
Tires	Kenda Booster 20x2.2"
Pedals	VP-225

Prorace 20 SL

SAGE LEAG GREEN

Ref. LPAUD



Frame	Prorace 20" Alloy V-Brake
Fork	Alloy Rigid 20"
Rear derailleur	Shimano Acera 7/8s
Crankset	XLC Alloy 28T 114mm
Bottom bracket	SA Cartridge type 122.5mm
Sprocket	Shimano CS-HG31 11-34T 8s
Chain	KMC Z8 8s
Brakes	Tektro C310
Shiftlevers	Shimano M315 8s
Headset	FSA NO.10 semi-integrated
Handlebar	XLC alloy 6061, Width: 540, Rise : 25mm, Backsweep: 7°, Ø: 31.8mm
Grips	VeloVLG-2061D2 115mm lock-On
Stem	TDS-C308-8/ISO-M, Ø: 28.6, L:40mm, R:10°
Seatpost	XLC Alloy SP-DC1, Ø: 27.2mm, L: 250mm
Saddle	XLC by DDK D992
Front hub	KT A15F
Rear Hub	KT KT-AZER HG 20H
Rims	Alloy 406x23mm double wall 20H CNC
Tires	Kenda Booster 20x2.2"
Pedals	VP-225

Non-binding illustrations.

Prorace 24 SL

GLOWING GREEN

Ref. LPBUC



Prorace 24 SL

ELEMENTAL BLUE

Ref. LPBUD



Frame	Prorace 24" Alloy V-Brake
Fork	Alloy Rigid 24"
Rear derailleur	Shimano Acera 7/8s
Crankset	XLC Alloy 32T 140mm
Bottom bracket	BSA Cartridge type 122.5mm
Sprocket	Shimano CS-HG31 11-34T 8s
Chain	KMC Z8 8s
Brakes	Tektro C310
Shiftlevers	Shimano M315 8s
Headset	FSA NO.10 semi-integrated
Handlebar	XLC alloy 6061, Width: 540, Rise : 25mm, Backsweep: 7°, Ø: 31.8mm
Grips	VeloVLG-2061D2 115mm lock-On
Stem	TDS-C308-8/ISO-M, Ø: 28.6, L:40mm, R:10°
Seatpost	XLC Alloy SP-DC1, Ø: 27.2mm, L: 250mm
Saddle	XLC by DDK D992
Front hub	KT A15F
Rear Hub	KT KT-AZER HG 20H
Rims	Alloy 507x25mm double wall 20H CNC
Tires	Kenda Booster 24x2.2"
Pedals	VP-225

Frame	Prorace 24" Alloy V-Brake
Fork	Alloy Rigid 24"
Rear derailleur	Shimano Acera 7/8s
Crankset	XLC Alloy 32T 140mm
Bottom bracket	BSA Cartridge type 122.5mm
Sprocket	Shimano CS-HG31 11-34T 8s
Chain	KMC Z8 8s
Brakes	Tektro C310
Shiftlevers	Shimano M315 8s
Headset	FSA NO.10 semi-integrated
Handlebar	XLC alloy 6061, Width: 540, Rise : 25mm, Backsweep: 7°, Ø: 31.8mm
Grips	VeloVLG-2061D2 115mm lock-On
Stem	TDS-C308-8/ISO-M, Ø: 28.6, L:40mm, R:10°
Seatpost	XLC Alloy SP-DC1, Ø: 27.2mm, L: 250mm
Saddle	XLC by DDK D992
Front hub	KT A15F
Rear Hub	KT KT-AZER HG 20H
Rims	Alloy 507x25mm double wall 20H CNC
Tires	Kenda Booster 24x2.2"
Pedals	VP-225

Techzone

PRORACE KIDS




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry


PRORACE 20 SL

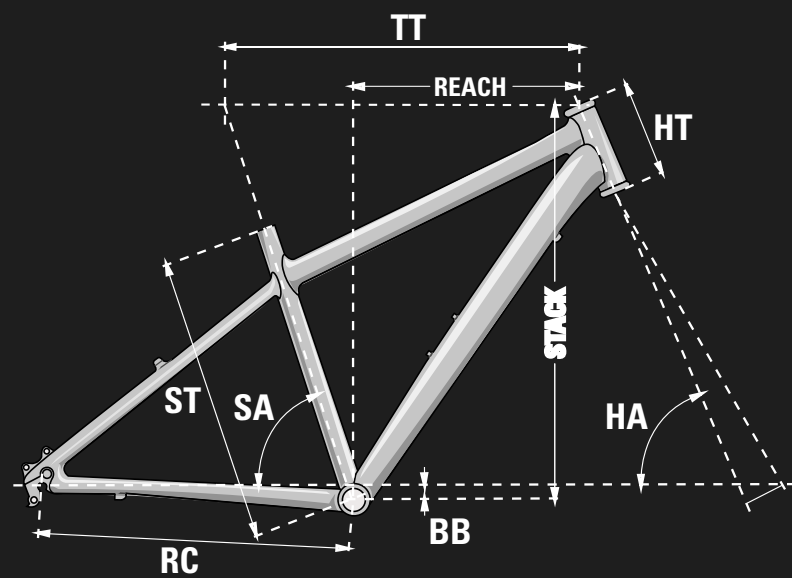

SIZE	UNI
ST (MM)	250
TT (MM)	440
HA (°)	71
SA (°)	72
RC (MM)	366
HT (MM)	100
BB (MM)	-20
REACH	305
STACK	416
USER	115-135
REF.	LP_P_250

Geometry

PRORACE 24 SL

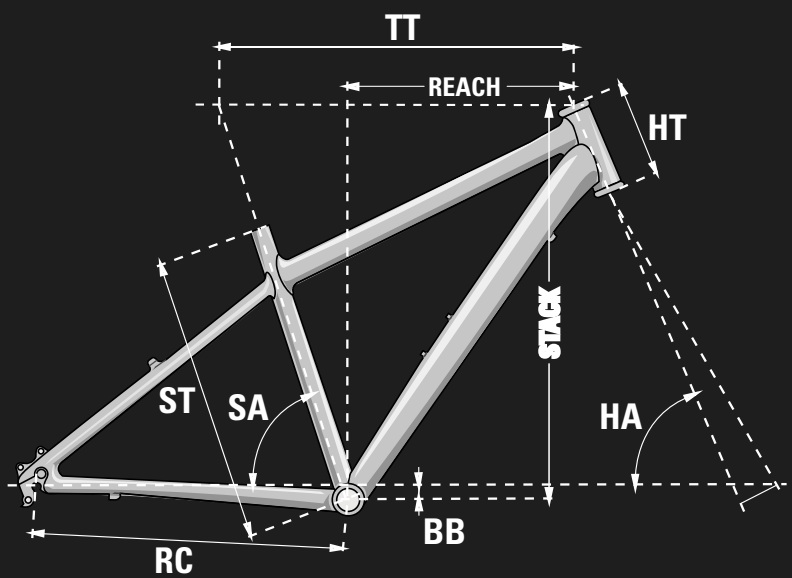

SIZE	UNI
ST (MM)	300
TT (MM)	486
HA (°)	70
SA (°)	73
RC (MM)	405
HT (MM)	100
BB (MM)	-35
REACH	333
STACK	499
USER	130-155
REF.	LP_P_300

Prorace

RANGE

EN A true companion to push the limits. With the Prorace, wake up the competitor within you.

DE Dein Begleiter, der dich weiterbringt. Mit dem Prorace weckst du den Wettkampfgeist in dir.



The Prorace,
more than just an XC bike:

- Fluid and sleek semi-rigid design
- The market reference for aluminum XC MTB
- A game-changer for starting competition

Das Prorace,
mehr als nur ein XC-Bike:

- Dynamisches, schlankes Design
- Die Referenz unter den Aluminium-XC-Mountainbikes
- Dein Einstieg in die Welt des Rennsports



MAINT

Prorace 1.9

Midnight Blue
LPAUA



MAINT

Prorace 2.9

Circular Grey
LPBUA



MAINT

Prorace 3.9

Sage Leaf Green
LPCUA



MAINT

Prorace 4.9

Tidal Teal Blue
LPDUA

Prorace 1.9

MIDNIGHT BLUE

Ref. LPAUA



Prorace 2.9

CIRCULAR GREY

Ref. LPBUA



Frame	Prorace Alloy
Fork	Suntour SF 18 XCE28 QR 29"100mm travel
Rear derailleur	Shimano CUES U4000 9s
Crankset	Shimano CUES U4000 9/10/11s 170mm 32T
Bottom bracket	Shimano BB-UN101 Square type BSA
Sprocket	Shimano CUES LG300 11-41T 9s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Tektro TR160-35 160mm
Shiftlevers	Shimano CUES U4000 9s
Headset	FSA Semi-Integrated
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm
Seatpost	XLC by JD SP66, Ø: 30.9mm, 400mm (S,M,L), 450mm (XL)
Saddle	XLC SA –S10 Sport Steel Rail 143mm
Front hub	XLC HF-T20 QR 32H Centerlock
Rear hub	XLC HR-T20 QR 32H Centerlock HG
Rims	XLC WR-T29 32H, 23-622
Tires	XLC Summit 57-622
Pedals	XLC by VP PD-C35

Frame	Prorace Alloy
Fork	RockShox Judy TK Coil QR 29"100mm travel 51mm offset
Rear derailleur	Shimano CUES U6000 10/11s
Crankset	Shimano CUES U4000 9/10/11s 170mm 32T
Bottom bracket	Shimano BB-UN101 Square type BSA
Sprocket	Shimano CUES LG300 11-48T 10s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Tektro TR160-35 160mm
Shiftlevers	Shimano CUES U6000 10s
Headset	FSA Semi-Integrated
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm
Seatpost	XLC by JD SP66, Ø: 30.9mm, 400mm (S,M,L), 450mm (XL)
Saddle	XLC SA –S10 Sport Steel Rail 143mm
Front hub	XLC HF-T20 QR 32H Centerlock
Rear hub	XLC HR-T20 QR 32H Centerlock HG
Rims	XLC WR-T29 32H, 23-622
Tires	XLC Summit 57-622
Pedals	XLC by VP PD-C35

Prorace 3.9

SAGE LEAF GREEN

Ref. LPCUA



Prorace 4.9

TIDAL TEAL BLUE

Ref. LPDUA




Frame	Prorace Alloy
Fork	RockShox Judy Silver TK Solo Air 15x110 29"100mm travel 51mm offset
Rear derailleur	Shimano Deore 6100 12s
Crankset	Shimano MT512 32T 170mm(S,M), 175mm (L,XL)
Bottom bracket	Shimano BB-MT800 Pressfit
Sprocket	Shimano Deore M6100 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Tektro HD-M280
Rotors	Tektro TR180-35 180mm/160mm
Shiftlevers	Shimano Deore 12s
Headset	FSA ORBIT 1.5ZS SC NO.57SC
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 400mm
Saddle	XLC SA -S10 Sport Steel Rail 143mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M19 32H, 25-622
Tires	XLC Summit 57-622
Pedals	XLC by VP PD-C35

Frame	Prorace Alloy
Fork	RockShox Judy Gold RL Remote Solo Air 15x110 29"100mm travel 51mm offset
Rear derailleur	SRAM SX Eagle 12s
Crankset	SRAM SX Eagle DUB 32T 170mm(S), 175mm (M,L,XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM PG 1210 11-50T 12s
Chain	SRAM SX Eagle 12s
Brakes	Tektro HD-M280
Rotors	Tektro TR180-35 180mm/160mm
Shiftlevers	SRAM SX Eagle 12s
Headset	FSA ORBIT 1.5ZS SC NO.57SC
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 400mm
Saddle	XLC SA -S10 Sport Steel Rail 143mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M19 32H, 25-622
Tires	XLC Summit 57-622
Pedals	XLC by VP PD-C35

Techzone

PRORACE




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry


PRORACE 1.9
PRORACE 2.9

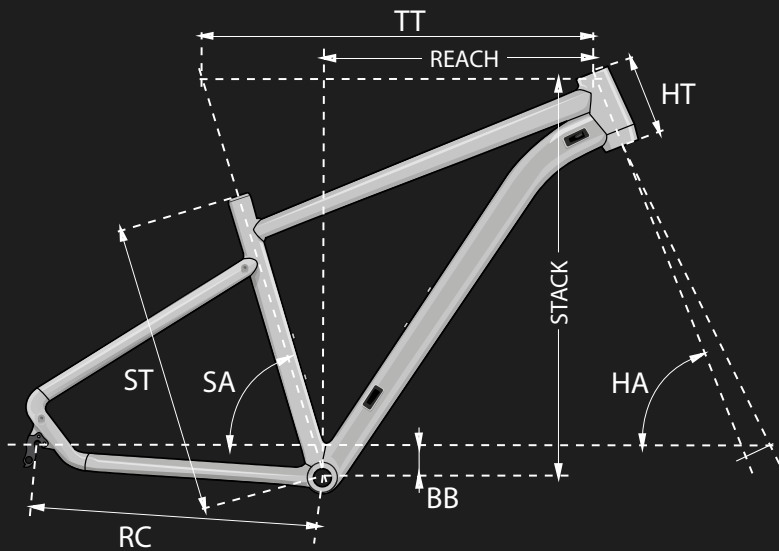

Size	S	M	L	XL
ST (MM)	400	440	480	520
TT (MM)	575	595	615	635
HA (°)	68	68	68	68
SA (°)	73.5	73.5	73.5	73.5
RC (MM)	450	450	450	450
HT (MM)	105	115	125	135
BB (MM)	-60	-60	-60	-60
REACH	391	408	425	443
STACK	620	629	639	648
User	150-163	160-170	168-178	176-186
Ref.	LP_UA400	LP_UA440	LP_UA480	LP_UA520

Geometry

PRORACE 3.9
PRORACE 4.9

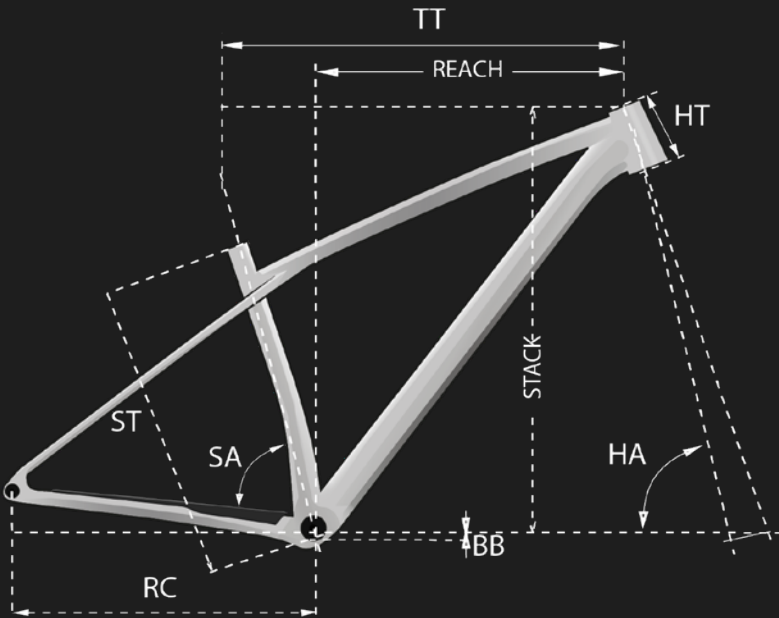

Size	S	M	L	XL
ST (MM)	390	430	470	510
TT (MM)	550	575	600	625
HA (°)	69	69.5	69.5	69.5
SA (°)	73	73	73	73
RC (MM)	428	428	428	428
HT (MM)	90	90	90	105
BB (MM)	-65	-65	-60	-60
REACH	371	390	416	437
STACK	584	605	600	614
User	150-163	160-170	168-178	176-186
Ref.	LP_UA390	LP_UA430	LP_UA470	LP_UA510

Prorace CF

RANGE

EN It provides rigidity when picking up the pace again and steering accuracy; the Prorace CF could let you gain precious minutes on your favourite routes.

DE Liefert dir den Vortrieb und die Präzision, um deine Pace zu halten – mit dem Prorace CF sparst du wertvolle Minuten auf deinen Lieblingsstrecken.



The Prorace CF,
more than just a carbon XC bike:

- A bike for experienced mountain bikers
- Variety of colors for a variety of styles
- An ideal semi-rigid for speed and rolling ground

Das Prorace CF,
mehr als nur ein Carbon-XC Bike:

- Ein Bike für erfahrene Mountainbiker:innen
- Verschiedene Farben für individuellen Style
- Der ideale Rahmen für Tempo und Laufruhe



Prorace CF 5.9

Black
LPFUA



Prorace CF 6.9

Midnight Plum Purple
LPGUA



Prorace CF 7.9

Graphite Grey
LPHUA

Prorace CF 5.9

BLACK

Ref. LPFUA



Prorace CF 6.9

MIDNIGHT PLUM PURPLE

Ref. LPGUA



Frame	Prorace Carbon
Fork	RockShox Judy Silver TK Remote 15x110 29"100mm travel 42mm offset
Rear derailleur	Shimano Deore 6100 12s
Crankset	Shimano MT512 32T 170mm(S,M), 175mm (L,XL)
Bottom bracket	Shimano BB-MT800 Pressfit
Sprocket	Shimano Deore M6100 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Tektro HD-M280
Rotors	Tektro TR180-35 180mm/160mm
Shiftlevers	Shimano Deore 12s
Headset	FSA IS-2/42/ACB
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 400mm
Saddle	XLC SA –S10 Sport Steel Rail 143mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M19 32H, 25-622
Tires	Front : SCHWALBE RACING RALPH Perf 57-622 ADDIX 67EPI Rear : SCHWALBE RACING RAY Perf 57-622 ADDIX 67EPI
Pedals	XLC by VP PD-C35
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Frame	Prorace Carbon
Fork	RockShox Reba RL Motion Control Remote 15x110 29"100mm travel 44mm offset
Rear derailleur	SRAM Eagle 70 T-TYPE 12s
Crankset	SRAM Eagle 70 DUB 32T 170mm(S,M), 175mm (L,XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM PG 1270 10-52T 12s
Chain	SRAM Eagle 70 T-TYPE 12s
Brakes	Tektro HD-H280
Rotors	Tektro TR180-35 180mm/160mm
Shiftlevers	SRAM Eagle 70 12s
Headset	FSA IS-2/42/ACB
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 400mm
Saddle	XLC SA –S10 Sport Steel Rail 143mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M19 32H, 25-622
Tires	Front : SCHWALBE RACING RALPH Perf 57-622 ADDIX 67EPI Rear : SCHWALBE RACING RAY Perf 57-622 ADDIX 67EPI
Pedals	XLC by VP PD-C35
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Prorace CF 7.9

GRAPHITE GREY

Ref. LPHUA



Non-binding illustrations.

Frame	Prorace Carbon
Fork	RockShox SID SL Select 2-pos Remote 15x110 29"100mm travel 44mm offset
Rear derailleur	Shimano Deore Di2 M6250 12s
Crankset	Shimano MT612 32T 170mm(S,M), 175mm (L,XL)
Bottom bracket	Shimano BB-MT800 Pressfit
Sprocket	Shimano Deore M6100 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Shimano Deore 2 pistons
Rotors	Shimano RT-CL700 180/160mm centerlock
Shiftlevers	Shimano Deore Di2 12s
Headset	FSA IS-2/42/ACB
Handlebar	XLC Alloy HB-M30, Width: 760mm, Rise: 0mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC Sport grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 400mm
Saddle	XLC SA –S10 Sport Steel Rail 143mm
Wheelset	DT Swiss X1900 Spline 25mm Centerlock HG
Tires	Front : Continental Trinotal Trail Grip 55-622 Rear : Continental Dubnital Trail Rapid 55-622
Pedals	XLC by VP PD-C35
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Techzone

PRORACE CF




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

PRORACE CF

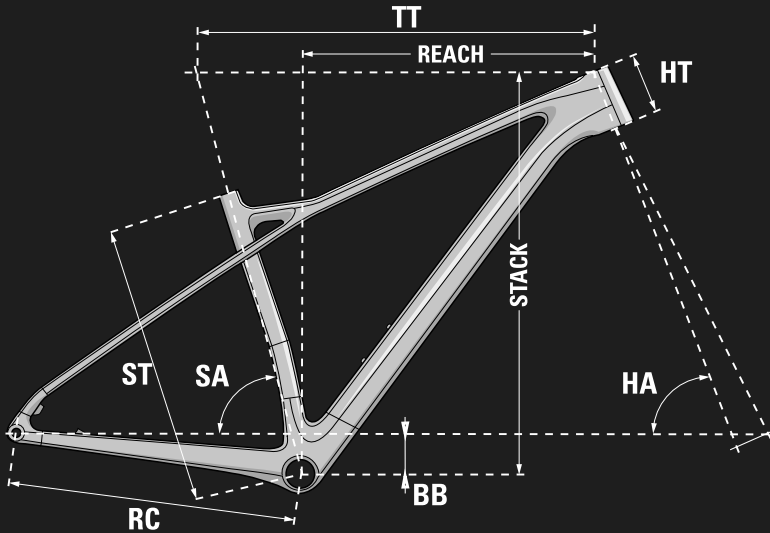

Size	S	M	L	XL
ST (MM)	390	430	470	510
TT (MM)	581	606	629	657
HA (°)	68	68	68	68
SA (°)	74	74	74	74
RC (MM)	420	420	420	420
HT (MM)	85	90	100	110
BB (MM)	-67	-62	-62	-62
FRK TRAVEL	100	100	100	100
FRK LENGTH	505	505	505	505
FRK OFFSET	44	44	44	44
STACK	598	597	606	616
REACH	410	435	455	480
WB	1086	1114	1138	1167
User	150-170	168-178	176-186	>184
Ref.	LP___390	LP___430	LP___470	LP___510

XRM

RANGE

EN The ability to perform at the highest levels of competition.

DE Bereit, im Wettkampf alles zu geben.



The XRM,
more than just an endurance XC bike:

- A kinematics designed for long-distance
- Carbon frame and travel made for maximum comfort
- Responsive 29-inch wheels

Das XRM,
mehr als nur ein Endurance-XC Bike:

- Speziell entwickelte Kinematik für lange Distanzen
- Carbonrahmen und Dämpfung liefern Komfort und Leistung
- Reaktionsfreudige 29-Zoll-Laufräder



ON

XRM 6.9

Ocher
LRERA



ON

XRM 7.9

Cherry Red
LRBRB



ON

XRM 8.9

Translucent Blue
LRFRA



ON

XRM 9.9

Vapor Green
LRITA



ON

XRM 10.9

Translucent Carmin
LRHTA

Non-binding illustrations.

XRM 6.9

OCHER

Ref. LRERA



Frame	XR full Carbon 110mm travel 29", pressfit, boost, metric, Thru axle
Fork	Fox 34 Float SC Performance 29" 15x110, 120mm travel, Grip, Push-Lock, 44mm offset + FOX 2-pos Remote
Shock	Fox Float Performance Elite, 2-Pos Remote, LV Evol, 210x55mm
Rear derailleur	Shimano Deore XT 12s Shadow +
Crankset	Shimano MT612 32T 170mm (S), 175mm (M, L, XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	Shimano Deore 10-51T 12s
Chain	Shimano Deore 12s
Brakes	Shimano M4100 2 pistons
Rotors	Shimano MT64 180mm/160mm Centerlock
Shiftlevers	Shimano SLX 12s Rapidfire
Headset	FSA Integrated 1.5ZS IS-2 /42/ACB hidden set
Handlebar	Lapierre Thirty One 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm
Grips	Lapierre grips anodized, S/M: small diameter, L/XL: large diameter
Stem	Lapierre AL6061 alloy, -6°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	Lapierre dropper, Ø: 31.6mm, travel 100mm (S,M), 130mm (L,XL)
Saddle	Fizik Argo Vento X 140mm
Front hub	Shimano TC500, boost 15x110, 32H Centerlock
Rear hub	Shimano TC500, boost 12x148, 32H Centerlock, Microspline
Rims	Mavic XC 425 DISC 25x622, 32H Black Anod.
Tires	Front : Maxxis Ardent Race EXO TR 29x2.35 60 TPI Rear : Maxxis Rekon Race EXO TR 29x2.35 60 TPI
Pedals	NW 91K Steel cage
Accessories	Thru axle Bottle opener lever + Tubeless valves

XRM 7.9

OLIVE GREEN

Ref. LRBRA



Frame	XR full Carbon 110mm travel 29", pressfit, boost, metric, Thru axle
Fork	Fox 34 Float SC Performance 29" 15x110, 120mm travel, Grip, Push-Lock, 44mm offset + FOX 2-pos Remote
Shock	Fox Float Performance Elite, 2-Pos Remote, LV Evol, 210x55mm
Rear derailleur	SRAM X01 Eagle, 12s
Crankset	SRAM GX Eagle Boost DUB Lunar 32T 170mm (S) , 175mm (M, L, XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XG 1275 10-52T 12s
Chain	SRAM NX Eagle 12s
Brakes	SRAM LEVEL TL Gloss Black 2 pistons
Rotors	SRAM Centerline 180mm/160mm 6 bolts
Shiftlevers	SRAM GX Eagle Lunar 12s
Headset	FSA Integrated 1.5ZS IS-2 /42/ACB hidden set
Handlebar	Lapierre Thirty One 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm
Grips	Lapierre grips anodized, S/M: small diameter, L/XL: large diameter
Stem	Lapierre AL6061 alloy, -6°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	Lapierre dropper, Ø: 31.6mm, travel 100mm (S,M), 130mm (L,XL)
Saddle	Fizik Argo Vento X 140mm
Wheelset	DT Swiss EX1900 SPLINE® 622x25c, SRAM XD Driver, 6 bolt
Tires	Front : Maxxis Ardent Race EXO TR 29x2.35 60 TPI Rear : Maxxis Rekon Race EXO TR 29x2.35 60 TPI
Pedals	NW 91K Steel cage
Accessories	Thru axle Bottle opener lever + Tubeless valves

Non-binding illustrations.

Non-binding illustrations.

XRM 8.9

TRANSLUCENT BLUE

Ref. LRFRA



Frame	XR full Carbon 110mm travel 29" Team Layup, pressfit, boost, metric, Thru axle
Fork	Fox 34 Float SC Factory 29" 15x110, 120mm travel, FIT4, Push-Lock, 44mm offset + FOX 2-pos Remote
Shock	Fox Float Factory, 2-Pos Remote, LV Evol, 210x55mm
Rear derailleur	Shimano XTR 12s Shadow +
Crankset	RACE FACE NEXT SL 32T 170mm (S), 175mm (M, L, XL)
Bottom bracket	RACE FACE BB 92, Double Row, Ext. Seal
Sprocket	Shimano Deore XT 10-51T 12s
Chain	Shimano Deore XT 12s
Brakes	Shimano XTR 2pistons
Rotors	Shimano MT800 180mm/160mm Centerlock
Shiftlevers	Shimano XTR 12s Rapidfire
Headset	FSA Integrated 1.5ZS IS-2 /42/ACB hidden set
Handlebar	RACE FACE NEXT SL, Width: 740mm, Rise: 10mm, Ø: 35mm
Grips	Lapierre grips anodized, S/M: small diameter, L/XL: large diameter
Stem	RACE FACE TURBINE R, 0°, Ø: 35mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	FOX Transfer SL, Ø: 31.6mm, travel 100mm (S,M), 125mm (L,XL)
Saddle	Fizik Argo Vento X 140mm
Wheelset	DT Swiss XRC 1200 SPLINE® 622x30c, Shimano 12s light Driver, Centerlock
Tires	Front : Maxxis Ardent Race 3C MaxxSpeed EXO TR 29x2.35 120 TPI Rear : Maxxis Rekon Race 3C MaxxTerra EXO TR 29x2.35 120 TPI
Pedals	NW 91K Steel cage
Accessories	Thru axle Bottle opener lever + Tubeless valves

XRM 9.9

VAPOR GREEN

Ref. LRITA



Frame	Carbon UD SLI
Fork	Fox 34 Float SC Factory GRIP SL Remote 2Pos 15x110 29"120mm travel 44mm offset
Shock	Fox Float Factory Remote 2pos 210x55mm 25x8mm/15x8mm
Rear derailleur	SRAM GX EAGLE AXS T-TYPE 12s
Crankset	SRAM GX EAGLE T-TYPE DUB 34T 170mm (S) , 175mm (M, L, XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XS1275 T-TYPE 10-52T 12s
Chain	SRAM GX T-TYPE 12s
Brakes	SRAM Level Bronze Stealth 2 pistons
Rotors	SRAM Centerline X 180mm/160mm 6 bolts
Shiftlevers	SRAM AXS Pod 12s
Headset	FSA Integrated 1.5ZS IS-2 /42/ACB hidden set
Handlebar	RACE FACE TURBINE, Width: 760mm, Rise: 1/2", Ø: 31.8mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	Lapierre Alloy 7050, -6°, Ø: 31.8mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	Lapierre by Limotec A1 Light Zedler, Ø: 31.6mm, travel 100mm (S,M), 125mm (L,XL)
Saddle	Fizik Argo Vento X 140mm
Wheelset	Lapierre XC SL carbon
Tires	Front : Maxxis Ardent Race 3C Maxxspeed EXO TR 29x2.35 Rear : Maxxis Rekon Race ExoTR 29x2.35 120TPI
Pedals	XLC by VP
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Non-binding illustrations.

XRM 10.9

TRANSLUCENT CARMIN

Ref. LRHTA



Non-binding illustrations.

Frame	Carbon UD SLI Team
Fork	Fox 34 Float SC Factory GRIP SL Remote 2Pos 15x110 29"120mm travel 44mm offset
Shock	Fox Float Factory Remote 2pos 210x55mm 25x8mm/15x8mm
Rear derailleur	SRAM X0 EAGLE AXS T-TYPE 12s
Crankset	SRAM X0 EAGLE T-TYPE DUB Power Meter 34T 170mm (S), 175mm (M,L,XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XS 1295 T-TYPE 10-52T 12s
Chain	SRAM X0 T-TYPE 12s
Brakes	SRAM Level Silver Stealth 2 pistons
Rotors	SRAM Centerline X 180mm/160mm 6 bolts
Shiftlevers	SRAM AXS Pod Ultimate 12s
Headset	FSA Integrated 1.5ZS IS-2 /42/ACB hidden set
Handlebar	RACE FACE NEXT SL, Width: 740mm, Rise: 10mm, Ø: 35mm
Grips	Lapierre grips, S/M: small diameter, L/XL: large diameter
Stem	RACE FACE TURBINE R, 0°, Ø: 35mm, L: 60mm (S,M), 70mm (L,XL)
Seatpost	Lapierre dropper by JD YSI16, Ø: 31.6mm, 400mm (S,M), 450mm (L,XL), travel 100mm
Saddle	Fizik Argo Vento X 140mm
Wheelset	Lapierre XC SL carbon
Tires	Front : Maxxis Ardent Race 3C Maxxspeed EXO TR 29x2.35 Rear : Maxxis Rekon Race ExoTR 29x2.35 120TPI
Pedals	XLC by VP
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Techzone

XRM




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

XRM

Travel
110mm

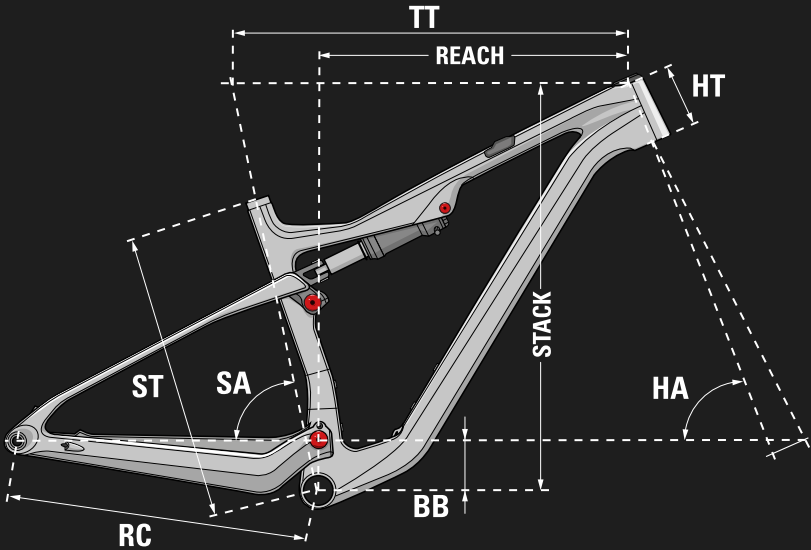

Size	S	M	L	XL
ST (MM)	390	430	470	510
TT (MM)	575	602	624	651
HA (°)	66	66	66	66
SA (°)	74.5	74.5	74.5	74.5
RC (MM)	435	435	435	435
HT (MM)	85	90	100	110
BB (MM)	-40	-40	-40	-40
FRK TRAVEL	120	120	120	120
FRK LENGTH	531	531	531	531
FRK OFFSET	44	44	44	44
STACK	584	589	598	608
REACH	415	440	460	485
WB	1134	1162	1185	1214
User	150-170	168-178	176-186	>184
Ref.	LR___390	LR___430	LR___470	LR___510

Zesty TR

RANGE

EN The perfect companion for those eager to explore the trails and embrace the thrill.

DE Der perfekte Begleiter für alle, die neue Trails entdecken wollen und den Nervenkitzel lieben.



The Zesty TR,
more than just a trail bike:

- Ideal for accelerating on singletracks and exploring the mountains
- Reliable and faithful components

Das Zesty TR,
mehr als nur ein Trail-Bike:

- Ideal für schnelle Abfahrten und effiziente Anstiege
- Zuverlässige und bewährte Komponenten



ON

Zesty TR 3.7

Green Olive
LZAPA



ON

Zesty TR 3.9

Green Olive
LZBPA



ON

Zesty TR 4.9

Corail Blue
E221



ON

Zesty TR 5.9

Red Ruby
LZDPA

Non-binding illustrations.

Zesty TR 3.7

GREEN OLIVE

Ref. LZAPA



Frame	Zesty TR Supreme 5 alloy 120mm travel (27"), pressfit, boost, metric, thru axle
Fork	Suntour Raidon 32 RLR DS 15x110 120mm 27,5"
Shock	Lapierre Shock Metric 165x45mm
Rear derailleur	Shimano Deore M5100, 11s
Crankset	Shimano Deore M5100 32T 170mm
Bottom bracket	Shimano MT800 Press Fit
Sprocket	Shimano Deore M5100 11-51T 11s
Chain	KMC X11 black/silver 11s
Brakes	Shimano MT401 2 pistons
Rotors	Shimano RT30 180mm
Shiftlevers	Shimano Deore M5100 11s
Headset	FSA Orbit Zero stack
Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm
Grips	Lapierre DD34 Lock-on
Stem	Lapierre alloy CNC, 0°, L: 35mm
Seatpost	Lapierre dropper post, Ø: 31.6mm, travel 80mm
Saddle	Selle Royal Vivo
Front hub	Shimano MT400, boost 15x110, 32H Center Lock
Rear hub	Shimano MT400, boost 12x148, 32H Center Lock
Rims	Rodi Ryot 25x584, 32H Tubeless Ready
Tires	Front: Maxxis Ardent, EXO, 27x2.40, TR Rear: Maxxis Forekaster, EXO, 27x2.35, TR
Pedals	NW-91K
Accessories	Lapierre Thru axle + Bottle opener lever + Tubeless valves

Zesty TR 3.9

GREEN OLIVE

Ref. LZBPA



Frame	Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle
Fork	Suntour Raidon 32 RLR DS 15x110 120mm 29"
Shock	Lapierre Shock Metric 165x45mm
Rear derailleur	Shimano Deore M5100, 11s
Crankset	Shimano Deore M5100 32T 170mm (S,M), 175mm (L/XL)
Bottom bracket	Shimano MT800 Press Fit
Sprocket	Shimano Deore M5100 11-51T 11s
Chain	KMC X11 black/silver 11s
Brakes	Shimano MT401 2 pistons
Rotors	Shimano RT30 180mm
Shiftlevers	Shimano Deore M5100 11s
Headset	FSA Orbit Zero stack
Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm
Grips	Lapierre DD34 Lock-on
Stem	Lapierre alloy CNC, 0°, L: 45mm (S/M), 55 (L,XL)
Seatpost	Lapierre dropper post, Ø: 31.6mm, travel 80(S), 100mm (M), 130mm (L,XL)
Saddle	Selle Royal Vivo
Front hub	Shimano MT400, boost 15x110, 32H Center Lock
Rear hub	Shimano MT400, boost 12x148, 32H Center Lock
Rims	Rodi Ryot 25x622, 32H Tubeless Ready
Tires	Front: Maxxis Ardent, EXO, 29x2.40, TR Rear: Maxxis Forekaster, EXO, 29x2.35, TR
Pedals	NW-91K
Accessories	Lapierre Thru axle + Bottle opener lever + Tubeless valves

Non-binding illustrations.

Zesty TR 4.9

CORAIL BLUE

Ref. E221



Zesty TR 5.9

RED RUBY

Ref. LZDPA



Frame	Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle
Fork	RockShox 35 Gold RL boost 130mm (29") W: remote LO
Shock	Lapierre AF2 Air Trunnion metric Rebound & Lockout (165x45mm)
Rear derailleur	SRAM GX Lunar Eagle, 12s
Crankset	SRAM NX Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M/L) / 175mm (XL)
Bottom bracket	Sram DUB Pressfit MTB 92
Sprocket	SRAM PG1210 11-50T 12s
Chain	SRAM SX Eagle 12s
Brakes	Shimano M4100 4 (front) / 2 (rear) pistons
Rotors	Shimano RT30 203mm/180mm
Shiftlevers	SRAM SX Eagle 12s
Headset	FSA Orbit Zero stack
Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore
Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
Stem	Lapierre Full CNC, 0°, L: 45mm (S/M), 50mm (L), 55mm (XL)
Seatpost	Lapierre dropper by JD, travel: 80mm (S), 100mm (M), 130mm (L,XL)
Saddle	Selle Royal Vivo
Front hub	Lapierre by Fastace DF813, boost 15x110, 32H
Rear hub	Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H
Rims	Rodi Ryot 29" (25mm wide) tubeless ready, 32H
Tires	Maxxis, front: Ardent 29x2.40, EXO, TR / rear: Forekaster 29x2.35, EXO, TR
Pedals	NW-91K
Accessories	Tubeless flap + valves + Thru axle Bottle opener lever

Frame	Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle
Fork	Fox Rythm 34 Float Remote 2 Pos 15x110 130mm (29")
Shock	Fox Float DPS Performance 3-position lever, LV Evol 165x45mm Trunnion
Rear derailleur	SRAM GX Lunar Eagle, 12s
Crankset	SRAM GX Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M) / 175mm (L,XL)
Bottom bracket	SRAM DUB Pressfit MTB 92
Sprocket	SRAM PG1210 11-50T 12s
Chain	SRAM SX Eagle 12s
Brakes	SRAM G2 R Diffusion Black 4 pistons
Rotors	SRAM Centerline Rounded 200mm/180mm
Shiftlevers	SRAM NX Eagle12s
Headset	FSA Orbit Zero stack
Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm
Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
Stem	Lapierre alloy CNC, 0°, L: 45mm (S/M), 50mm (L), 55mm (XL)
Seatpost	Lapierre dropper post, Ø: 31.6mm, travel 80(S), 100mm (M), 130mm (L,XL)
Saddle	Selle Royal Vivo
Front hub	Lapierre by Fastace DF813, boost 15x110, 32H
Rear hub	Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H
Rims	Rodi Ryot 25x622, 32H Tubeless Ready
Tires	Front: Maxxis Ardent, EXO, 29x2.40, TR Rear: Maxxis Forekaster, EXO, 29x2.35, TR
Pedals	NW-91K
Accessories	Lapierre Thru axle + Bottle opener lever + Tubeless valves

Techzone

ZESTY TR




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

ZESTY TR

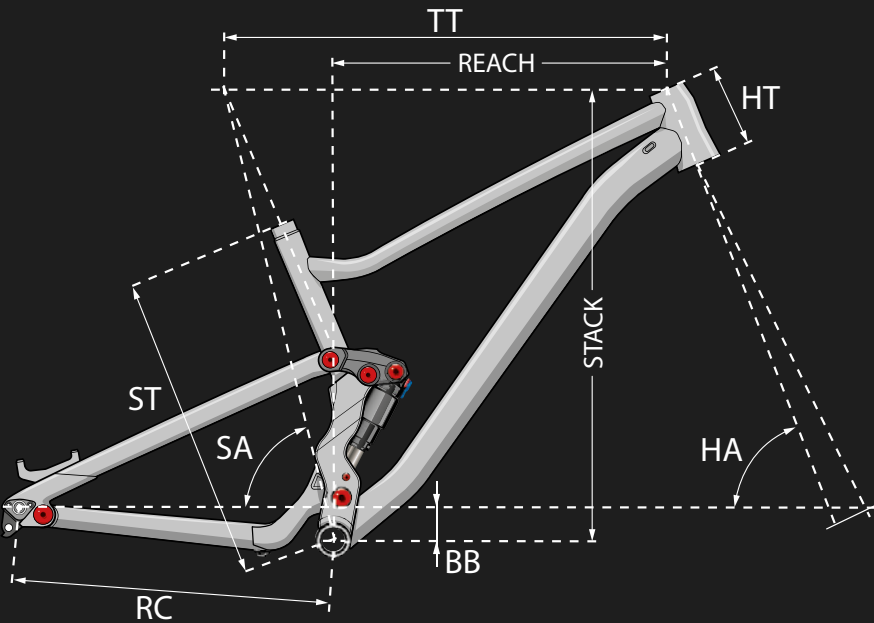

Size	XS	S	M	L	XL
ST (MM)	370,0	390,0	430,0	470,0	510,0
TT (MM)	546,0	591,0	613,0	633,0	655,0
HA (°)	66,5	66,0	66,0	66,0	66,0
SA (°)	74,0	74,5	75,0	75,5	76,0
RC (MM)	425,0	428,0	428,0	428,0	428,0
HT (MM)	95,0	100,0	110,0	120,0	130,0
BB (MM)	-25,0	-40,0	-40,0	-35,0	-35,0
STACK	561,0	598,0	608,0	612,0	621,0
REACH	385,0	425,0	450,0	475,0	500,0
User	>150	150-170	168-178	176-186	>184
Ref.	LZAPA370 Zesty TR 3.7	LZ_PA390	LZ_PA430	LZ_PA470	LZ_PA510

Zesty CF

RANGE

EN Performance uphill and stability downhill, our Zesty CF MTBs have it all.

DE Mit unserem Zesty CF meisterst du anspruchsvolle Anstiege und beherrschst jede Abfahrt. Hier bleiben keine Wünsche offen.



The Zesty CF,
more than just an allmountain bike:

- The most versatile mountain bike
- Performs equally well on steep climbs and technical descents
- High-end components tailored for mountain riding

Das Zesty CF,
mehr als nur ein Allmountain Bike:

- Unser vielseitigstes Mountainbike
- Überzeugt sowohl auf steilen Anstiegen als auch auf technischen Abfahrten
- Hochwertige Komponenten für beste Performance



MAINT

Zesty CF 6.9
Cool Matcha Green
LZHUA



MAINT

Zesty CF 7.9
Graphite Grey
LZJUA



MAINT

Zesty CF 8.9
Cranberry Juice Red
LZJUA



MAINT

Zesty CF 9.9
Fresh Mint Blue
LZLUA



MAINT

Zesty CF 10.9
Translucent Hex Blue
LZNUA

Zesty CF 6.9

COOL MATCHA GREEN

Ref. LZHUA




Non-binding illustrations.

Frame	Zesty Carbon UD SLI
Fork	RockShox Lyrik Select Charger RC 15x110 29"150mm travel 44mm offset
Shock	RockShox Deluxe Select + 205x60mm Trunnion/30x8mm
Rear derailleur	SRAM Eagle 90 T-TYPE 12s
Crankset	SRAM Eagle 90 DUB T-TYPE 32T 165mm (S), 170mm(M,L), 175mm (XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XS 1275 T-TYPE 10-52T 12s
Chain	SRAM Eagle 70 12s
Brakes	SRAM Maven Base 4 pistons
Rotors	SRAM Centerline 200mm/180mm Centerlock
Shiftlevers	SRAM Eagle 90 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M32, Width: 780mm, Rise: 20mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy ST-M50, +/-0°, Ø: 31.8mm, L: 40mm (S), 50mm (M,L,XL)
Seatpost	XLC by JD YSI60, Ø: 31.6mm, travel 125mm (S), 150mm (M), 170mm (L,XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, XD
Wheelset	XLC WR-M19 32H, 25-622
Tires	Front : Continental Kryptotal F Trail Soft 60-622 Rear : Continental Xynotal Trail Endurance 60-622
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Zesty CF 7.9

GRAPHITE GREY

Ref. LZIUA



Non-binding illustrations.

Frame	Zesty Carbon UD SLI
Fork	Fox 36 Float Performance Series 15x110 29"150mm travel 44mm offset
Shock	Fox Float Performance Series X 2pos 205x60mm Trunnion/30x8mm
Rear derailleur	Shimano Deore Di2 M6250 12s
Crankset	Shimano Deore 32T 165mm (S), 170mm (M,L), 175mm (XL)
Bottom bracket	Shimano MT800 Press Fit
Sprocket	Shimano Deore 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Shimano Deore 4 pistons
Rotors	Shimano RT-CL800 203/180mm centerlock
Shiftlevers	Shimano Deore Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M32, Width: 780mm, Rise: 20mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy ST-M50, +/-0°, Ø: 31.8mm, L: 40mm (S), 50mm (M,L,XL)
Seatpost	XLC by JD YSI60, Ø: 31.6mm, travel 125mm (S), 150mm (M), 170mm (L,XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, Microspline
Wheelset	XLC WR-M19 32H, 25-622
Tires	Front : Continental Kryptotal F Trail Soft 60-622 Rear : Continental Xynotal Trail Endurance 60-622
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Zesty CF 8.9

CRANBERRY JUICE RED

Ref. LZJUA



Zesty CF 9.9

FRESH MINT BLUE

Ref. LZLUA



Frame	Zesty Carbon UD SLI
Fork	RockShox Lyrik Select + Charger 3.1 RC2 15x110 29"150mm travel 44mm offset
Shock	RockShox Super Deluxe Select RT 205x60mm Trunnion/30x8mm
Rear derailleur	SRAM GX EAGLE AXS T-TYPE 12s
Crankset	SRAM GX EAGLE T-TYPE DUB 32T 165mm (S), 170mm (M,L) , 175mm (XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XS 1275 T-TYPE 10-52T 12s
Chain	SRAM GX T-TYPE 12s
Brakes	SRAM Maven Bronze 4 pistons
Rotors	SRAM HS2 200mm/180mm Centerlock
Shiftlevers	SRAM AXS Pod 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy HB-M32, Width: 780mm, Rise: 20mm, Backsweep : 9°, Ø: 31.8mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy ST-M50, +/-0°, Ø: 31.8mm, L: 40mm (S), 50mm (M,L,XL)
Seatpost	XLC by JD YSI60, Ø: 31.6mm, travel 125mm (S), 150mm (M), 170mm (L,XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss XM1700 Spline 30mm Centerlock XD
Tires	Front : Continental Kryptotal F Trail Soft 60-622 Rear : Continental Xynotal Trail Endurance 60-622
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Frame	Zesty Carbon UD SLI
Fork	Fox 36 Float Factory Grip X2 15x110 29"150mm travel 44mm offset
Shock	Fox Float X Factory 2-pos 205x60mm Trunnion/30x8mm
Rear derailleur	Shimano Deore XT Di2 M8250 12s
Crankset	Shimano Deore XT M8200 34T 165mm (S), 170mm(M,L), 175mm (XL)
Bottom bracket	Shimano MT800 Press Fit
Sprocket	Shimano Deore XT 10-51T 12s
Chain	Shimano M8100 12s
Brakes	Shimano Deore XT 4 pistons
Rotors	Shimano RT-CL800 203/180mm centerlock
Shiftlevers	Shimano Deore XT Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	SRAM Descendant Riser Carbon, Width: 800mm, Rise: 25mm, Ø: 31,8mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy ST-M50, +/-0°, Ø: 31.8mm, L: 40mm (S), 50mm (M,L,XL)
Seatpost	FOX Transfer Factory, Ø: 31.6mm, travel 120mm (S), 150mm (M,L), 180mm (XL)
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss XMC1501 Spline 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Trail Soft 60-622 Rear : Continental Xynotal Trail Endurance 60-622
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Zesty CF 10.9

TRANSLUCENT HEX BLUE

Ref. LZNUA




Non-binding illustrations.

Frame	Zesty Carbon UD SLI
Fork	RockShox Lyrik Ultimate Flight Attendant 15x110 29"150mm travel 44mm offset
Shock	RockShox Super Deluxe Ultimate Flight Attendant 205x60mm Trunnion/30x8mm
Rear derailleur	SRAM XO EAGLE AXS T-TYPE 12s
Crankset	SRAM XO EAGLE T-TYPE DUB 32T Powermeter 165mm (S), 170mm (M,L) , 175mm (XL)
Bottom bracket	SRAM DUB PF 92 MTB Wide
Sprocket	SRAM XS 1295 T-TYPE 10-52T 12s
Chain	SRAM XO T-TYPE 12s
Brakes	SRAM Maven Silver 4 pistons
Rotors	SRAM HS2 200mm/180mm Centerlock
Shiftlevers	SRAM AXS Pod 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	SRAM Descendant Riser Carbon, Width: 800mm, Rise: 25mm, Ø: 31,8mm
Grips	XLC S34 Gravity grips
Stem	SRAM Descendant, 0°, Ø: 31.8mm, L: 40mm (S), 50mm (M,L,XL)
Seatpost	RockShox Reverb AXS, Ø: 31.6mm, travel 100mm (S), 125mm (M), 150mm (L), 170mm (XL)
Saddle	Prologo Proxim W450 Steel 145mm
Wheelset	DT Swiss XMC1501 Spline 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Trail Soft 60-622 Rear : Continental Xynotal Trail Endurance 60-622
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Techzone

ZESTY CF



Find more details
on the Accell service portal
in Accentry.


service.accentry.com

Geometry

ZESTY CF

FLIP CHIP | 27.5

Travel
150mm

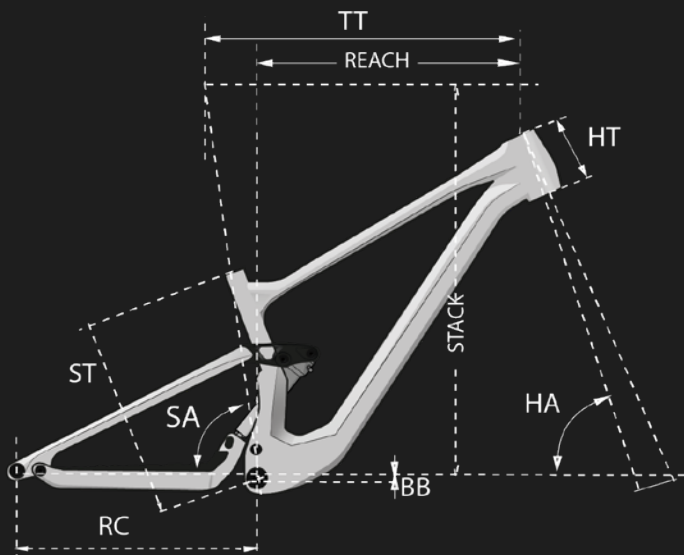


Size	S	M	L	XL
ST (mm)	383,1	409,9	436	463,7
Horizontal TT (mm)	577,3	604,4	626,5	653,5
HA (°)	64,6	64,6	64,6	64,6
Virtual SA (°)	77,1	77,1	77,1	77,1
RC (mm)	430,1	430,6	435,1	440,1
HT (mm)	105	115	125	135
Rear BB Drop (mm)	-10	-10	-10	-10
Front BB Drop (mm)	-26,4	-26,4	-26,4	-26,4
Fork Travel (mm)	150	150	150	150
Fork Length (mm)	570	570	570	570
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	150	150	150	150
Calculated Stack (mm)	617	626	635	644
Calculated Reach (mm)	436	461	481	506
Calculated WB (mm)	1195	1224	1254	1288
Calculated Average BB Drop (mm)	-16	-16	-16	-16
Calculated DT (mm) $\sqrt{(\text{Reach}^2 + \text{Stack}^2)}$	756	778	797	819
Front wheel diameter (mm)	720	720	720	720
Rear wheel diameter (mm)	687	687	687	687
BB height (mm)	334	334	334	334
Trail (Chasse)	177	177	177	177
User	160-172	170-182	180-190	>188
Ref.	LZ__A400	LZ__A430	LZ__A460	LZ__A500

Geometry

ZESTY CF

FLIP CHIP | 29

Travel
150mm

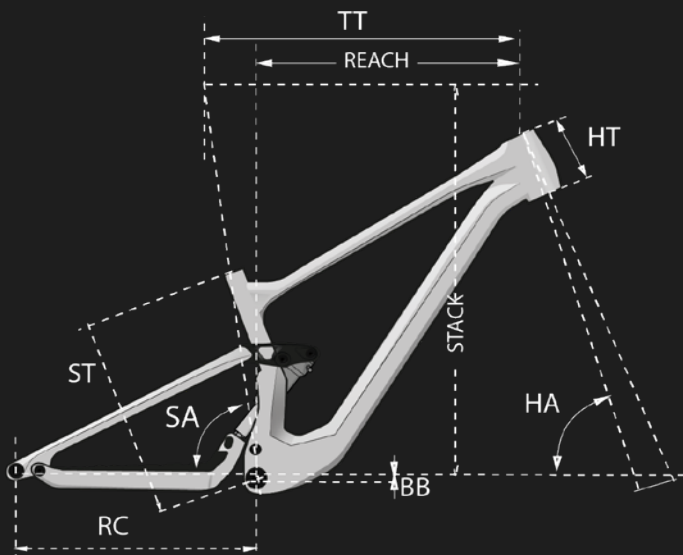

Size	S	M	L	XL
ST (mm)	383,1	409,9	436	463,7
Horizontal TT (mm)	577,5	604,6	626,7	653,7
HA (°)	64,5	64,5	64,5	64,5
Virtual SA (°)	77	77	77	77
RC (mm)	432,6	432,6	437,6	442,6
HT (mm)	105	115	125	135
Rear BB Drop (mm)	-26,4	-26,4	-26,4	-26,4
Front BB Drop (mm)	-26,4	-26,4	-26,4	-26,4
Fork Travel (mm)	150	150	150	150
Fork Length (mm)	570	570	570	570
Fork Offset (mm)	44	44	44	44
Rear Travel (mm)	150	150	150	150
Calculated Stack (mm)	617	626	635	644
Calculated Reach (mm)	435	460	480	505
Calculated WB (mm)	1197	1226	1255	1290
Calculated Average BB Drop (mm)	-26	-26	-26	-26
Calculated DT (mm) $\sqrt{(\text{Reach}^2 + \text{Stack}^2)}$	755	777	796	818
Front wheel diameter (mm)	720	720	720	720
Rear wheel diameter (mm)	720	720	720	720
BB height (mm)	334	334	334	334
Trail (Chasse)	178	178	178	178
User	160-172	170-182	180-190	>188
Ref.	LZ__A400	LZ__A430	LZ__A460	LZ__A500

Spicy CF

RANGE

EN Enduro mountain bikes developed in collaboration with the sport's best riders.

DE Enduro-Bikes, entwickelt in Zusammenarbeit mit den besten Fahrer:innen der Welt



The Spicy CF, more than just an Enduro bike:

- Bike of the Lapierre Gravity Collective team
- Two-in-one: high pivot and low pivot configuration
- Aggressive and ultra-stable at high speeds

Das Spicy CF, mehr als nur ein Enduro Bike:

- Offizielles Bike des Lapierre Gravity Collective Teams
- Zwei-in-eins-Konzept: High Pivot- und Low Pivot-Konfiguration möglich
- Aggressiv und ultrastabil bei hohen Geschwindigkeiten



Spicy CF 6.9

Crimson Red
LSBUA



Spicy CF 7.9

Pollen Yellow
LSCUA



Spicy CF 8.9

Glowing Green
LSJUA



Spicy CF Team

Translucent Hex Blue
LSDUA

Spicy CF 6.9

CRIMSON RED

Ref. LSBUA



Spicy CF 7.9

POLLEN YELLOW

Ref. LSCUA



Frame	Carbon UD SLI
Fork	RockShox ZEB Select Charger RC 15x110 29"180mm travel 44mm offset
Shock	RockShox Vivid Select 205x65mm Trunnion/15x8mm
Rear derailleur	SRAM Eagle 70 T-TYPE 12s
Crankset	SRAM Eagle 70 DUB 32T 165mm(XS,S,M), 170mm (L,XL)
Bottom bracket	SRAM DUB BSA 73mm MTB Wide
Sprocket	SRAM XS 1270 T-TYPE 10-52T 12s
Chain	SRAM Eagle 70 T-TYPE 12s
Brakes	SRAM Maven Base 4 pistons
Rotors	SRAM Centerline 200mm
Shiftlevers	SRAM Eagle 70 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm (XS,S), 50mm (M,L,XL)
Seatpost	XLC by JD YSI60, Ø: 31.6mm, travel 125mm (XS,S), 150mm (M), 170mm (L), 200mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim Nembo Steel 145mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, HG
Rims	Front : XLC WR-M49 32H, 30-622 Rear : XLC WR-M47 32H, 30-584
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 60-584
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves + Tool Box with pouch + Accessory Box for Low Pivot Point configuration

Frame	Carbon UD SLI
Fork	Fox 38 Float Performance-Elite GRIPX2 15x110 29"180mm travel 44mm offset
Shock	Fox Float X2 Performance-Elite 2pos 205x65mm Trunnion/15x8mm
Rear derailleur	Shimano Deore Di2 M6250 12s
Crankset	Shimano Deore 32T 165mm (XS,S,M), 170mm (L,XL)
Bottom bracket	Shimano BSA MT801
Sprocket	Shimano Deore 10-51T 12s
Chain	Shimano M6100 12s
Brakes	Shimano Deore 4 pistons
Rotors	Shimano RT-CL700 203/203mm centerlock
Shiftlevers	Shimano Deore Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm (XS,S), 50mm (M,L,XL)
Seatpost	XLC by JD YSI60, Ø: 31.6mm, travel 125mm (XS,S), 150mm (M), 170mm (L,XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim Nembo Steel 145mm
Front hub	XLC HF-M55, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M55, boost 12x148, 32H Centerlock, Microspline
Rims	Front : XLC WR-M49 32H, 30-622 Rear : XLC WR-M47 32H, 30-584
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 60-584
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves + Tool Box with pouch + Accessory Box for Low Pivot Point configuration

Non-binding illustrations.

Non-binding illustrations.

Spicy CF 8.9

GLOWING GREEN

Ref. LSJUA



Spicy CF Team

TRANSLUCENT HEX BLUE

Ref. LSDUA



Frame	Carbon UD SLI
Fork	Fox 38 Float Factory Grip X2 15x110 29"180mm travel 44mm offset
Shock	Fox Float X2 Factory 2-pos 205x65mm Trunnion/15x8mm
Rear derailleur	Shimano Deore XT Di2 M8250 12s
Crankset	Shimano Deore XT M8200 32T 165mm (XS,S,M), 170mm (M,XL)
Bottom bracket	Shimano BSA MT801
Sprocket	Shimano Deore XT 10-51T 12s
Chain	Shimano M8100 12s
Brakes	Shimano Deore XT 4 pistons
Rotors	Shimano RT-CL800 203mm centerlock
Shiftlevers	Shimano Deore XT Di2 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	XLC Alloy, Width: 800mm, Rise: 30mm, Backsweep : 9°, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	XLC alloy CNC, 0°, Ø: 35mm, L: 40mm (XS,S), 50mm (M,L,XL)
Seatpost	FOX Transfer, Ø: 31.6mm, travel 120mm (XS,S), 150mm (M), 180mm (L), 210mm (XL) + XLC SP-X23 Remote lever
Saddle	Prologo Proxim Nembo Steel 145mm
Wheelset	DT Swiss EX1700 Spline 30mm Centerlock Microspline
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 60-584
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves + Tool Box with pouch + Accessory Box for Low Pivot Point configuration

Frame	Carbon UD SLI
Fork	RockShox ZEB Ultimate Flight Attendant 15x110 29"180mm travel 44mm offset
Shock	RockShox Vivid Ultimate Flight Attendant 205x65mm Trunnion/15x8mm
Rear derailleur	SRAM XO EAGLE AXS T-TYPE 12s
Crankset	SRAM XO EAGLE T-TYPE DUB 32T Powermeter 165mm (XS,S,M) , 170mm (L,XL)
Bottom bracket	SRAM DUB BSA 73mm MTB Wide
Sprocket	SRAM XS 1295 T-TYPE 10-52T 12s
Chain	SRAM XO T-TYPE 12s
Brakes	SRAM Maven Silver 4 pistons
Rotors	SRAM HS2 200mm Centerlock
Shiftlevers	SRAM AXS Pod 12s
Headset	Acros Integrated ZS56/ZS56 Block Lock
Handlebar	SRAM Descendant Riser Downhill, Width: 800mm, Rise: 25mm, Ø: 35mm
Grips	XLC S34 Gravity grips
Stem	SRAM Descendant, 0°, Ø: 35mm, L: 40mm (XS,S), 50mm (M,L,XL)
Seatpost	RockShox Reverb AXS, Ø: 31.6mm, travel 125mm (XS,S), 150mm (M), 175mm (L,XL)
Saddle	Prologo Proxim Nembo Steel 145mm
Wheelset	DT Swiss EX1700 Spline 30mm Centerlock XD
Tires	Front : Continental Kryptotal F Enduro Super soft 60-622 Rear : Continental Kryptotal R Enduro Soft 60-584
Pedals	XLC by VP PD-M29
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves + Tool Box with pouch + Accessory Box for Low Pivot Point configuration

Techzone

SPICY CF



Find more details
on the Accell service portal
in Accentry.


service.accentry.com

Geometry

SPICY CF

HIGH PIVOT | 27.5

Travel
173mm

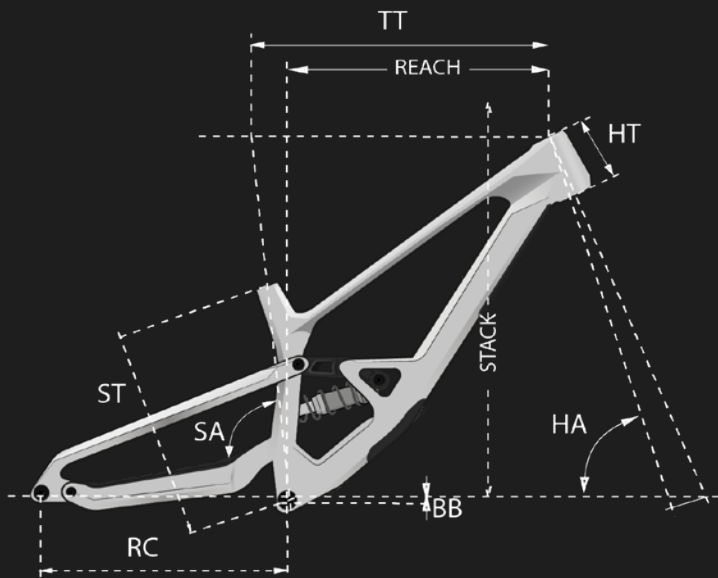


Size	XS	S	M	L	XL
ST (mm)	370	370	400	430	460
Horizontal TT (mm)	543,5	570,4	596,4	617,3	644,2
HA (°)	63,5	63,5	63,5	63,5	63,5
Virtual SA (°)	78	78	78	78	78
RC (mm)	440	440	440	445	450
HT (mm)	100	110	115	120	130
Rear BB Drop (mm)	-10	-10	-10	-10	-10
Front BB Drop (mm)	-25	-25	-25	-25	-25
Fork Travel (mm)	180	180	180	180	180
Fork Length (mm)	595	595	595	595	595
Fork Offset (mm)	44	44	44	44	44
Rear Travel (mm)	172	172	172	172	172
Calculated Stack (mm)	627	636	641	645	654
Calculated Reach (mm)	410	435	460	480	505
Calculated WB (mm)	1200	1229	1256	1283	1318
Calculated Average BB Drop (mm)	-16	-15	-15	-15	-15
Calculated DT (mm) $\sqrt{(\text{Reach}^2 + \text{Stack}^2)}$	750	771	789	804	827
Front wheel diameter (mm)	720	720	720	720	720
Rear wheel diameter (mm)	690	690	690	690	690
BB height (mm)	335	335	335	335	335
Trail (Chasse)	186	186	186	186	186
User	152-164	163-172	170-182	180-190	>188
Ref.	LS__A350	LS__A370	LS__A400	LS__A430	LS__A460

Geometry

SPICY CF

LOW PIVOT | 27.5

Travel
173mm

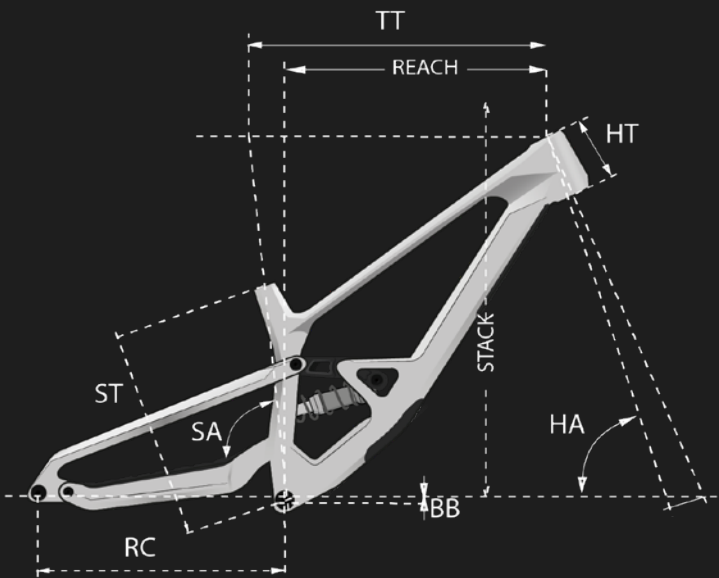


Size	XS	S	M	L	XL
ST (mm)	370	370	400	430	460
Horizontal TT (mm)	543,5	570,4	596,4	617,3	644,2
HA (°)	63,5	63,5	63,5	63,5	63,5
Virtual SA (°)	78	78	78	78	78
RC (mm)	439,8	439,8	439,8	444,8	449,8
HT (mm)	100	110	115	120	130
Rear BB Drop (mm)	-10	-10	-10	-10	-10
Front BB Drop (mm)	-25	-25	-25	-25	-25
Fork Travel (mm)	180	180	180	180	180
Fork Length (mm)	595	595	595	595	595
Fork Offset (mm)	44	44	44	44	44
Rear Travel (mm)	172	172	172	172	172
Calculated Stack (mm)	627	636	641	645	654
Calculated Reach (mm)	410	435	460	480	505
Calculated WB (mm)	1199	1228	1255	1282	1317
Calculated Average BB Drop (mm)	-15	-15	-15	-15	-15
Calculated DT (mm) $\sqrt{(\text{Reach}^2 + \text{Stack}^2)}$	750	771	789	804	827
Front wheel diameter (mm)	720	720	720	720	720
Rear wheel diameter (mm)	690	690	690	690	690
BB height (mm)	335	335	335	335	335
Trail (Chasse)	186	186	186	186	186
User	152-164	163-172	170-182	180-190	>188
Ref.	LS__A350	LS__A370	LS__A400	LS__A430	LS__A460

Geometry

SPICY CF

HIGH PIVOT | 29

Travel
173mm

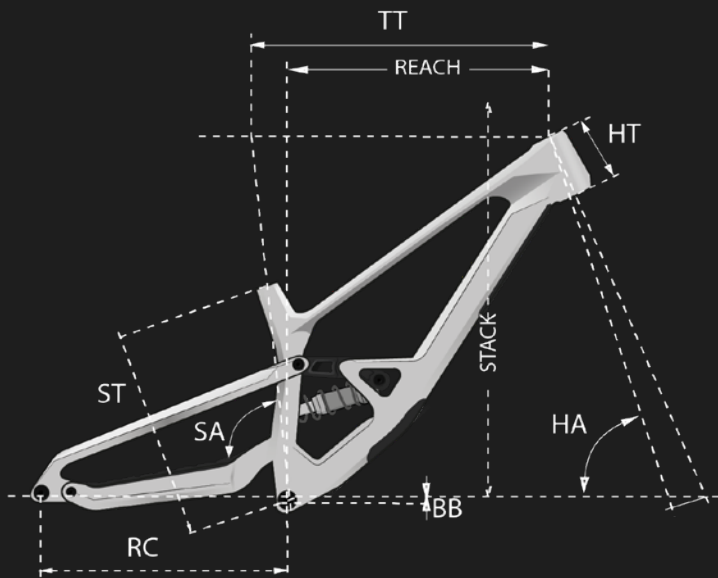


Size	XS	S	M	L	XL
ST (mm)	370	370	400	430	460
Horizontal TT (mm)	543,5	570,4	596,4	617,3	644,2
HA (°)	63,5	63,5	63,5	63,5	63,5
Virtual SA (°)	78	78	78	78	78
RC (mm)	444	444	444	449	454
HT (mm)	100	110	115	120	130
Rear BB Drop (mm)	-25	-25	-25	-25	-25
Front BB Drop (mm)	-25	-25	-25	-25	-25
Fork Travel (mm)	180	180	180	180	180
Fork Length (mm)	595	595	595	595	595
Fork Offset (mm)	44	44	44	44	44
Rear Travel (mm)	172	172	172	172	172
Calculated Stack (mm)	627	636	641	645	654
Calculated Reach (mm)	410	435	460	480	505
Calculated WB (mm)	1203	1232	1260	1287	1321
Calculated Average BB Drop (mm)	-25	-25	-25	-25	-25
Calculated DT (mm) $\sqrt{(Reach^2+Stack^2)}$	750	771	789	804	827
Front wheel diameter (mm)	720	720	720	720	720
Rear wheel diameter (mm)	720	720	720	720	720
BB height (mm)	335	335	335	335	335
Trail (Chasse)	186	186	186	186	186
User	152-164	163-172	170-182	180-190	>188
Ref.	LS__A350	LS__A370	LS__A400	LS__A430	LS__A460

Geometry

SPICY CF

LOW PIVOT | 29

Travel
173mm

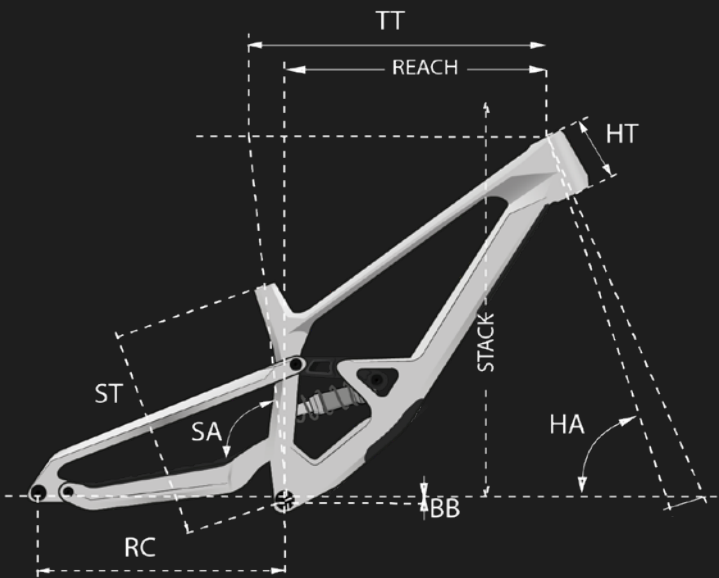

Size	XS	S	M	L	XL
ST (mm)	370	370	400	430	460
Horizontal TT (mm)	543,5	570,4	596,4	617,3	644,2
HA (°)	63,5	63,5	63,5	63,5	63,5
Virtual SA (°)	78	78	78	78	78
RC (mm)	442,3	442,3	442,3	447,3	452,3
HT (mm)	100	110	115	120	130
Rear BB Drop (mm)	-25	-25	-25	-25	-25
Front BB Drop (mm)	-25	-25	-25	-25	-25
Fork Travel (mm)	180	180	180	180	180
Fork Length (mm)	595	595	595	595	595
Fork Offset (mm)	44	44	44	44	44
Rear Travel (mm)	172	172	172	172	172
Calculated Stack (mm)	627	636	641	645	654
Calculated Reach (mm)	410	435	460	480	505
Calculated WB (mm)	1201	1230	1258	1285	1319
Calculated Average BB Drop (mm)	-25	-25	-25	-25	-25
Calculated DT (mm) $\sqrt{(Reach^2+Stack^2)}$	750	771	789	804	827
Front wheel diameter (mm)	720	720	720	720	720
Rear wheel diameter (mm)	720	720	720	720	720
BB height (mm)	335	335	335	335	335
Trail (Chasse)	186	186	186	186	186
User	152-164	163-172	170-182	180-190	>188
Ref.	LS__A350	LS__A370	LS__A400	LS__A430	LS__A460

Road Bikes

EN Each road bike we craft carries the racing DNA of our World-Tour team, Picnic PostNL, offering the exhilarating thrill of elite performance.

DE Jedes unserer Rennräder trägt die DNA unseres World-Tour-Teams Picnic PostNL in sich und bietet dir das unvergleichliche Gefühl echter Spitzenperformance.

	XS	S	M	L	XL	XXL
Crosshill AL	155-162	60-172	170-182	176-186	188 -195	-
Crosshill CF	153-160	158-165	164-175		184-195	>195
Sensium	155-162	160-172	170-182	180-190	188-195	>195
Pulsium	153-160	158-165	164-175	180 -190	184-195	>195
Xelius DRS	155-162	160-172	170-182	174-185	190-200	>195
Aerostorm DRS	-	150-170	168-178	174-185	>184	-



Road Bikes

RANGE OVERVIEW

Crosshill AL

RANGE

EN Don't make a U-turn when the road stops. Don't hold back. Discover. Explore.
Open the field of possibilities and discover a MAINT universe.

DE Der Weg endet nicht mit dem Asphalt. Mach dich frei von Grenzen – entdecke das Abenteuer
abseits des Bekannten. Erlebe neue Wege und ein ganz eigenes Gravel-Universum.



The Crosshill AL,
more than just a gravel bike:

- Versatility to no longer compromise between road and trails
- Accepts equipment for bikepacking
- Comfortable geometry tailored for endurance

Das Crosshill AL,
mehr als nur ein Gravel-Bike:

- Vielseitigkeit ohne Kompromisse zwischen Straße und Trail
- Kompatibel mit Bikepacking-Ausrüstung
- Komfortable Geometrie – gemacht für Ausdauer und lange Strecken



MAINT

Crosshill AL 2.0

Pumice Beige
LCAUA



MAINT

Crosshill AL 3.0

Cool Matcha Green
LCBUA



MAINT

Crosshill AL 4.0

Sage Leaf Green
LCCUA

Non-binding illustrations.

Crosshill AL 2.0

PUMICE BEIGE

Ref. LCAUA



Frame	Crosshill Alloy
Fork	Lapierre Carbon Blades, Alloy Steerer, 12mm Thru Axle
Front derailleur	Shimano CUES U6000 brazed-on
Rear derailleur	Shimano CUES U6000 10/11s
Crankset	Shimano CUES FC-U6010, 46-32T 170mm (XS,S,M), 175mm (L,XL)
Bottom bracket	Shimano BSA MT501
Sprocket	Shimano CUES LG300 11-39T 10s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Shimano CUES
Rotors	Shimano SM-RT30 160mm centerlock
Shiftlevers	Shimano CUES Road
Headset	FSA Orbit NO.57B Semi-integrated
Handlebar	Lapierre alloy gravel bar, Width: 420mm (XS,S), 440mm (M), 460mm (L,XL), Drop: 114mm, Reach: 70mm, Rise: 12mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 90mm (XS,S), 100mm (M), 110mm (L), 120mm (XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 350mm
Saddle	XLC SA -S10 Sport Steel Rail 143mm
Front hub	XLC HF-G12, 12x100, 32H Centerlock
Rear hub	XLC HF-G12, 12x142, 32H Centerlock HG
Rims	XLC WR-M19 32H, 25-622
Tires	Mitas X-Road 700x40 Black 60 TPI
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever

Crosshill AL 3.0

COOL MATCHA GREEN

Ref. LCBUA



Frame	Crosshill Alloy
Fork	Lapierre Carbon Blades, Alloy Steerer, 12mm Thru Axle
Front derailleur	Shimano CUES U6000 brazed-on
Rear derailleur	Shimano CUES U6000 10/11s
Crankset	Shimano CUES FC-U6010, 46-32T 170mm (XS,S,M), 175mm (L,XL)
Bottom bracket	Shimano BSA MT501
Sprocket	Shimano CUES LG400 11-45T 11s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Shimano CUES
Rotors	Shimano SM-RT30 160mm centerlock
Shiftlevers	Shimano CUES Road
Headset	FSA Orbit NO.57B Semi-integrated
Handlebar	Lapierre alloy gravel bar, Width: 420mm (XS,S), 440mm (M), 460mm (L,XL), Drop: 114mm, Reach: 70mm, Rise: 12mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 90mm (XS,S), 100mm (M), 110mm (L), 120mm (XL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 350mm
Saddle	XLC SA -S10 Sport Steel Rail 143mm
Wheelset	Lapierre Gravel Alloy 25mm Tubeless Ready
Tires	Continental Terra Trail 40-622 black/black wire skin SL
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Non-binding illustrations.

Crosshill AL 4.0

SAGE LEAF GREEN

Ref. LCCUA



Non-binding illustrations.

Frame	Crosshill Alloy
Fork	Lapierre Carbon Blades, Alloy Steerer, 12mm Thru Axle
Front derailleur	Shimano GRX RX820 Brazed-On
Rear derailleur	Shimano GRX RX820 12s
Crankset	Shimano GRX RX610 46-30T 170mm (XS,S), 172.5mm (M), 175mm (L,XL)
Bottom bracket	Shimano BSA MT501
Sprocket	Shimano CS-HG710 11-36T 12s
Chain	Shimano M7100 12s
Brakes	Shimano RX410
Rotors	Shimano SM-RT70 160mm Centerlock
Shiftlevers	Shimano GRX ST-RX610
Headset	FSA Orbit NO.57B Semi-integrated
Handlebar	Lapierre alloy gravel bar, Width: 420mm (XS,S), 440mm (M), 460mm (L,XL), Drop: 114mm, Reach: 70mm, Rise: 12mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 90mm (XS,S), 100mm (M), 110mm (L), 120mm (XL)
Seatpost	Lapierre by JD, Ø: 27.2mm, 315mm/travel 70mm (XS,S), 360 mm/Travel 90 mm (M,L), 405 mm/Travel 110 mm (XL)
Saddle	XLC SA -S10 Sport Steel Rail 143mm
Wheelset	Lapierre Gravel Alloy 25mm Tubeless Ready
Tires	Continental Terra Trail 40-622 black/brown foldable skin
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Tubeless valves

Techzone

CROSSHILL AL




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

CROSSHILL AL

Tire width max:
45mm
700x40 with mudguard

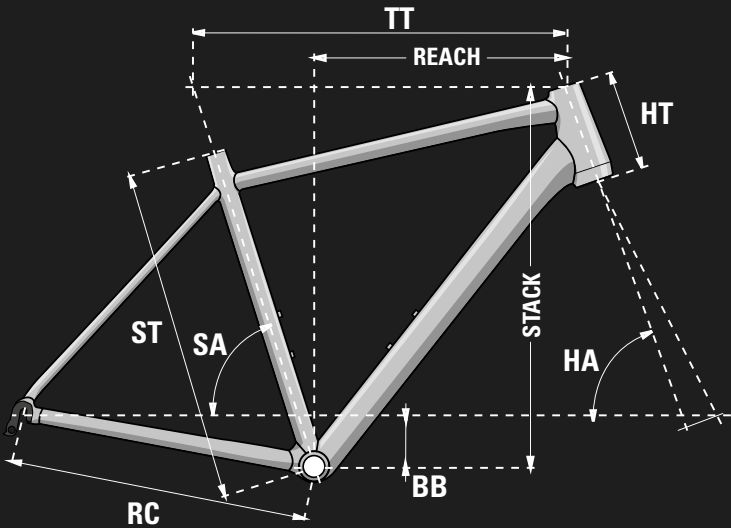

Size	XS	S	M	L	XL
ST (MM)	420	460	500	550	600
TT (MM)	525	544	561	579	596
HA (°)	73	73	72.5	72.5	72
SA (°)	70	70.5	71	71	71.5
RC (MM)	435	435	435	435	435
HT (MM)	90	120	150	180	210
BB (MM)	-75	-75	-75	-75	-75
REACH	366	376	378	388	389
STACK	517	547	577	605	636
User	155-162	160-172	170-182	180 -190	188 -195
Ref.	LC_UA420	LC_UA460	LC_UA500	LC_UA550	LC_UA600

Crosshill CF

RANGE

EN An invitation for adventure: move from the tarmac to the trails, don't worry about the rain, puddles or storms.

DE Deine Einladung zum Abenteuer: Wechsle vom Asphalt auf den Trail, ohne dir Gedanken über Regen, Pfützen oder Sturm zu machen – das Crosshill CF ist bereit, wenn du es bist.



The Crosshill CF,
more than just a carbon gravel bike:

- An adventure and/or competition bike
- Carbon frame balancing comfort and efficiency on trails
- For experienced athletes and explorers

Das Crosshil CF,
mehr als nur ein Carbon-Gravel-Bike:

- Perfekt für Abenteuer und/oder Wettkampf
- Carbonrahmen mit optimaler Balance aus Komfort und Effizienz im Gelände
- Für erfahrene Sportler:innen und Entdecker:innen gemacht



MAINT

Crosshill CF 5.0

Crepuscule Blue
LCEUA



MAINT

Crosshill CF 6.0

Cranberry Juice Red
LCFUA



ON

Crosshil CF 7.0

Cold Rain Grey
LCGTA



MAINT

Crosshill CF 8.0

Midnight Plum Purple
LCHUA



MAINT

Crosshill CF 9.0

Translucent Hex Blue
LCJUA

Crosshill CF 5.0

CREPUSCULE BLUE

Ref. LCEUA



Crosshill CF 6.0

STRONG RUBY RED

Ref. LCFUA



Frame	Crosshill Carbon UD SLI
Fork	Crosshill Carbon UD SLI
Front derailleur	Shimano GRX RX820 Brazed-On
Rear derailleur	Shimano GRX RX820 12s
Crankset	Shimano GRX RX610 46-30T 170mm (XS,S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano CS-HG710 11-36T 12s
Chain	Shimano M7100 12s
Brakes	Shimano BR- RX410
Rotors	Shimano SM-RT70 160mm Centerlock
Shiftlevers	Shimano GRX ST-RX610
Headset	Acros integrated
Handlebar	XLC alloy gravel bar, Width: 420mm (XS,S), 440mm (M), 460mm (L,XL), Drop: 114mm, Reach: 70mm, Rise: 12mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL,XXL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 350mm
Saddle	Prologo Akero R PAS Steel 150mm
Wheelset	Lapierre Gravel Alloy 25mm Tubeless Ready
Tires	Continental Terra Trail ShieldWall 45-622
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Go Pro Mount for GPS with Garmin & Wahoo adapter

Frame	Crosshill Carbon UD SLI
Fork	Crosshill Carbon UD SLI
Front derailleur	Shimano GRX RX820 Brazed-On
Rear derailleur	Shimano GRX RX820 12s
Crankset	Shimano GRX RX820 48-31T 170mm (XS,S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano CS-HG710 11-36T 12s
Chain	Shimano M7100 12s
Brakes	Shimano BR-RX820
Rotors	Shimano SM-RT70 160mm Centerlock
Shiftlevers	Shimano GRX ST-RX820
Headset	Acros integrated
Handlebar	Lapierre alloy gravel bar, Width: 420mm (XS,S), 440mm (M,L), 460mm (XL,XXL), Drop: 114mm, Reach: 70mm, Rise: 12mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL,XXL)
Seatpost	XLC by JD SP-R30, Ø: 27.2mm, 350mm
Saddle	Prologo Akero R PAS Steel 150mm
Wheelset	DT Swiss G1800 Spline 24mm Centerlock ASF11
Tires	Continental Terra Trail ShieldWall 45-622
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Go Pro Mount for GPS with Garmin & Wahoo adapter

Non-binding illustrations.

Non-binding illustrations.

Crosshill CF 7.0

COLD RAIN GREY

Ref. LCGTA



Crosshill CF 8.0

MIDNIGHT PLUM PURPLE

Ref. LCHUA



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano GRX Di2 RX825 Brazed-On
Rear derailleur	Shimano GRX Di2 RX825 12s
Crankset	Shimano GRX RX820 48-31T 170mm (XS,S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano CS-HG710 11-36T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano SM-RT70 160mm Centerlock
Shiftlevers	Shimano GRX ST-RX825
Headset	Acros integrated
Handlebar	Lapierre Carbon gravel bar, Width: 420mm (XS,S,M), 440mm (L,XL,XXL), Drop: 122mm, Reach: 68mm, Rise: 20mm, Flare: 12°
Grips	Lapierre Tape
Stem	Lapierre alloy, internal routing, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL,XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, L: 350mm
Saddle	Fizik Terra Argo X7 150mm
Wheelset	DT Swiss GR1600 Spline
Tires	WTB Raddler TCS LIGHT 700x44c black 60TPI
Pedals	VP-335 Clips&Strap
Accessories	Lapierre Thru axle and bottle opener lever + Go Pro Mount for GPS with Garmin & Wahoo adapter

Frame	Crosshill Carbon UD SLI
Fork	Crosshill Carbon UD SLI
Rear derailleur	SRAM Force XPLR AXS 13s
Crankset	SRAM Force XPLR 40T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1371 XPLR 10-46T 13s
Chain	SRAM Force 13s
Brakes	SRAM Force
Rotors	SRAM Paceline 160mm Centerlock
Shiftlevers	SRAM Force ETAP AXS D2
Headset	Acros integrated
Handlebar	Lapierre Carbon gravel bar, Width: 420mm (XS,S,M), 440mm (L,XL,XXL), Drop: 122mm, Reach: 68mm, Rise: 20mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL,XXL)
Seatpost	Lapierre Carbon, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Prologo Scratch M5 PAS AGX 140mm T2.0
Wheelset	Zipp 303 XPLR S Carbon Centerlock XDR
Tires	Schwalbe G-One R Evo, SuperRace, V-Guard TLE, 45-622 ADDIX Race 67EPI
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Go Pro Mount for GPS with Garmin & Wahoo adapter

Crosshill CF 9.0

TRANSLUCENT HEX BLUE

Ref. LCJUA



Non-binding illustrations.

Frame	Crosshill Carbon UD SLI
Fork	Crosshill Carbon UD SLI
Rear derailleur	SRAM Force XPLR AXS 13s
Crankset	SRAM Force XPLR with Powermeter 40T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1371 XPLR 10-46T 13s
Chain	SRAM Force 13s
Brakes	SRAM Force
Rotors	SRAM Paceline 160mm Centerlock
Shiftlevers	SRAM Force ETAP AXS D2
Headset	Acros integrated
Handlebar	Lapierre Carbon gravel bar, Width: 420mm (XS,S,M), 440mm (L,XL,XXL), Drop: 122mm, Reach: 68mm, Rise: 20mm, Flare: 12°
Grips	XLC BT-G40 ELASTOMERTAPE
Stem	Lapierre alloy, Ø: 31.8mm, L: 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL,XXL)
Seatpost	Lapierre Carbon, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Prologo Scratch M5 PAS AGX 140mm T2.0
Wheelset	DT Swiss GRC1100 24mm Centerlock XDR
Tires	Schwalbe G-One R Evo, SuperRace, V-Guard TLE, 45-622 ADDIX Race 67EPI
Pedals	XLC PD-R01 Race
Accessories	Lapierre Thru axle and bottle opener lever + Go Pro Mount for GPS with Garmin & Wahoo adapter

Techzone

CROSSHILL CF




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

CROSSHILL CF

Tire width max:
45mm

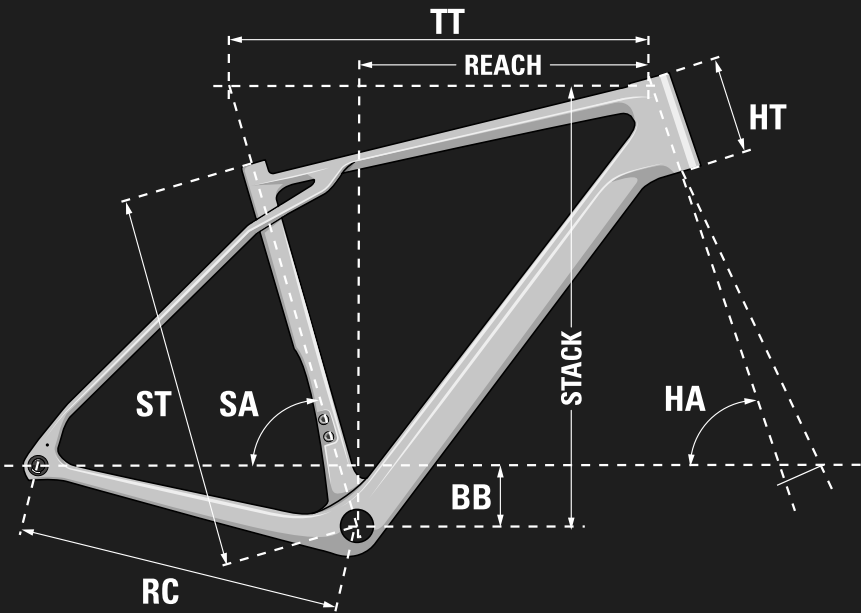

Size	XS	S	M	L	XL	XXL
ST (mm)	440	460	490	520	550	580
TT (mm)	529	541	552	570	585	601
HA (°)	70,5	71	71	71,5	71,5	71,5
SA (°)	73,5	73,5	73,5	73	72,5	72,5
RC DSC	430	430	430	430	430	430
HT (mm)	95	115	130	150	170	195
BB (mm)	71	71	71	70	70	70
Frk Length	425	425	425	425	425	425
Frk Offset	45	45	45	45	45	45
Stack	546	567	581	601	620	644
Reach	367	373	380	386	390	398
WB DSC	1007	1016	1027	1036	1045	1062
User	153-160	158-165	164-175	174-185	184-195	>195
Ref.	LC_T_440	LC___460	LC___490	LC___520	LC___550	LC___580

Sensium

RANGE

EN The gateway to the world of road cycling, so you can experience the thrill of speed and pleasure every time you take to the country roads, alone or with friends.

DE Dein Einstieg in die Welt des Rennrads. Erlebe jedes Mal aufs Neue die Freude an Geschwindigkeit – ob allein oder gemeinsam auf Touren über Landstraßen.



ON

Sensium 1.0

Electric Blue
LSFPA



ON

Sensium 2.0

Intense Red
LSGPA



ON

Sensium 3.0

Anthra Grey
LSHPA



ON

Sensium 3.0 Disc

Anthra Grey
LSHPB

The Sensium,
more than just a road bike:

- Dynamic & responsive alloy frame
- Endurance/sport geometry
- Sleek lines

Das Sensium,
mehr als nur ein simples Rennrad:

- Dynamischer, reaktionsfreudiger Aluminiumrahmen
- Endurance-/Sport-Geometrie
- Elegantes, schlankes Design

Non-binding illustrations.

Sensium 1.0

ELECTRIC BLUE

Ref. LSFPA



Sensium 2.0

INTENSE RED

Ref. LSGPA



Non-binding illustrations.

Frame	Sensium Supreme 5 alloy smooth weldings
Fork	Sensium carbon / alloy steerer
Front derailleur	Shimano Claris FD-R2000BM
Rear derailleur	Shimano Claris RD-R2000-GS, 8s
Crankset	Shimano Claris FC-R2000, 50-34T 170mm (XS/S/M) / 175mm (L/XL/XXL)
Bottom bracket	Shimano BSA
Sprocket	Shimano HG50 11-34T 8s
Chain	KMC Z8 8s
Brakes	Promax RC-482
Shiftlevers	Shimano Claris ST-R2000 2x8s
Headset	FSA NO.9M/TH 1-1/8", 36°/36° ACB
Handlebar	Lapierre alloy, Width: 400mm (XS/S), 420mm (M/L/XL), 440mm (XXL)
Grips	Lapierre tape
Stem	Lapierre alloy, -7°, Ø: 31.8mm, L: 80mm (XS/S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, L: 350mm
Saddle	Selle Italia Model X Superflow 145mm
Front hub	Shimano RS300 32H
Rear hub	Shimano FH-RS300 32H
Rims	Ryde ZAC2000 622x19c double wall 32H
Tires	Continental Ultra Sport 3 SL 700x28
Pedals	VP-335 Clips&Strap

Frame	Sensium Supreme 5 alloy smooth weldings
Fork	Sensium carbon / alloy steerer
Front derailleur	Shimano Sora FD-R3000BM
Rear derailleur	Shimano Sora RD-R3000-GS, 9s
Crankset	Shimano Sora FC-R3000, 50-34T 170mm (XS/S/M) / 175mm (L/XL/XXL)
Bottom bracket	Shimano BSA
Sprocket	Shimano HG200 11-34T 9s
Chain	KMC X9 9s
Brakes	Promax RC-482
Shiftlevers	Shimano Sora ST-R3000 2x9s
Headset	FSA NO.9M/TH 1-1/8", 36°/36° ACB
Handlebar	Lapierre alloy, Width: 400mm (XS/S), 420mm (M/L/XL), 440mm (XXL)
Grips	Lapierre tape
Stem	Lapierre alloy, -7°, Ø: 31.8mm, L: 80mm (XS/S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, L: 350mm
Saddle	Selle Italia Model X Superflow 145mm
Front hub	Shimano RS300 32H
Rear hub	Shimano FHRS300 32H
Rims	Ryde ZAC2000 622x19c double wall 32H
Tires	Continental Ultra Sport 3 SL 700x28
Pedals	VP-335 Clips&Strap

Sensium 3.0

ANTHRA GREY

Ref. LSHPA



Sensium 3.0 Disc

ANTHRA GREY

Ref. LSHPB



Frame	Sensium Supreme 5 alloy smooth weldings
Fork	Sensium carbon / alloy steerer
Front derailleur	Shimano Tiagra FD-R4700BM
Rear derailleur	Shimano Tiagra RD-R4700-GS, 10s
Crankset	Shimano Tiagra FC-R4700, 50-34T 170mm (XS/S) / 172.5mm (M/L) / 175mm (XL/XXL)
Bottom bracket	Shimano BSA
Sprocket	Shimano HG500 11-34T 10s
Chain	Shimano HG54 10s
Brakes	Shimano BR-R451
Shiftlevers	Shimano Tiagra ST-R4700 2x10s
Headset	FSA NO.9M/TH 1-1/8", 36°/36° ACB
Handlebar	Lapierre alloy, Width: 400mm (XS/S), 420mm (M/L/XL), 440mm (XXL)
Grips	Lapierre tape
Stem	Lapierre alloy, -7°, Ø: 31.8mm, L: 80mm (XS/S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, L: 350mm
Saddle	Selle Italia Model X Superflow 145mm
Front hub	Shimano RS300 32H
Rear hub	Shimano FHRS300 32H
Rims	Ryde ZAC2000 622x19c double wall 32H
Tires	Continental Ultra Sport 3 SL 700x28
Pedals	VP-335 Clips&Strap

Frame	Sensium Disc Supreme 5 alloy smooth weldings
Fork	Sensium Disc carbon / alloy steerer
Front derailleur	Shimano Tiagra FD-R4700BM
Rear derailleur	Shimano Tiagra RD-R4700-GS, 10s
Crankset	Shimano Tiagra FC-R4700, 50-34T 170mm (XS/S) / 172.5mm (M/L) / 175mm (XL/XXL)
Bottom bracket	Shimano BSA
Sprocket	Shimano HG500 11-34T 10s
Chain	Shimano HG54 10s
Rotors	Shimano SM-RT70 160mm / 140mm Centerlock
Shiftlevers	Shimano Tiagra BR4720 2x10s flat mount without Fin
Headset	FSA NO.9M/TH 1-1/8", 36°/36° ACB
Handlebar	Lapierre alloy, Width: 400mm (XS/S), 420mm (M/L/XL), 440mm (XXL)
Grips	Lapierre tape
Stem	Lapierre alloy, -7°, Ø: 31.8mm, L: 80mm (XS/S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, L: 350mm
Saddle	Selle Italia Model X Superflow 145mm
Front hub	Shimano MT200 32H Center Lock
Rear hub	Shimano FHRM35 32H Center Lock
Rims	Ryde DP19 622x19 32H
Tires	Continental Ultra Sport 3 SL 700x32
Pedals	VP-335 Clips&Strap

Techzone

SENSIUM




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

SENSIUM

Tire width max:

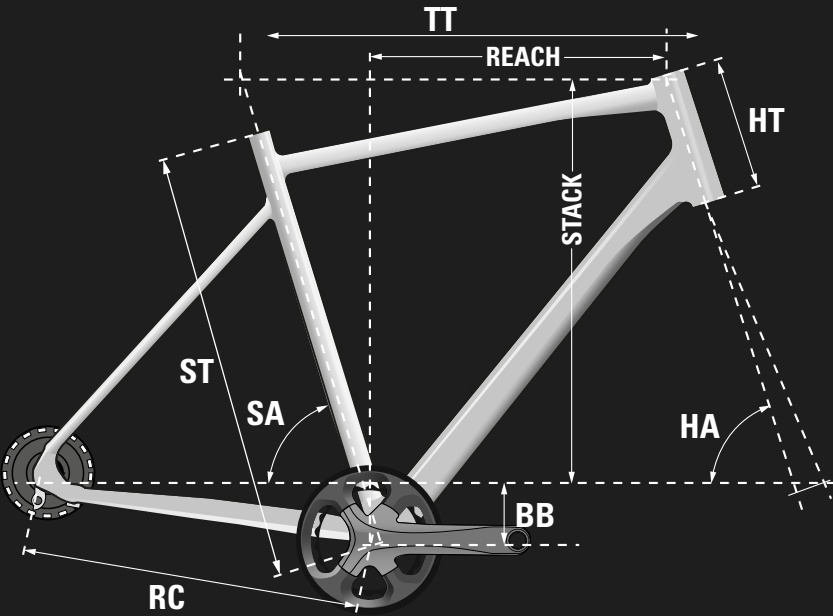

SIZE	XS	S	M	L	XL	XXL
ST (mm)	460	490	520	550	580	610
TT (mm)	520	532	547	565	585	600
HA (°)	71,5	72	72,5	73	73	73,5
SA (°)	74,5	74,5	74	73,5	73	73
RC (mm)	415	415	415	415	415	415
HT (mm)	125	145	165	185	205	220
BB (mm)	-67,5	-67,5	-67,5	-67,5	-67,5	-67,5
Reach	375	381	385	392	400	411
Stack	521	542	530	547	567	585
User	155-162	160-172	170-182	180 · 190	188 · 195	>195
Ref.	LS_P_460	LS_P_490	LS_P_520	LS_P_550	LS_P_580	LS_P_610

Pulsium

RANGE

EN A versatile bike concept suited to endurance cycling, sportives, as well as bikepacking.

DE Ein vielseitiger Allrounder für Touren, Endurance oder Bikepacking – gemacht für alle, die mehr erleben wollen.



**The Pulsium,
more than just an endurance road bike:**

- Ideal for occasional cyclists
- Comfortable frame
- Reliable components adapted for climbing

**Das Pulsium,
mehr als nur ein Endurance-Rennrad:**

- Ideal für Gelegenheitsfahrer:innen
- Komfortabler Rahmen für lange Tage im Sattel
- Zuverlässige, klettertaugliche Komponenten



MAINT

Pulsium 4.0

Circular Grey
LPSUA



ON

Pulsium 5.0

Crepuscule Blue
LPNTA



ON

Pulsium 7.0

Undergrowth Green
LPQTA



ON

Pulsium 7.0

Cloud Blue
LPQTB



ON

Pulsium 6.0

Septembre Beige
LPPTA



ON

Pulsium 6.0

Sensation Red
LPPTB



ON

Pulsium 8.0

Cumulonimbus Grey
LPRTA



MAINT

Pulsium 8.0 AXS

Fresh Mint Blue
LPTUA



MAINT

Pulsium 6.0 AXS

Gravity Grey
LPPUC

Pulsium 4.0

CIRCULAR GREY

Ref. LPSUA



Pulsium 5.0

CREPUSCULE BLUE

Ref. LPNTA



Frame	Pulsium Carbon UD SL
Fork	Pulsium Carbon UD SL
Front derailleur	Shimano CUES U6030 Brazed-on
Rear derailleur	Shimano CUES U6020 10s
Crankset	Shimano CUES FC-U6040, 50-34T 170mm (XS,S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Pressfit RS500 Road
Sprocket	Shimano CUES LG300 11-39T 10s
Chain	Shimano CUES LG500 9/10/11s
Rotors	Shimano SM-RT64 160mm Centerlock
Shiftlevers	Shimano CUES 6030 Road
Headset	Acros integrated
Handlebar	Lapierre alloy Bar, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre Tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre Alloy, Ø: 27.2mm, 350mm
Saddle	Prologo Akero R PAS Steel 150mm
Wheelset	Shimano WH-RS171
Tires	Continental Ultra Sport III 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano 105 R7100 Brazed-On
Rear derailleur	Shimano 105 R7100, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL700 160 / 140mm Centerlock
Shiftlevers	Shimano 105 ST-R7120
Headset	Acros integrated
Handlebar	Lapierre alloy, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Selle Italia Model X Superflow 145mm
Wheelset	Lapierre Road Alloy Disc (21mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental Ultra Sport III SL 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Pulsium 6.0

SEPTEMBRE BEIGE

Ref. LPPTA



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano 105 Di2 R7150 Brazed-On
Rear derailleur	Shimano 105 Di2 R7150, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL700 160 / 140mm Centerlock
Shiftlevers	Shimano 105 ST-R7170
Headset	Acros integrated
Handlebar	Lapierre alloy, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Fizik Aliante R5 150mm
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Pulsium 6.0

SENSATION RED

Ref. LPPTB



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano 105 Di2 R7150 Brazed-On
Rear derailleur	Shimano 105 Di2 R7150, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL700 160 / 140mm Centerlock
Shiftlevers	Shimano 105 ST-R7170
Headset	Acros integrated
Handlebar	Lapierre alloy, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Fizik Aliante R5 150mm
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Pulsium 6.0 AXS

GRAVITY GREY

Ref. LPPUC



Non-binding illustrations.

Frame	Pulsium Carbon UD SL
Fork	Pulsium Carbon UD SL
Front derailleur	SRAM Rival AXS Brazed-On
Rear derailleur	SRAM Rival AXS, 12s
Crankset	SRAM Rival 46-33T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1250 D1 10-36T 12s
Chain	SRAM Rival 12s
Rotors	SRAM Paceline 160mm / 140mm Centerlock
Shiftlevers	SRAM Rival AXS
Headset	Acros integrated
Handlebar	Lapierre alloy Bar, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre Alloy, Ø: 27.2mm, 350mm
Saddle	Prologo Akero R PAS T2.0 150mm
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, XD Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Pulsium 7.0

UNDERGROWTH GREEN

Ref. LPQTA



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano Ultegra Di2 R8150 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 50-34T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL800 160mm / 140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre alloy, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Fizik Aliante R5 150mm
Wheelset	DT Swiss E1600 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Pulsium 7.0

CLOUD BLUE

Ref. LPQTB



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano Ultegra Di2 R8150 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 50-34T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL800 160mm / 140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre alloy, Width: 380mm (XS), 400mm (S,M), 420mm (L,XL,XXL), Drop: 120mm, Reach: 70mm, Flare: 10°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre alloy, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Fizik Aliante R5 150mm
Wheelset	DT Swiss E1600 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Non-binding illustrations.

Pulsium 8.0

CUMULONIMBUS GREY

Ref. LPRTA



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano Ultegra Di2 R8150 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 50-34T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS,S), 90mm (M), 100mm (L), 110mm (XL), 120mm (XXL)
Seatpost	Lapierre Carbon, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Fizik Aliante R3 KIUM Rails
Wheelset	DT Swiss ERC1600 Spline 45mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental GP5000S TR Tubeless ready 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Pulsium 8.0 AXS

FRESH MINT BLUE

Ref. LPTUA



Frame	Pulsium Carbon UD SL
Fork	Pulsium Carbon UD SL
Front derailleur	SRAM Force AXS Brazed-On
Rear derailleur	SRAM Force AXS, 12s
Crankset	SRAM Force Powermeter 46-33T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1270 E1 10-36T 12s
Chain	SRAM Force 12s
Rotors	SRAM Paceline 160mm / 140mm Centerlock
Shiftlevers	SRAM Force AXS
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/90mm (M), 410mm/100mm (L), 410mm/110mm (XL) 410mm/120mm (XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Ø: 27.2mm, 0mm Offset, L: 350mm
Saddle	Prologo Scratch M5 PAS Tirox 140mm
Wheelset	DT Swiss ERC1600 Spline 45mm, Centerlock, AXDR
Tires	Continental GP 5000S TR 32-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Techzone

PULSIUM




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

PULSIUM

Tire width max:
38mm

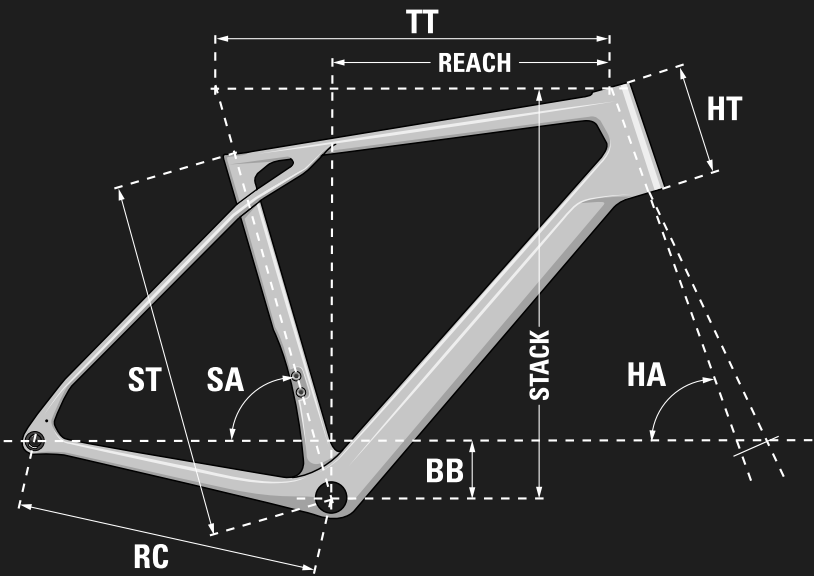

Size	XS	S	M	L	XL	XXL
ST (mm)	440	460	490	520	550	580
TT (mm)	521	529	545	561	577	595
HA (°)	71	71	71,5	72	72	72,5
SA (°)	74,5	74,5	74	73,5	73	72,5
RC DSC	415	415	415	415	415	415
HT (mm)	120	135	155	175	195	215
BB (mm)	72	72	72	69	69	67
Frk Length	378	378	378	378	378	378
Frk Offset	50	50	50	50	50	50
Stack	527	541	562	579	599	618
Reach	375	379	384	389	394	400
WB DSC	993	1002	1009	1017	1028	1036
User	153-160	158-165	164-175	174-185	184-195	>195
Ref.	LP___440	LP___460	LP___490	LP___520	LP___550	LP___580

Xelius DRS

RANGE

EN Designed for high speed & engineered to defy the laws of physics.

DE Gebaut für Tempo. Entwickelt, um die Gesetze der Physik herauszufordern.



**The Xelius DRS,
more than just a competition bike:**

- The Bike of the Picnic PostNL World Tour Team
- Patented 3D Tubular technology
- Advanced aerodynamics meticulously studied in wind tunnels

**Das Xelius DRS,
mehr als nur ein Wettkampfrad:**

- Das Bike des Picnic PostNL World Tour Teams
- Patentierte 3D Tubular-Technologie
- Aerodynamik auf höchstem Niveau – optimiert im Windkanal



ON

Xelius DRS 5.0

Crepuscule Blue
LXATA



MAINT

Xelius DRS 6.0 AXS

Gravity Grey
LXBUC



MAINT

Xelius DRS 8.0 AXS

Chrome
LXDUC



ON

Xelius DRS 9.0

Cold Rain Grey
LXETA



ON

Xelius DRS 6.0

Septembre Beige
LXBTA



ON

Xelius DRS 6.0

Sensation Red
LXBTB



MAINT

Xelius DRS 9.0

Midnight Plum Purple
LXEUB



MAINT

Xelius DRS 10.0

Paris Stone Beige
LXFUA



ON

Xelius DRS 7.0

Undergrowth Green
LXCTA



ON

Xelius DRS 7.0

Cumulonimbus Grey
LXCTB



MAINT

Xelius DRS 10.0

Cyber lime Green
LXFUB



MAINT

Xelius DRS 10.0 AXS

Tranlucent Hex Blue
LXGUA



ON

Xelius DRS 8.0

Paris Stone Beige
LXDTA



ON

Xelius DRS 8.0

Black
LXDTB



MAINT

Xelius DRS Frameset

Cold Rain Grey
LXKUA



ON

Xelius DRS Frameset

RAW Carbon
LXKTB

Xelius DRS 5.0

CREPUSCULE BLUE

Ref. LXATA



Xelius DRS 6.0 AXS

GRAVITY GREY

Ref. LXBUC



Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano 105 R7100 Brazed-On
Rear derailleur	Shimano 105 R7100, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	RT-CL700 160 / 140mm centerlock
Shiftlevers	Shimano 105 ST-R7120
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Selle Italia Model X Superflow 145mm
Wheelset	Lapierre Road Alloy Disc (21mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental Ultra Sport III 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	SRAM Rival AXS Brazed-On
Rear derailleur	SRAM Rival AXS, 12s
Crankset	SRAM Rival Dub 48-35T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1250 D1 10-36T 12s
Chain	SRAM Rival 12s
Rotors	SRAM Paceline 160mm / 140mm Centerlock
Shiftlevers	SRAM Rival AXS
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension Steel 143mm
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, Tubeless compatible, XD Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Xelius DRS 6.0

SEPTEMBRE BEIGE

Ref. LXBTA



Xelius DRS 6.0

SENSATION RED

Ref. LXBTB



Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano 105 Di2 R7150 Brazed-On
Rear derailleur	Shimano 105 Di2 R7150, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL700 160 / 140mm centerlock
Shiftlevers	Shimano 105 ST-R7170
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension STN rails
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano 105 Di2 R7150 Brazed-On
Rear derailleur	Shimano 105 Di2 R7150, 12s
Crankset	Shimano 105 R7100, 50-34T 165mm (XS), 170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB71-41B
Sprocket	Shimano 105 R7100 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL700 160 / 140mm centerlock
Shiftlevers	Shimano 105 ST-R7170
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension STN rails
Wheelset	DT Swiss E1800 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Xelius DRS 7.0

UNDERGROWTH GREEN

Ref. LXCTA



Xelius DRS 7.0

CUMULONIMBUS GREY

Ref. LXCTB



Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano Ultegra Di2 R8150 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL800 160mm /140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 rails
Wheelset	DT Swiss E1600 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano Ultegra Di2 R8150 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL800 160mm /140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre Carbon Aero, Width: 380mm (XS,S), 400mm (M), 420mm (L,XL,XXL), Drop: 130mm, Reach: 70mm, Flare: 5°
Grips	Lapierre tape
Stem	Lapierre alloy, semi-integrated routing, -10°, Ø: 31.8mm, 80mm (XS), 90mm (S), 100mm (M), 110mm (L), 120mm (XL,XXL)
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 rails
Wheelset	DT Swiss E1600 Spline 30mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Schwalbe One Perf, RaceGuard, MicroSkin, TLE 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo

Xelius DRS 8.0

PARIS STONE BEIGE

Ref. LXDTA



Xelius DRS 8.0

BLACK

Ref. LXDTB



Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano Ultegra Di2 R8150 Braze-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 rails
Wheelset	DT Swiss ERC1600 Spline 45mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano Ultegra Di2 R8150 Braze-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Ultegra R8100, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Ultegra R8101 11-34T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Ultegra ST-R8170
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 rails
Wheelset	DT Swiss ERC1600 Spline 45mm (22mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Xelius DRS 8.0 AXS

CHROME

Ref. LXDUC



Non-binding illustrations.

Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	SRAM Force AXS Brazed-On
Rear derailleur	SRAM Force AXS, 12s
Crankset	SRAM Force Powermeter 48-35T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1270 E1 10-33T 12s
Chain	SRAM Force 12s
Rotors	SRAM Paceline 160mm / 140mm Centerlock
Shiftlevers	SRAM Force AXS
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 143mm
Wheelset	DT Swiss ERC1600 Spline 45mm, Centerlock, XD Driver
Tires	Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Xelius DRS 9.0

COLD RAIN SILVER

Ref. LXETA



Frame	Carbon UD SLI
Fork	Carbon UD SLI
Front derailleur	Shimano Dura-Ace Di2 R9250 Brazed-On
Rear derailleur	Shimano Dura-Ace Di2 R9250 12s
Crankset	Shimano Dura-Ace R9200, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Dura-Ace R9200 11-34T 12s
Chain	Shimano CN-M9100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Dura-Ace ST-R9270
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 rails
Wheelset	DT Swiss ERC1400 Spline Front: 35mm / Rear: 45mm (22mm width), Centerlock, Tubeless compatible, HD Driver
Tires	Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Xelius DRS 9.0

MIDNIGHT PLUM PURPLE

Ref. LXEUB



Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	Shimano Dura-Ace Di2 R9250 Brazed-On
Rear derailleur	Shimano Dura-Ace Di2 R9250 12s
Crankset	Shimano Dura-Ace R9200, 52-36T 165mm (XS),170mm (S), 172,5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Dura-Ace R9200 11-34T 12s
Chain	Shimano M9100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Dura-Ace R9270
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension T4.0 143mm
Wheelset	DT Swiss ERC1400 Spline Front: 35mm / Rear: 45mm (22mm width), Centerlock, ASL11
Tires	Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Non-binding illustrations.

Xelius DRS 10.0

PARIS STONE BEIGE

Ref. LXFUA



Xelius DRS 10.0

CYBER LIME GREEN

Ref. LXFUB



Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	Shimano Dura-Ace Di2 R9250 Brazed-On
Rear derailleur	Shimano Dura-Ace Di2 R9250 12s
Crankset	Shimano Dura-Ace R9200 Powermeter , 52-36T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Dura-Ace R9200 11-34T 12s
Chain	Shimano M9100 12s
Rotors	Shimano RT-CL900 160mm / 140mm Centerlock
Shiftlevers	Shimano Dura-Ace R9270
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension R2 Nack 143mm
Wheelset	DT Swiss ARC1100 DICUT 38mm (20mm width), Centerlock, ASL11
Tires	Front : Continental Aero 111 26-622 Rear : Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	Shimano Dura-Ace Di2 R9250 Brazed-On
Rear derailleur	Shimano Dura-Ace Di2 R9250 12s
Crankset	Shimano Dura-Ace R9200 Powermeter , 52-36T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Dura-Ace R9200 11-34T 12s
Chain	Shimano M9100 12s
Rotors	Shimano RT-CL900 160mm /140mm Centerlock
Shiftlevers	Shimano Dura-Ace R9270
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension R2 Nack 143mm
Wheelset	DT Swiss ARC1100 DICUT 38mm (20mm width), Centerlock, ASL11
Tires	Front : Continental Aero 111 26-622 Rear : Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Xelius DRS 10.0 AXS

TRANSLUCENT HEX BLUE

Ref. LXGUA



Non-binding illustrations.

Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Front derailleur	SRAM RED AXS Brazed-On
Rear derailleur	SRAM RED AXS, 12s
Crankset	SRAM RED Powermeter 48-35T 165mm (XS),170mm (S), 172.5mm (M,L), 175mm (XL,XXL)
Bottom bracket	SRAM DUB Press Fit 86.5 Road
Sprocket	SRAM XG 1290 10-33T 12s
Chain	SRAM RED 12s
Rotors	SRAM Paceline X 160mm / 140mm Centerlock
Shiftlevers	SRAM RED AXS
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Saddle	Prologo Dimension R2 Nack 143mm
Wheelset	DT Swiss ARC1100 DICUT 38mm (20mm width), Centerlock, XDR
Tires	Front : Continental Aero 111 26-622 Rear : Continental GP 5000S TR 28-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Non-binding illustrations.

Xelius DRS Frameset

COLD RAIN GREY



Ref. L XKUA



Frame	Xelius DRS Carbon UD SLI
Fork	Xelius DRS Carbon UD SLI
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Grips	Lapierre tape
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Accessories	Thru axle multitool lever + GPS mount for Garmin & Wahoo adapter

Xelius DRS Frameset

RAW CARBON



Ref. L XKTb



Frame	Carbon UD SLI TEAM
Fork	Carbon UD SLI TEAM
Headset	Acros integrated
Handlebar	Lapierre Semi-integrated Combo UD carbon, -10°, 370mm/90mm (XS,S), 390mm/100mm (M), 410mm/110mm (L), 410mm/120mm (XL,XXL), Drop: 125mm, Reach: 72mm, Flare: 5°
Seatpost	Lapierre Carbon, Xelius DRS, 0mm Offset, L: 350mm (XS,S,M) 400mm (L,XL,XXL)
Accessories	Thru axle multitool lever + combo specific GPS Mount for Garmin & Wahoo

Non-binding illustrations.

Techzone

XELIUS DRS




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

XELIUS DRS

Tire width max:
32mm

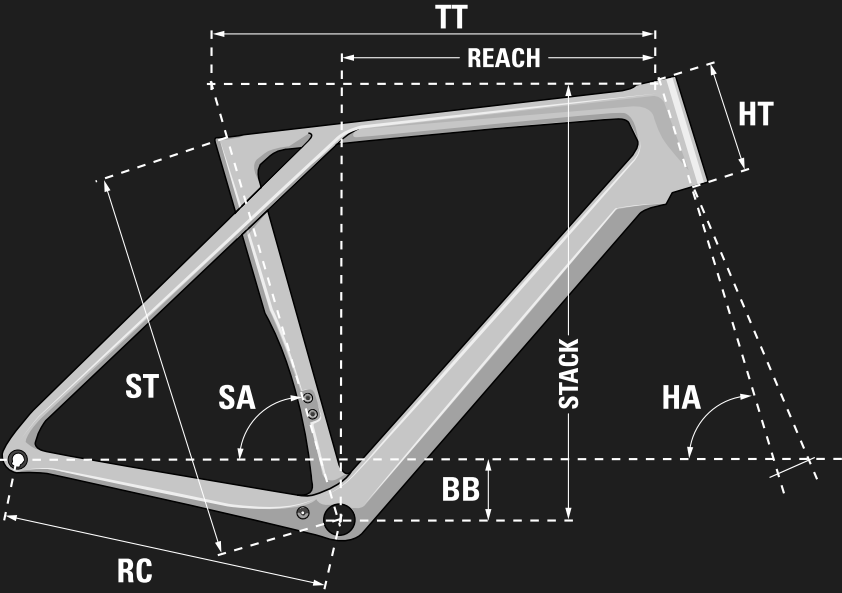

Size	XS	S	M	L	XL	XXL
ST (mm)	440	458	489	518	547	577
TT (mm)	520	531	547	568	587	605
HA (°)	72	72	73	73	74	74
SA (°)	74	74	74	73.5	73.5	73.5
RC (mm)	405	405	405	405	405	405
HT (mm)	105	120	140	160	180	200
BB (mm)	-67	-67	-67	-67	-67	-67
Frk Length (mm)	368	368	368	368	368	368
Frk Offset (mm)	50	50	50	50	50	50
Stack (mm)	501	516	538	557	580	599
Reach (mm)	376	383	393	403	415	428
WB (mm)	969	981	989	1005	1014	1032
User	155-162	160-172	170-182	180-192	190-200	>195
Ref.	LX___440	LX___460	LX___490	LX___520	LX___550	LX___580

Aerostorm DRS

RANGE

EN Once in the saddle, installed as if in a cockpit, with a low centre of gravity and an aggressive position, you can set out to beat your times.

DE Einmal im Sattel, sitzt du kompakt und aggressiv, mit tiefem Schwerpunkt – bereit, deine Zeiten zu schlagen.



The Aerostorm DRS,
much more than a time trial bike:

- Picnic PostNL's time trial bike
- Advanced engineering work in wind tunnel
- High-end components

Das Aerostorm DRS,
viel mehr als nur ein Zeitfahrrad:

- Das Zeitfahrrad des Picnic PostNL Teams
- Aerodynamisch entwickelt im Windkanal
- Hochwertige Komponenten für maximale Performance



Aerostorm DRS

Midnight Plum Purple
LFATA



Aerostorm DRS Frameset

RAW Carbon
LFKTA

Non-binding illustrations.

Aerostorm DRS

MIDNIGHT PLUM PURPLE

Ref. LFATA



Frame	Carbon UD SL
Fork	Carbon UD SL
Front derailleur	Shimano Dura-Ace Di2 R9250 Brazed-On
Rear derailleur	Shimano Ultegra Di2 R8150, 12s
Crankset	Shimano Dura-Ace R9200, 54-40T 170mm (S), 172.5mm (M,L), 175mm (XL)
Bottom bracket	Shimano Press Fit BB72-41B
Sprocket	Shimano Ultegra R8100 11-30T 12s
Chain	Shimano CN-M7100 12s
Rotors	Shimano MT900 160mm / 140mm Centerlock
Shiftlevers	Shimano Dura-Ace Di2 TT ST-R9180 + Shift Switch SW-R9160 for extensions
Headset	FSA 1"1/8 1"1/4 Orbit C-33 44E
Handlebar	Lapierre integrated TT cockpit UD carbon with carbon extensions, Width: 400mm (axle/axle), 70mm (S), 85mm (M), 100mm (L,XL)
Grips	Lapierre tape
Seatpost	Lapierre Aero TT carbon
Saddle	Prologo Dimension Tri Tirox rails
Wheelset	DT Swiss ARC1400 Dicut Front: 62mm / Rear: 80mm (20mm width), Centerlock, Tubeless compatible, HG Driver
Tires	Continental GP5000S TR Tubeless ready 25-622
Pedals	VP-335 Clips&Strap
Accessories	Thru axle multitool lever

Aerostorm DRS Frameset

RAW CARBON

Ref. LFKTA



Frame	Carbon UD SL
Fork	Carbon UD SL
Headset	FSA 1"1/8 1"1/4 Orbit C-33 44E
Handlebar	Lapierre integrated TT cockpit UD carbon with carbon extensions, Width: 400mm (axle/axle), 70mm (S), 85mm (M), 100mm (L,XL)
Grips	Lapierre tape
Seatpost	Lapierre Aero TT carbon
Accessories	Thru axle multitool lever

Non-binding illustrations.

Techzone

AEROSTORM DRS




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

AEROSTORM DRS

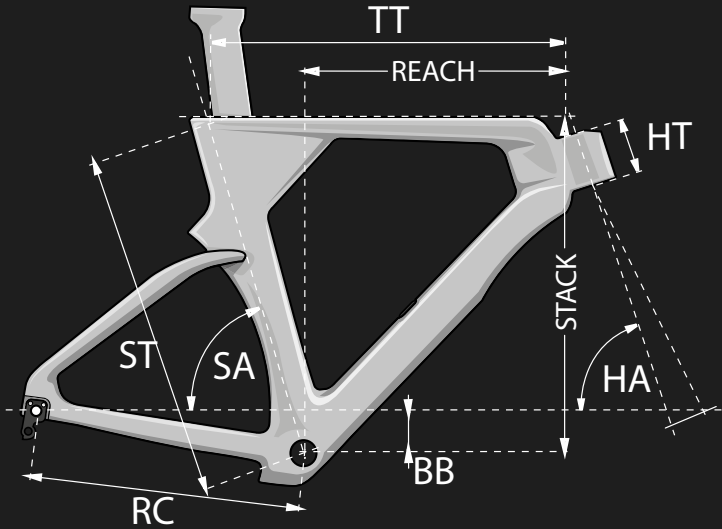

Size	S	M	L	XL
ST (MM)	490	510	550	580
TT (MM)	505	529	552	575
HA (°)	72	72	72	72
SA (°)	75	75	75	75
RC (MM)	405	405	405	405
HT (MM)	72	102	133	165
BB (MM)	-68	-68	-68	-68
REACH	380	395	410	425
STACK	470	500	530	560
User	150-170	168-178	176-186	>184
Ref.	LF_TA490	LF_TA510	LF_TA550	LF_TA580

RANGE MY26

Lifestyle Bikes

EN Race through the city or explore every path that comes your way.
Be an athlete of everyday life.

DE Fahr durch die Stadt oder entdecke neue Pfade. Sei ein:e Athlet:in des Alltags.



	XS	S	M	L	XL	XXL
E-EXPLORER Low	-	156-174	172-182	180-196	-	-

Lifestyle Bikes

RANGE OVERVIEW

E-Explorer


8.



7.



6.



5.



4.

3.

E-Explorer

RANGE

EN Your companion for your everyday trips: work, shopping and essential routine.

DE Dein Begleiter für den Alltag: ideal für Arbeit, Einkäufe und alle täglichen Wege.



The E-Explorer,
more than just an urban bike:

- Low step frame
- Reliable Bosch motor
- Equipment and accessories suitable for the city

Das E-Explorer,
mehr als nur ein Urban-Bike:

- Tiefer Einstieg für bequemes Auf- und Absteigen
- Zuverlässiger Bosch-Motor
- Ausstattung und Zubehör perfekt für die Stadt



MAINT

E-Explorer 5.5 Low

Graphite Grey | LLBUB
Bosch BES3 Perf | 525 Wh



MAINT

E-Explorer 6.5 Low

Gentle Lavender | LLCUB
Bosch Gen 5 Perf | 600 Wh



MAINT

E-Explorer 7.6 Low

Fresh Mint Green | LLDUB
Bosch Gen 5 PX | 600 Wh



MAINT

E-Explorer 8.8 Low

Paris Stone Beige | LLIUB
Bosch Gen 5 PX | 800 Wh

Non-binding illustrations.

E-Explorer 5.5 Low

GRAPHITE GREY

Ref. LLBUB



Frame	E-Explorer Low Step Alloy
Fork	SR Suntour XCM34 15x110 27.5" 100mm travel 44mm offset
Rear derailleur	Shimano CUES 3020 9s
Crankset	XLC by Miranda Crius 160mm + XLC CR-E15 Chainring 38T + XLC Bashring CR-X10
System	Bosch Performance line, 75 Nm, 600 W / Powertube 540Wh / Intuvia 100
Sprocket	Shimano CUES LG300 11-36T 9s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Tektro TR203-35A 203mm
Shiftlevers	Shimano CUES U4000 9s
Headset	Canecreek ZS44 Viscoset, Black Anodized, 1.1/8"-1.5"
Handlebar	XLC Alloy HB-M32, Width: 740mm, Rise: 25mm, Backsweep : 15°, Ø: 31.8mm
Grips	XLC GR-T70 Sport Ergo grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 50mm (S), 60mm (M,L), 70mm (XL)
Seatpost	XLC SP-R30 Ø: 34.9mm, L: 350mm
Saddle	XLC SA-S11 Sport Comfort Steel Rail 155mm
Front hub	XLC HF-M15, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M15, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M37 32H, 30-584
Tires	XLC Tourak 60-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Front light : AXA NXT 30 + Rear Light : AXA JUNO + Fenders : Curana Apollo Aluminium Matt Black + Carrier : Lapierre Aluminium MIK HD Ready 25Kg + Lapierre Thru axle and bottle opener lever

E-Explorer 6.5 Low

GENTLE LAVENDER

Ref. LLCUB



Frame	E-Explorer Low Step Alloy
Fork	SR Suntour XCM32 15x110 27.5" 100mm travel 44mm offset
Rear derailleur	Shimano CUES 3020 9s
Crankset	XLC by Miranda Crius 160mm + XLC CR-E15 Chainring 38T + XLC Bashring CR-X10
System	Bosch Performance line PX, 90 Nm, 700 W / Powertube 540Wh / Intuvia 100
Sprocket	Shimano CUES LG300 11-36T 9s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Tektro TR203-35A 203mm
Shiftlevers	Shimano CUES U4000 9s
Headset	Canecreek ZS44 Viscoset, Black Anodized, 1.1/8"-1.5"
Handlebar	XLC Alloy HB-M32, Width: 740mm, Rise: 25mm, Backsweep : 15°, Ø: 31.8mm
Grips	XLC GR-T70 Sport Ergo grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 50mm (S), 60mm (M,L), 70mm (XL)
Seatpost	XLC SP-R30 Ø: 34.9mm, L: 350mm
Saddle	XLC SA-S11 Sport Comfort Steel Rail 155mm
Front hub	XLC HF-M15, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M15, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M37 32H, 30-584
Tires	XLC Tourak 60-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Front light : AXA NXT 30 + Rear Light : AXA JUNO + Fenders : Curana Apollo Aluminium Matt Black + Carrier : Lapierre Aluminium MIK HD Ready 25Kg + Lapierre Thru axle and bottle opener lever

Non-binding illustrations.

E-Explorer 7.6 Low

FRESH MINT GREEN

Ref. LLDUB



Non-binding illustrations.

E-Explorer 8.8 Low

PARIS STONE BEIGE

Ref. LLIUB



Non-binding illustrations.

Frame	E-Explorer Low Step Alloy
Fork	SR Suntour Mobie 34 15x110 27.5" 100mm travel 44mm offset
Rear derailleur	Shimano CUES 6000 10/11s
Crankset	XLC by Miranda Crius 160mm + XLC Chainring 38T
System	Bosch Performance line PX, 90 Nm, 700 W / Powertube 600Wh / Intuvia 100
Sprocket	Shimano CUES LG300 11-48T 10s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Tektro HD-M280
Rotors	Tektro TR203-35A 203mm
Shiftlevers	Shimano CUES U6000 10s
Headset	Canecreek ZS44 Viscoset, Black Anodized, 1.1/8"-1.5"
Handlebar	XLC Alloy HB-M32, Width: 740mm, Rise: 25mm, Backsweep : 15°, Ø: 31.8mm
Grips	XLC GR-T70 Sport Ergo grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 50mm (S), 60mm (M,L), 70mm (XL)
Seatpost	Alloy Ø: 34.9mm L: 350mm (S,M), 400mm (L,XL)
Saddle	XLC SA-S11 Sport Comfort Steel Rail 155mm
Front hub	XLC HF-M15, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M15, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M37 32H, 30-584
Tires	Schwalbe Johnny Watts Perf, DD, RaceGuard 60-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Front light : AXA LS 800 Hammer 60 + Rear Light : AXA JUNO + Fenders : Curana Apollo Aluminium Matt Black + Carrier : Lapierre Aluminium MIK HD Ready 25Kg + Lapierre Thru axle and bottle opener lever

Frame	E-Explorer Low Step Alloy
Fork	SR Suntour Mobie 34 15x110 27.5" 100mm travel 44mm offset
Rear derailleur	Shimano CUES 6000 10/11s
Crankset	XLC by Miranda Crius 160mm + XLC Chainring 38T
System	Bosch Performance line PX, 90 Nm, 700 W / Powertube 800Wh / Kiox 300
Sprocket	Shimano CUES LG400 11-50T 11s
Chain	KMC eGlide EPT 9/10/11s
Brakes	Shimano M4100 2 pistons
Rotors	Shimano SM-RT30 203mm
Shiftlevers	Shimano CUES U6000 11s
Headset	Canecreek ZS44 Viscoset, Black Anodized, 1.1/8"-1.5"
Handlebar	XLC Alloy HB-M32, Width: 740mm, Rise: 25mm, Backsweep : 15°, Ø: 31.8mm
Grips	XLC GR-T70 Sport Ergo grips
Stem	XLC alloy ST-M34, +/-7°, Ø: 31.8mm, L: 50mm (S), 60mm (M,L), 70mm (XL)
Seatpost	Limotec D3 suspended, Ø: 34.9mm, travel 75mm + XLC SP-X23 Remote lever
Saddle	XLC SA-S11 Sport Comfort Steel Rail 155mm
Front hub	XLC HF-M15, boost 15x110, 32H Centerlock
Rear hub	XLC HR-M15, boost 12x148, 32H Centerlock, HG
Rims	XLC WR-M37 32H, 30-584
Tires	Schwalbe Johnny Watts Perf, DD, RaceGuard 60-584
Pedals	XLC by VP PD-M29
Accessories	Bosch Charger 4A + Front light : AXA LS 830 Hammer 80 + Rear Light : AXA JUNO + Fenders : Curana Apollo Aluminium Matt Black + Carrier : Lapierre Aluminium MIK HD Ready 25Kg + Lapierre Thru axle and bottle opener lever

Techzone

E-EXPLORER




Find more details
on the Accell service portal
in Accentry.

service.accentry.com

Geometry

E-EXPLORER LOW

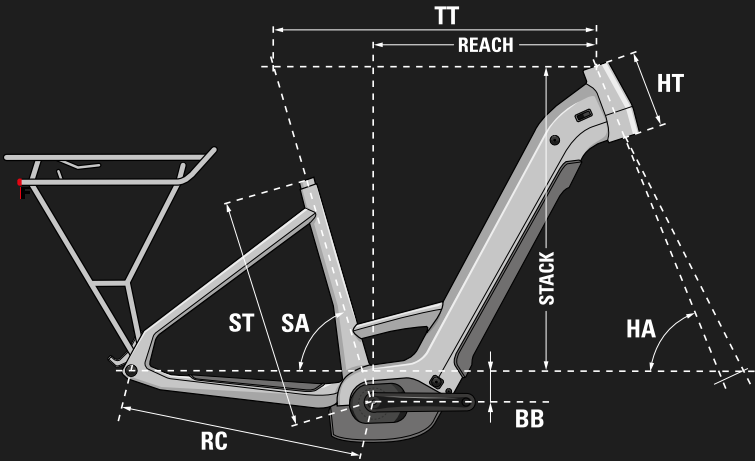

Size	S	M	L
ST [mm]	380	450	500
SA [°]	73	73	73
HT [mm]	150	155	175
HA [°]	68	68	68
TT [mm]	610	630	660
CS [mm]	475	475	475
BB drop [mm]	-65	-60	-60
Fork + Headset [mm]	503	503	503
Fork rake [mm]	44	44	44
WB [mm]	1166	1189	1220
Stack [mm]	654	654	672
Reach [mm]	410	430	455
User	156-174	172-182	180-196
Ref.	LL_UB380	LL_UB450	LL_UB500

Annex

EN A multitude of essential information.

DE Alles Wichtige auf einen Blick.



Contacts

🏠 Reception

+33 (0)3 80 52 51 86

• Monday to Friday
9am - 12am • 2pm - 5pm

🏠 Accounting

03 80 52 17 68

• Monday to Friday
9am - 12am • 2pm - 5pm

🛒 French Sales

Julie - François-Elie - Arnaud

+33 (0) 3 80 52 69 03

serviceclient@acell-group.com

• Monday to Friday
9am - 12am • 2pm - 5pm

🛒 Export Sales

Laure

salesexport@acell-group.com

• Monday to Friday
9am - 12am • 2pm - 5pm

⚙️ French After Sales

Lionel – Marius – Jérémy – Florian

03 80 52 09 10

sav-lapierre@lapierrebikes.com

• Monday to Friday
9am - 12am • 2pm - 5pm

⚙️ Europe After Sales

Lauren

warranty@lapierrebikes.com

• Monday to Friday
9am - 12am • 2pm - 5pm

⚙️ Parts & Accessories

Loic

03 80 52 09 09

commandespieces@cycles-lapierre.fr

• Monday to Friday
9am - 12am • 2pm - 5pm



Distributors

France CYCLES LAPIERRE
Rue Edmond Voisenet - BP 50573 - 21005 Dijon Cedex
www.lapierrebikes.com

Allemagne • Germany LAPIERRE DEUTSCHLAND
sales@lapierre-bikes.de

Andorre • Andorra BIKESELIT
www.bikeselit.com Bikeselit@bikeselit.com

Australie • Australia SRS AGENCIES
andrew@srsagencies.com.au

Autriche • Austria LAPIERRE AUSTRIA
info@accell.de

Belgique • Belgium LAPIERRE BELGIQUE
sales@accell.nl

Chili • Chile VIDAURRE BIKES
www.vidaurrebikes.cl vidaurrebikes@gmail.com

Chine • China GOLDENWHEEL GROUP
www.lapierrebikes.com.cn imp@goldenwheelgroup.com

Chypre • Cyprus CYCLE LOVE LTD
www.cycle-love.com info@cycle-love.com

Colombie • Colombia CICLO CROSS
www.ciclocross.com.co ciclocross@hotmail.com

Corée du Sud • South Korea EXO Co. Ltd.
www.exo.kr sjs123@exo.kr

Costa Rica • Costa Rica PURO MTB
www.puromtb.com info@puromtb.com

Dom-Tom • Overseas Territories CYCLES LAPIERRE
www.lapierrebikes.com

Espagne • Spain LAPIERRE ESPAÑA
www.lapierrebikes.es
Contact Lapierre : m.martinez@lapierrebikes.com

Equateur • Ecuador BIKE LAB
Contact Lapierre : bikelab2020@gmail.com

Finlande • Finland TUNTURI
www.tunturi.com feedback@tunturi.com

Honduras BIKE MART-FERRETERIA EL MAESTRO
www.bikemarthn.com info@bikemarthn.com

Hongrie • Hungary
SCHINDLER www.schindler.cz info@schindler.cz

Inde • India NAREN INTERNATIONAL – SUNCROSS BIKES
www.suncrossbikes.com sales@suncrossbikes.com

Indonésie • Indonesia PT BINTANG TIMUR
sales@bintang-timur.com

Irlande • Ireland CARA TRADE Ltd.
www.caratrade.com orders@caratrade.com

Israël • Israel BESHVIL HAOFANIM LTD
giantghostbikes@gmail.com

Italie • Italia ACCELL SEU ITALIA Srl
www.lapierrebikes.com/it-it italia@accell-group.com
Japon • Japan AZUMA Co. Ltd.
www.eastwood.co.jp info@eastwood.co.jp

Malaisie / Singapour • Malaysia / Singapore
TBFS CYCLE SDN BHD
https://tbfs-cycle.business.site/ amy@tbfooksang.com

Norvège • Norway DELER
www.deler.no post@deler.no

Nlle Zélande • New Zealand
ADVANCE TRADERS NZ LIMITED
sales@advancetraders.co.nz

Pays-Bas • Netherlands LAPIERRE PAYS-BAS
sales@accell.nl

Pérou • Peru EUROBIKE.PE
info@eurobikes.pe

Philippines NEWTON MULTI SALES
https://newtonmultisales.wixsite.com/newtonmultisales
NewtonMultiSales@gmail.com

Pologne • Poland LAPIERRE POLAND
info@accell.de

Portugal CICLO COIMBRÕES
Contact Lapierre : geral@ciclocoimbroes.com

Republique Tchèque • Czech Republic
SCHINDLER www.schindler.cz info@schindler.cz

Roumanie • Romania SPORTMANIA
www.bike-mania.ro info@bike-mania.ro

Royaume-Uni • United Kingdom RALEIGH UK
www.raleigh.co.uk sales@raleigh.co.uk

Russie • Russia BIKE PRODUCTS COMPANY
www.bikeproducts.ru info@bikeproducts.ru

Slovaquie • Slovakia
SCHINDLER www.schindler.cz info@schindler.cz

Slovénie • Slovenia A2U
www.a2u.si info.sencur@a2u.si

Suède • Sweden TUNTURI SWEDEN AB
www.Accell-nordic.se info@tunturi.se

Suisse • Switzerland LAPIERRE SUISSE
info@accell-suisse.com

Taïwan • Taiwan MARECHAL INTERNATIONAL Co. Ltd.
www.marechal.com.tw asia@marechal.com.tw

Thaïlande • Thailand TEAM BIKE Co. Ltd.
www.teambike.co.th marketingteambike@gmail.com
neomusha@hotmail.com

Turquie • Turkey ACCELL BISIKLET SAN. VE TIC. A.S.
www.accellbisiklet.com.tr info@accellbisiklet.com.tr

Ukraine SPORT SUMMIT
www.sportsummit.com.ua aleks@sportsummit.com.ua




Service Portal


on **accentry**

A place made for the dealers
where you can find plenty of
informations :


- Documents
- Dashboard
- Exploded View
- E-Learning

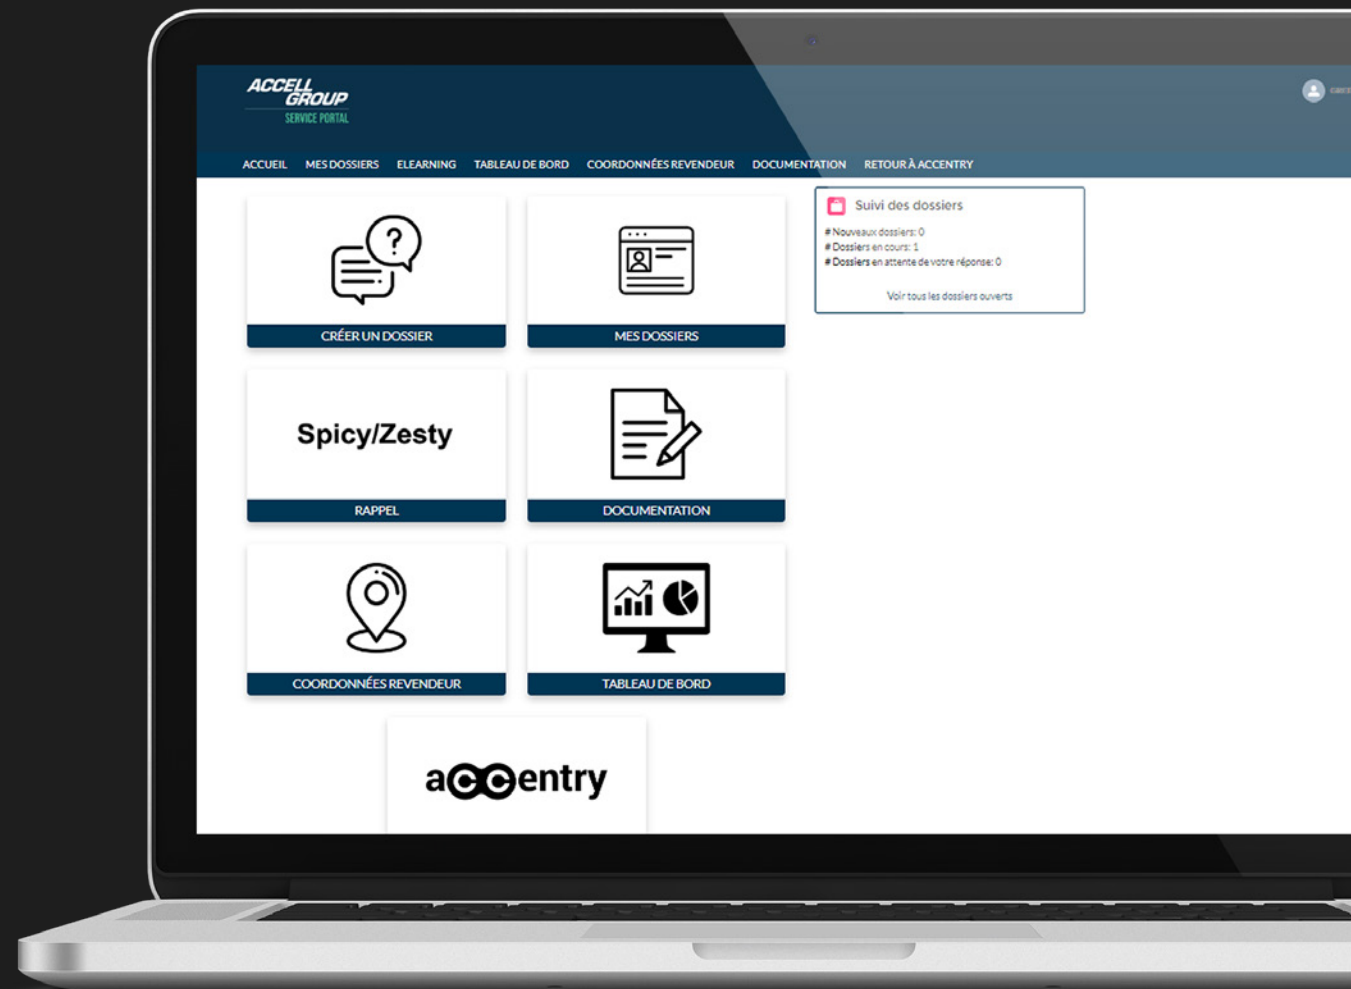

Discover it on



service.accentry.com

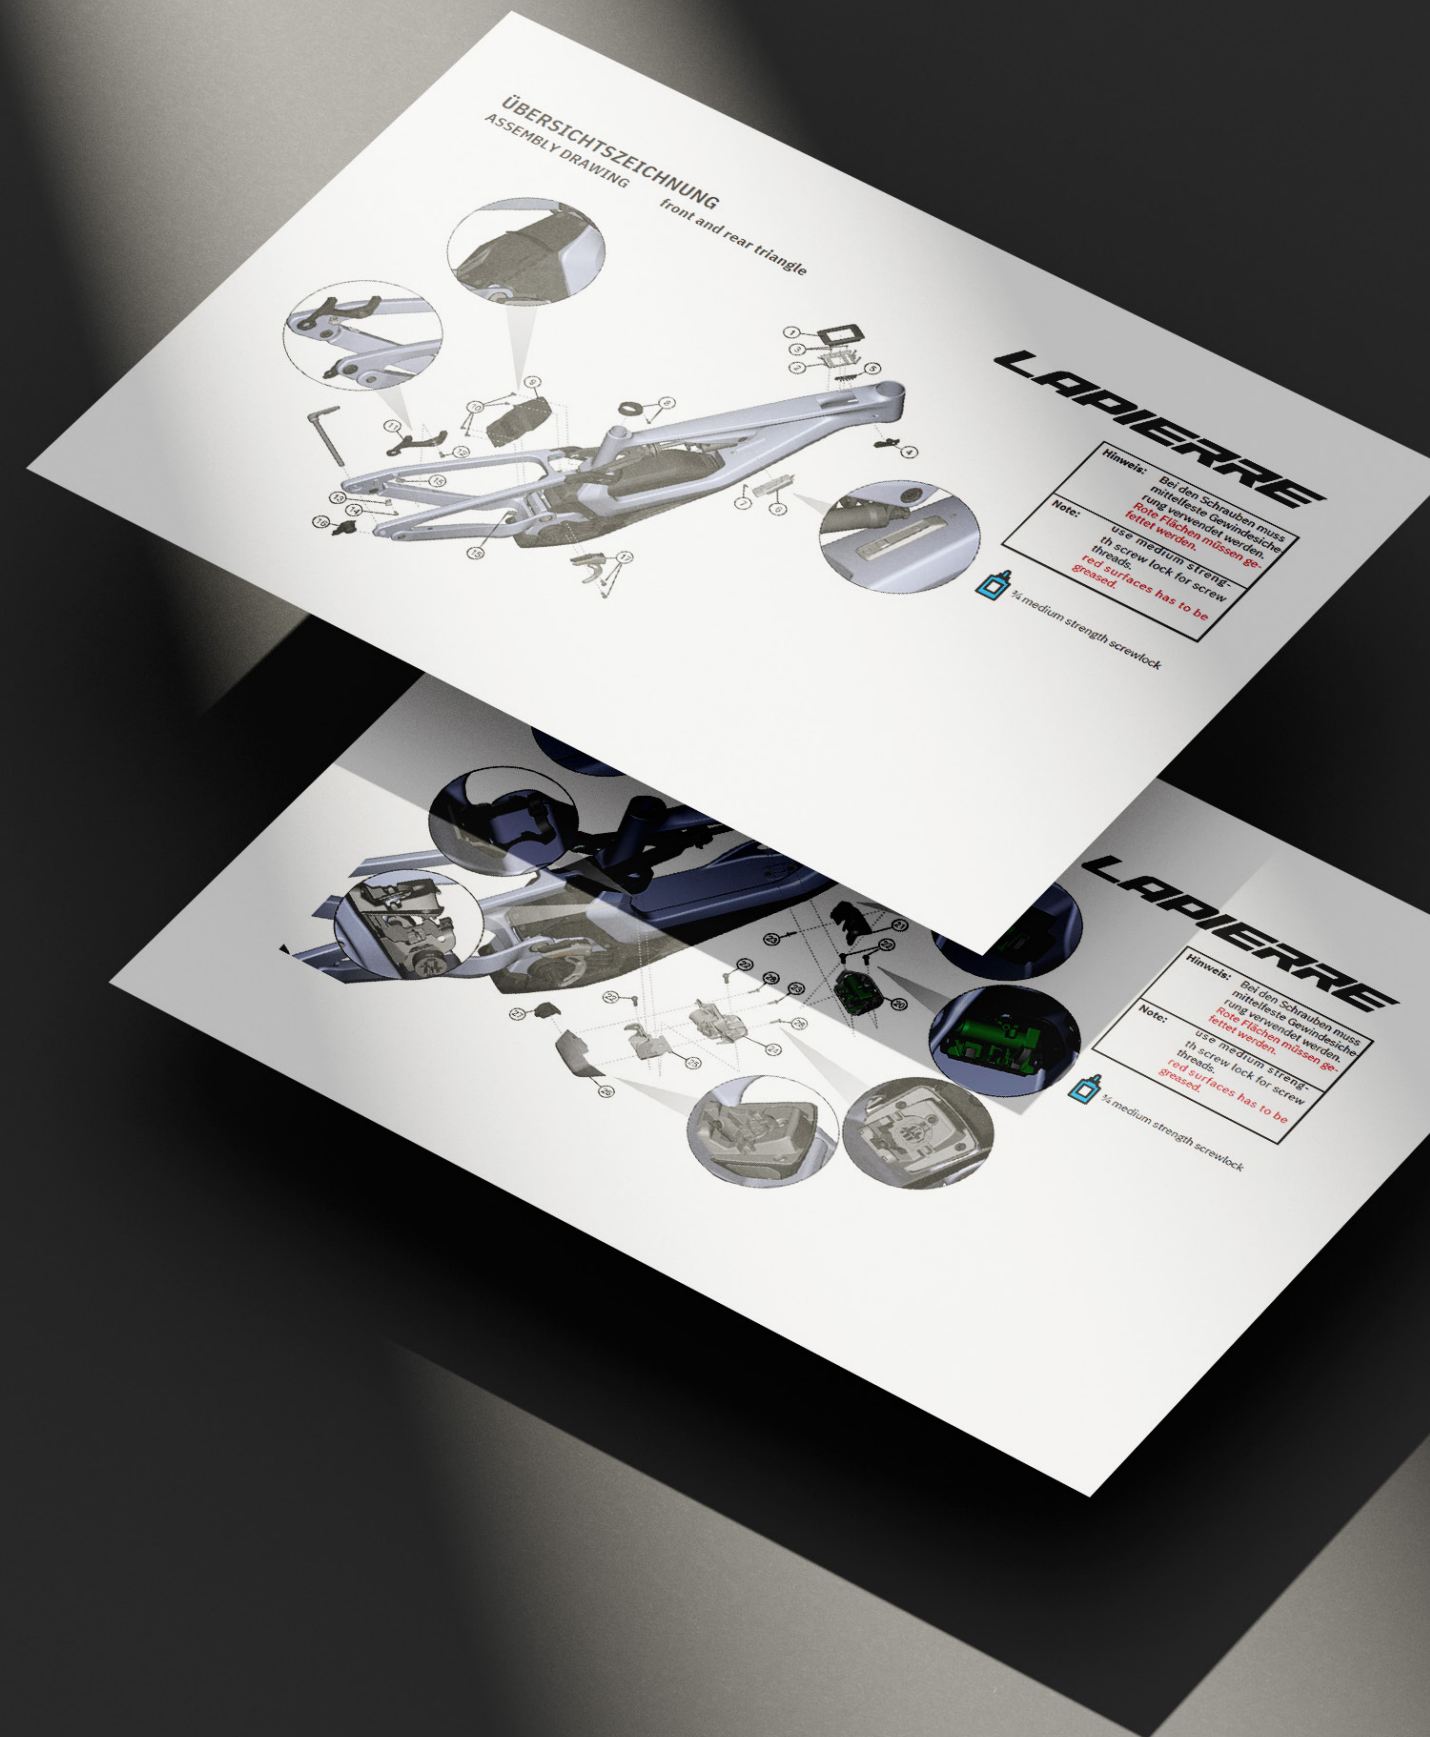

Accessories




XLC ACCESSORIES | Bags

2501701010	XLC Drybag BA-W43	black, waterproof, 17x45 cm, 7,5ltr	
2501700010	XLC Frame Bag BA-G01	black, 3 litres, size S	
2501700011	XLC Frame Bag BA-G01	black, 3.4 litres, size M	
2501700012	XLC Frame Bag BA-G01	black, 4.5 litres, size L	
2501700020	XLC Saddle Bag BA-G02	black/green, approx. 15 litres	
2501700030	XLC Top Tube Bag BA-G03	black, approx. 1 litre, waterproof, size S	
2501700031	XLC Top Tube Bag BA-G03	black, approx. 1.25 litres, waterproof, size M	
2501717500	XLC Hip Bag BA-H01	black/green, 27x21x8 cm, 3,6 ltr	
2501700003	XLC Hydration Bladder BA-X30	transparent, 1,3 L 23,5/26,0x17,0 cm	

2500601410	XLC Anycage LR-F04		
------------	--------------------	--	---

XLC ACCESSORIES | Bikes Racks

2503311002	XLC Bike Rack Almada Work-E VC-C07	for 2 E-Bikes, foldable	
2339000089	XLC Low Step Frame Adapter CC-X61	for XLC Almada Bike Rack	
2339000088	XLC Access Ramp CC-X58	for XLC Almada Bike Rack	

XLC ACCESSORIES | Bottles + Bottlecages

2503231980	XLC Bottle WB-K17 550 ml black/transparent	
2503231981	XLC Bottle WB-K17 550 ml transparent	
2503231985	XLC Bottle WB-K17 750 ml black/transparent	
2503231986	XLC Bottle WB-K17 750 ml transparent	

2503205500	XLC Bottlecage Rail BC-X09	black/green, 27x21x8 cm, 3,6 ltr	
------------	----------------------------	----------------------------------	---

Accessories



XLC ACCESSORIES | Tools

2503615980	XLC Trailtool Solution (TTS) Set TO-M23
2503615982	XLC Trailtool Solution (TTS) Carrier Tube TO-M23T
2503615983	XLC Trailtool Solution (TTS) Mini-tool TO-M23M



XLC ACCESSORIES | LIGHTS

2500218966	XLC Light Set 'Proxima Pro Plus' CL-S25+
------------	--



XLC ACCESSORIES | PUMPS

2501955510	XLC Floorpump digital PU-S06
------------	------------------------------



2501922800	XLC Digital Pump PU-H04
------------	-------------------------



Couldn't find what you're looking for?

Please visit our website to view the extensive range of spare parts and accessories and to find out more about our products.
shop.accentry.com/login

For complaints please use the new Accell service portal in Accentry.
service.accentry.com



EINSATZBEREICHE // RANGE OF USE


Jedes Fahrrad wurde für einen bestimmten Gebrauch beziehungsweise Einsatzbereich entwickelt und gebaut. Dieser Abschnitt erklärt diese Einsatzbereiche und gibt Auskunft über das maximal zulässige Gesamtgewicht bzw. Fahrer:innengewicht.

Each bicycle is designed for a specific range of use. This section explains those ranges and the weight limits.

Das **Gesamtgewicht** setzt sich zusammen aus dem Gewicht des Fahrrads, des:der fahrfertig bekleideten Fahrenden und des Gepäcks.

The **total weight** equals the weight of the bicycle plus fully geared rider plus luggage.

MAXIMAL ZULÄSSIGES GESAMTGEWICHT //
MAX. ALLOWED TOTAL WEIGHT

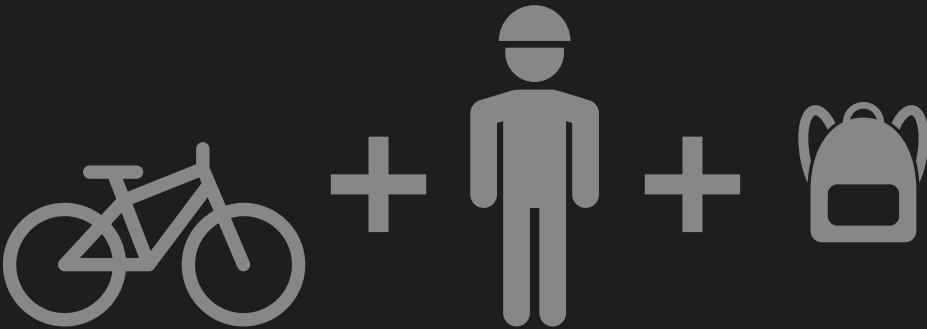

ACHTUNG

Fahrräder sind stets entsprechend ihrem zugelassenen Einsatzbereich zu verwenden. Wird ein Fahrrad höheren Belastungen ausgesetzt, als von uns in der jeweiligen Kategorie empfohlen, kann das zu Beschädigungen des Materials und sogar zum Bruch führen. Ein beschädigtes Fahrrad kann unkontrollierbar werden und dadurch schwere Stürze verursachen.

WARNING

Bikes always have to be used within and according to their range of use. If a bike is exposed to more stress than intended in its specific range of use, the bicycle and/or its parts may be damaged or break. A damaged or broken bike may be difficult or impossible to control and may cause severe crashes.

Beachten Sie auch die Betriebsanleitung des jeweiligen Fahrrads.

Always pay attention to the operating manual of the respective bicycle as well.

MODEL CODE	MODELL // MODEL	KATEGORIE EINSATZBEREICH // RANGE OF USE CATEGORY	MAX. ZULÄSSIGES GESAMTGEWICHT // MAX. ALLOWED TOTAL WEIGHT
LFATA	AEROSTORM DRS	6	110
LFKTA	AEROSTORM DRS FRAMESET	6	110
LCAUA	CROSSHILL AL 2.0	2	110
LCBUA	CROSSHILL AL 3.0	2	110
LCCUA	CROSSHILL AL 4.0	2	110
LCEUA	CROSSHILL CF 5.0	2	110
LCFUA	CROSSHILL CF 6.0	2	110
LCGTA	CROSSHILL CF 7.0	2	110
LCHUA	CROSSHILL CF 8.0	2	110
LCJUA	CROSSHILL CF 9.0	2	110
LLBUB	E-EXPLORER 5.5 LOW	2	130
LLCUB	E-EXPLORER 6.5 LOW	2	130
LLDUB	E-EXPLORER 7.6 LOW	2	130
LLIUB	E-EXPLORER 8.8 LOW	2	130
LOOTA	OVERVOLT AM AL 5.8	4	120
LOPUA	OVERVOLT AM AL 7.8	4	120
LOQUA	OVERVOLT AM AL 9.8	4	120
LORUA	OVERVOLT AM CF 6.8	4	120
LOSUA	OVERVOLT AM CF 7.8	4	120
LOTUA	OVERVOLT AM CF 10.8	4	120
LOCUA	OVERVOLT HT 5.6 HIGH	3	120
LODTA	OVERVOLT HT 6.6 HIGH	3	120
LOETA	OVERVOLT HT 8.8 HIGH	3	120
LOLTA	OVERVOLT TR 4.6	4	120
LOLTB	OVERVOLT TR 6.8	4	120
LOLUC	OVERVOLT TR 7.8	4	120
LPAUC	PRORACE 20 SL	2	60
LPAUD	PRORACE 20 SL	2	60
LPBUC	PRORACE 24 SL	2	60
LPBUD	PRORACE 24 SL	2	60
LPAUA	PRORACE 1.9	3	120
LPBUA	PRORACE 2.9	3	120
LPCUA	PRORACE 3.9	3	120
LPDUA	PRORACE 4.9	3	120
LPFUA	PRORACE CF 5.9	3	120
LPGUA	PRORACE CF 6.9	3	120
LPHUA	PRORACE CF 7.9	3	120
LPSUA	PULSIUM 4.0	2	110
LPNTA	PULSIUM 5.0	2	110
LPPTA	PULSIUM 6.0	2	110
LPPTB	PULSIUM 6.0	2	110
LPPUC	PULSIUM 6.0 AXS	2	110
LPQTA	PULSIUM 7.0	2	110

MODEL CODE	MODELL // MODEL	KATEGORIE EINSATZBEREICH // RANGE OF USE CATEGORY	MAX. ZULÄSSIGES GESAMTGEWICHT // MAX. ALLOWED TOTAL WEIGHT
LPQTB	PULSIUM 7.0	2	110
LPRTA	PULSIUM 8.0	2	110
LPTUA	PULSIUM 8.0 AXS	2	110
LSFPA	SENSIUM 1.0	6	110
LSGPA	SENSIUM 2.0	6	110
LSHPA	SENSIUM 3.0	6	110
LSHPB	SENSIUM 3.0 DISC	6	110
LSBUA	SPICY CF 6.9	5	120
LSCUA	SPICY CF 7.9	5	120
LSJUA	SPICY CF 8.9	5	120
LSDUA	SPICY CF TEAM	5	120
LXATA	XELIUS DRS 5.0	6	110
LXBTA	XELIUS DRS 6.0	6	110
LXBTB	XELIUS DRS 6.0	6	110
LXBTC	XELIUS DRS 6.0 AXS	6	110
LXBTA	XELIUS DRS 7.0	6	110
LXCTB	XELIUS DRS 7.0	6	110
LXDTA	XELIUS DRS 8.0	6	110
LXDTB	XELIUS DRS 8.0	6	110
LXDUC	XELIUS DRS 8.0 AXS	6	110
LXETA	XELIUS DRS 9.0	6	110
LXEUB	XELIUS DRS 9.0	6	110
LXFUA	XELIUS DRS 10.0	6	110
LXFUB	XELIUS DRS 10.0	6	110
LXGUA	XELIUS DRS 10.0 AXS	6	110
LXHTA	XELIUS DRS PICNIC POST NL	6	110
LXKUA	XELIUS DRS FRAMESET	6	110
LXKTB	XELIUS DRS FRAMESET	6	110
LRERA	XRM 6.9	4	120
LRBRB	XRM 7.9	4	120
LRFRA	XRM 8.9	4	120
LRITA	XRM 9.9	4	120
LRJTA	XRM 10.9	4	120
LZAPA	ZESTY TR 3.7	4	120
LZBPA	ZESTY TR 3.9	4	120
LZCNA	ZESTY TR 4.9	4	120
LZDPA	ZESTY TR 5.9	4	120
LZHUA	ZESTY CF 6.9	4	120
LZIUA	ZESTY CF 7.9	4	120
LZJUA	ZESTY CF 8.9	4	120
LZLUA	ZESTY CF 9.9	4	120
LZNUA	ZESTY CF 10.9	4	120

EINSATZBEREICHE

SYMBOL	FAHRZEUGKATEGORIE	NUTZUNG
	Fahrzeuge der Kategorie 0 sind in der Regel Kinderspielräder 12" und Kinderräder 12" und 16".	KATEGORIE 0: - Für Kinder ab 3 Jahren - Verwendung nur unter Aufsicht Erziehungsberechtigter - Teilnahme an dem Straßenverkehr ist nicht gestattet - Teilnahme an Wettkämpfen ist nicht gestattet - Nicht für Sprünge und akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 1 sind in der Regel Fahrräder, Pedelecs und S-Pedelecs des Typs Rennrad oder Fitness Bike (Urban Bike).	KATEGORIE 1: - Ausschließlich für asphaltierte, betonierte oder gepflasterte Straßen und Wege - Permanenter Bodenkontakt der Laufräder muss gewährleistet sein - Die Teilnahme an Wettkämpfen ist gestattet - Nicht für Drops, Sprünge und akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 2 sind in der Regel Fahrräder, Pedelecs und S-Pedelecs des Typs City-, Trekking-, Cross-Trekking- oder Lastenrad, außerdem Kinderräder 20" und Jugendräder 24".	KATEGORIE 2: - Beinhaltet Kategorie 1 sowie befestigte und naturfeste Wege mit moderaten Steigungen - Absätze von bis zu 15 cm, z. B. Bordsteinkanten, können hinuntergefahren werden - Die Teilnahme an Wettkämpfen ist nicht gestattet - Nicht für Sprünge und akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 2+ sind Gravel Bikes	KATEGORIE 2+: - Beinhaltet Kategorien 1, und 2 sowie befestigte und naturfeste Wege mit moderaten Steigungen - Drops und Sprünge bis zu einer Höhe von max. 30 cm sind zulässig (unter der Voraussetzung entsprechender Fahrtechnik) - Nicht für akrobatische Handlungen geeignet - Teilnahme an Wettkämpfen ist gestattet
	Fahrzeuge der Kategorie 3 sind in der Regel Fahrräder, Pedelecs und S-Pedelecs des Typs Mountainbike mit Einsatzzweck Cross Country, Marathon und Tour sowie Fahrräder aus den Bereichen Cyclo-Cross und All Track.	KATEGORIE 3: - Beinhaltet Kategorien 1 und 2 sowie raue Trails mit kleineren Hindernissen und unbefestigte Strecken, die eine gute Fahrtechnik erfordern - Die Teilnahme an Wettkämpfen ist gestattet - Drops und Sprünge bis zu einer Höhe von max. 60 cm sind zulässig (unter der Voraussetzung entsprechender Fahrtechnik) - Nicht für akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 4 sind in der Regel Fahrräder, Pedelecs und S-Pedelecs des Typs Mountainbike mit Einsatzzweck Allmountain.	KATEGORIE 4: - Beinhaltet Kategorien 1, 2 und 3 - Größere Hindernisse und höhere Geschwindigkeiten setzen gesteigertes fahrerisches Können voraus - Die Teilnahme an Wettkämpfen ist gestattet - Drops und Sprünge bis zu einer Höhe von max. 120 cm sind zulässig (unter der Voraussetzung entsprechender Fahrtechnik) - Nicht für akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 5 sind in der Regel Fahrräder, Pedelecs und S-Pedelecs des Typs Mountainbike mit Einsatzzweck Enduro/Freeride/Downhill.	KATEGORIE 5: - Beinhaltet Kategorien 1, 2, 3 und 4 sowie sehr schnell gefahrenes und sehr anspruchsvolles Gelände mit extremen Steigungen - Sehr hohe Ansprüche an das fahrerische Können - Die Teilnahme an Wettkämpfen ist gestattet - Weite Sprünge und Drops sind zulässig (unter der Voraussetzung entsprechender Fahrtechnik) - Nicht für akrobatische Handlungen geeignet
	Fahrzeuge der Kategorie 6 sind Rennräder	KATEGORIE 6: - Beinhaltet Kategorie 1 - Die Teilnahme an Wettkämpfen ist gestattet - Zugelassen für hohe Geschwindigkeiten über 50 km/h, z. B. bei Bergabfahrten sowie Sprints. - Nicht für akrobatische Handlungen geeignet

RANGE OF USE

SYMBOL	CYCLE CATEGORY	USE
	Category 0 cycles are generally 12" balance bikes and 12" or 16" children's bikes.	CATEGORY 0: - For children aged 3 years and up - Only for use under the supervision of a parent or guardian - Not permitted on the road - Not permitted in competitions - Not suitable for jumps or acrobatics
	Category 1 cycles are generally bikes, pedelecs and S-pedelecs in the style of racing bikes or fitness bikes (urban bikes).	CATEGORY 1: - Solely for asphalt, concrete or paved roads and paths - Wheels must be kept in permanent contact with the ground - Permitted in competitions - Not suitable for drops, jumps or acrobatics
	Category 2 cycles are generally bikes, pedelecs and S-pedelecs in the style of city, trekking, cross-trekking or cargo bikes, as well as 20" children's bikes and 24" junior bikes.	CATEGORY 2: - Includes category 1, plus surfaced and naturally firm paths with moderate inclines - Can be ridden down steps of up to 15 cm / 5.9", e.g. kerbs - Not permitted in competitions - Not suitable for jumps or acrobatics
	Category 2+ cycles are gravel bikes	CATEGORY 2+: - Includes categories 1, and 2, plus surfaced and naturally firm paths with moderate inclines - Drops and jumps permitted up to a max. height of 30 cm / 11.8" (with appropriate riding technique) - Not suitable for acrobatic maneuvers. - Permitted in competitions
	Category 3 cycles are generally bikes, pedelecs and S-pedelecs in the style of mountain bikes designed for cross-country, marathon and touring use, plus bikes in the cyclo-cross and all-track segments.	CATEGORY 3: - Includes categories 1 and 2, plus rough trails with small obstacles, and unsurfaced routes that require good riding technique - Permitted in competitions - Drops and jumps permitted up to a max. height of 60 cm / 23.6" (with appropriate riding technique) - Not suitable for acrobatics
	Category 4 cycles are generally bikes, pedelecs and S-pedelecs in the style of mountain bikes designed for all-mountain use.	CATEGORY 4: - Includes categories 1, 2 and 3 - Larger obstacles and higher speeds require increased riding skills - Permitted in competitions - Drops and jumps permitted up to a max. height of 120 cm / 47.2" (with appropriate riding technique) - Not suitable for acrobatics
	Category 5 cycles are generally bikes, pedelecs and S-pedelecs in the style of mountain bikes designed for enduro/freeride/downhill use.	CATEGORY 5: - Includes categories 1, 2, 3 and 4, plus very fast and very demanding terrain with extreme inclines - Very high demands on riding skill - Permitted in competitions - Long drops and jumps permitted (with appropriate riding technique) - Not suitable for acrobatics
	Category 6 cycles are road bikes	CATEGORY 6: - Includes category 1 - Participation in competitions is permitted - Permitted for high speeds over 50 km/h, e.g. when riding downhill and sprinting. - Not suitable for acrobatic acts

ALLGEMEINE GESCHÄFTSBEDINGUNGEN VON ACCELL

(FASSUNG 09.04.2024)

I. Geltungsbereich

- Die nachstehenden Verkaufsbedingungen gelten für alle zwischen dem Käufer und uns geschlossenen Verträge über die Lieferung von Waren. Sie gelten auch für alle künftigen Geschäftsbeziehungen, auch wenn sie nicht noch einmal ausdrücklich vereinbart werden. Sofern nichts anderes vereinbart wird, gelten die Verkaufsbedingungen in der zum Zeitpunkt der Bestellung des Käufers gültigen bzw. jedenfalls in der ihm zuletzt in Textform mitgeteilten Fassung als Rahmenvereinbarung auch für gleichartige künftige Verträge, ohne dass wir in jedem Einzelfall wieder auf sie hinweisen müssten.
- Abweichende, entgegenstehende oder ergänzende Bedingungen des Käufers, die wir nicht ausdrücklich anerkennen, sind für uns unverbindlich, auch wenn wir ihnen nicht ausdrücklich widersprechen. Die nachstehenden Verkaufsbedingungen gelten auch dann ausschließlich, wenn wir in Kenntnis entgegenstehender oder abweichender Bedingungen des Käufers die Bestellung des Käufers vorbehaltlos ausführen.
- Im Einzelfall getroffene, individuelle Vereinbarungen mit dem Käufer (einschließlich Nebenabreden, Ergänzungen und Änderungen) haben in jedem Fall Vorrang vor diesen Bedingungen. Für den Inhalt derartiger Vereinbarungen ist, vorbehaltlich des Gegenbeweises, ein schriftlicher Vertrag bzw. unsere schriftliche Bestätigung maßgebend.

II. Angebot, Vertragsschluss und Vertraulichkeit

- Eine Bestellung des Käufers, die als Angebot zum Abschluss eines Kaufvertrages zu qualifizieren ist, können wir innerhalb von zwei Wochen durch Übersendung einer Auftragsbestätigung oder durch Zusendung der bestellten Produkte innerhalb der gleichen Frist annehmen.
- Unsere Angebote sind freibleibend und unverbindlich, es sei denn, dass wir diese ausdrücklich als verbindlich bezeichnet haben.
- An allen Abbildungen, Kalkulationen, Zeichnungen sowie anderen Unterlagen behalten wir uns unsere Eigentums-, Urheber- sowie sonstige Schutzrechte vor. Der Käufer darf diese als solche oder inhaltlich nur mit unserer Einwilligung an Dritte weitergeben, sie Dritten zugänglich machen, sie selbst oder durch Dritte nutzen oder vervielfältigen, unabhängig davon, ob wir diese als vertraulich gekennzeichnet haben. Der Käufer hat auf unser Verlangen diese Gegenstände vollständig an uns zurückzugeben und eventuell gefertigte Kopien zu vernichten, wenn sie von ihm im ordnungsgemäßen Geschäftsgang nicht mehr benötigt werden oder wenn Verhandlungen nicht zum Abschluss eines Vertrages führen. Ausgenommen hiervon ist die Speicherung elektronisch zur Verfügung gestellter Daten zum Zwecke üblicher Datensicherung.

III. Zahlungsbedingungen

- Unsere Preise gelten, wenn in der Auftragsbestätigung nichts anderes festgelegt wurde, ab Werk ohne Verpackung und bei Exportlieferungen zuzüglich Zoll sowie Gebühren und anderer öffentlicher Abgaben. In unseren Preisen ist die gesetzliche Mehrwertsteuer nicht eingeschlossen. Diese werden wir in der gesetzlichen Höhe am Tage der Rechnungsstellung in der Rechnung gesondert ausweisen.
- Sofern wir bei einem Versandkauf (Vl. 1.) nicht die im Einzelfall tatsächlich entstandenen Transportkosten in Rechnung stellen, gilt eine Transportkostenpauschale (ausschließlich einer etwaigen Transportversicherung i.S.v. Vl.3). Die Höhe dieser Transportkostenpauschale kann der Käufer aus der jeweils gültigen Konditionsvereinbarung entnehmen.
- Bezüglich Rechnungen der Engelbert Wiener Bike Parts GmbH gilt, dass diese innerhalb von 10 Tagen ab Rechnungsdatum abzüglich 2% Skonto oder ohne Abzug innerhalb von 30 Tagen ab Rechnungsdatum und Lieferung der Ware zahlbar sind. Beträge unter Euro 25,- sind ohne jeden Abzug zahlbar. Bezüglich Rechnungen von allen anderen Gesellschaften der Accell Gruppe gilt, dass diese innerhalb von 10 Tagen ab Rechnungsdatum abzüglich 0,5% Skonto, bei Bankeinzug (SEPA) innerhalb von 10 Tagen ab Rechnungsdatum abzüglich weiterer 0,5% Skonto oder ohne Abzug innerhalb von 30 Tagen ab Rechnungsdatum und Lieferung der Ware zahlbar sind. In allen Fällen gilt: Skonto darf nur abgezogen werden, wenn alle Zahlungsverpflichtungen aus früheren Lieferungen restlos erfüllt sind. Wir sind auch im Rahmen einer laufenden Geschäftsbeziehung, jederzeit berechtigt, eine Lieferung ganz oder teilweise nur

gegen Vorkasse durchzuführen. Einen entsprechenden Vorbehalt erklären wir spätestens mit der Auftragsbestätigung. Maßgebend für das Datum der Zahlung ist der Eingang bei uns. Die Zahlung per Scheck ist ausgeschlossen, sofern sie nicht im Einzelfall gesondert vereinbart wird.

- Mit Ablauf vorstehender Zahlungsfrist kommt der Käufer in Verzug. Der Kaufpreis ist während des Verzugs zum jeweils geltenden gesetzlichen Verzugszinssatz zu verzinsen. Wir behalten uns die Geltendmachung eines weitergehenden Verzugsschadens vor. Gegenüber Kaufleuten bleibt unser Anspruch auf den kaufmännischen Fälligkeitszins (§ 353 HGB) unberührt.
- Dem Käufer stehen Aufrechnungs- oder Zurückbehaltungsrechte nur insoweit zu, als sein Anspruch rechtskräftig festgestellt oder unbestritten ist. Bei Mängeln der Lieferung bleiben die Gegenrechte des Käufers insbesondere gem. VII. 6. unberührt. Wir haben das Recht, Vorauszahlungen und Sicherheitsleistungen zu verlangen, wenn nach Abschluss des Vertrages Tatsachen bekannt werden, die die Zuverlässigkeit des Käufers, insbesondere dessen Zahlungsfähigkeit, in Frage stellen. Wir sind berechtigt, vom Vertrag zurückzutreten, wenn der Käufer falsche oder unvollständige Angaben über seine Kreditwürdigkeit bedingende Tatsachen gemacht hat. Ersatzansprüche des Käufers aus diesem Rücktritt sind ausgeschlossen. Unsere gesetzlichen Zurückbehaltungs- und Rücktrittsrechte bleiben unberührt.
- Soweit den vereinbarten Preisen Listenpreise zugrunde liegen und die Lieferung mehr als vier Monate nach Vertragsschluss erfolgen soll, gelten unsere bei Lieferung gültigen Listenpreise (jeweils abzüglich eines vereinbarten prozentualen oder festen Rabatts), ohne dass dem Käufer ein Rücktrittsrecht zusteht, es sei denn, dass zuvor etwas anderes vereinbart wurde. Kommt es zu einer Preiserhöhung von mehr als 5 %, steht dem Käufer ein Rücktrittsrecht zu.

IV. Liefer- und Leistungszeit

- Von uns in Aussicht gestellte Fristen und Termine für Lieferungen und Leistungen gelten stets nur annähernd, es sei denn, dass ausdrücklich eine feste Frist oder ein fester Termin zugesagt oder vereinbart ist. Sofern Versendung vereinbart wurde, beziehen sich Lieferfristen und Liefertermine auf den Zeitpunkt der Übergabe an den Spediteur, Frachtführer oder sonst mit dem Transport beauftragten Dritten. Der Käufer hat alle ihm obliegenden Verpflichtungen ordnungsgemäß und rechtzeitig zu erfüllen.
- Sofern wir verbindliche Lieferfristen aus Gründen, die wir nicht zu vertreten haben, nicht einhalten können (Nichtverfügbarkeit der Leistung), werden wir den Käufer hierüber unverzüglich informieren und gleichzeitig die voraussichtliche, neue Lieferfrist mitteilen. Ist die Leistung auch innerhalb der neuen Lieferfrist nicht verfügbar, sind wir berechtigt, ganz oder teilweise vom Vertrag zurückzutreten; eine bereits erbrachte Gegenleistung des Käufers werden wir unverzüglich erstatten. Als Fall der Nichtverfügbarkeit der Leistung in diesem Sinne gilt insbesondere die nicht rechtzeitige Selbstbelieferung durch unseren Zulieferer, wenn wir ein kongruentes Deckungsgeschäft abgeschlossen haben, weder uns noch unseren Zulieferer ein Verschulden trifft oder wir im Einzelfall zur Beschaffung nicht verpflichtet sind.
- Der Eintritt unseres Lieferverzugs bestimmt sich nach den gesetzlichen Vorschriften. In jedem Fall ist aber eine Mahnung durch den Käufer erforderlich. Bei Überschreiten eines unverbindlichen Liefertermins oder einer solchen Frist muss uns der Käufer zunächst auf-fordern, binnen einer Frist von mindestens sechs Wochen zu liefern; erst danach geraten wir in Verzug.
- Die Rechte des Käufers gemäß VIII. dieser Bedingungen und unsere gesetzlichen Rechte, insbesondere bei einem Ausschluss der Leistungspflicht (zB aufgrund Unmöglichkeit oder Unzumutbarkeit der Leistung und/oder Nacherfüllung), bleiben unberührt.
- Wir sind zu Teillieferungen und Teilleistungen jederzeit berechtigt, wenn
 - die Teillieferung für den Käufer im Rahmen des vertraglichen Bestimmungszwecks verwendbar ist,
 - die Lieferung der restlichen bestellten Ware sichergestellt ist (es sei denn, die endgültige Lieferung von nur Teilen der Lieferung ist für den Käufer ebenso verwendbar wie die gesamte Lieferung) und
 - dem Käufer hierdurch kein erheblicher Mehraufwand oder zusätzliche Kosten entstehen.

- Kommt der Käufer in Annahmeverzug, so sind wir berechtigt, Ersatz des entstehenden Schadens und etwaiger Mehraufwendungen zu verlangen. Gleiches gilt, wenn der Käufer Mitwirkungspflichten schuldhaft verletzt oder sich unsere Lieferung aus anderen, vom Käufer zu vertretenden Gründen verzögert.

V. Nutzung des Online Shops

- In unserem Online Shop erteilte Aufträge, welche vom Käufer selbst oder auch durch die Nutzer des Kundenkontos aufgegeben werden, sind rechtsgültige Kaufverträge. Handeln Dritte ohne bevollmächtigt zu sein, gilt dies nur, wenn der Käufer das Handeln des Dritten bei pflichtgemäßer Sorgfalt hätte erkennen und verhindern können und wir annehmen durften, der Käufer kenne und billige das Verhalten des Dritten. Der Käufer haftet für jede durch sein Verschulden ermöglichte unbefugte Benutzung seiner Nutzerdaten und damit entstandenen Kosten. Eine Annahmeverweigerung bzw. Rücklieferung der Aufträge kann zum Löschen der Benutzerdaten und damit zum Ausschluss von unserem Online Shop führen.
- Die Nutzung unserer Daten und Bilder – gleich ob diese urheberrechtlich, markenrechtlich oder sonst rechtlich geschützt sind – durch den Käufer ist nur im Falle unserer vorherigen schriftlichen Einwilligung gestattet.

VI. Gefahrübergang/ Lieferung

- Die Lieferung erfolgt ab Lager, wo auch der Erfüllungsort für die Lieferung und eine etwaige Nacherfüllung ist. Auf Verlangen und Kosten des Käufers wird die Ware an einen anderen Bestimmungsort versandt (Versendungskauf).
- Die Gefahr der zufälligen Verschlechterung oder des zufälligen Untergangs geht spätestens mit der Übergabe des Liefergegenstandes auf den Käufer über. Beim Versendungskauf geht jedoch die Gefahr des zufälligen Untergangs und der zufälligen Verschlechterung der Ware sowie die Verzögerungsgefahr bereits mit der Auslieferung (wobei der Beginn des Verladevorgangs maßgeblich ist) an den Spediteur, Frachtführer oder sonst zur Ausführung der Versendung bestimmten Person auf den Käufer über. Dies gilt auch dann, wenn Teillieferungen erfolgen oder wir noch andere Leistungen (zB. Versand) übernommen haben. Der Übergabe steht es gleich, wenn der Käufer im Verzug der Annahme ist. Verzögert sich der Versand oder die Übergabe infolge eines Umstandes, dessen Ursache beim Käufer liegt, geht die Gefahr von dem Tag an auf den Käufer über, an dem der Liefergegenstand versandbereit ist und der wir dies dem Käufer angezeigt haben.
- Verladung und Versand erfolgen unversichert. Auf Wunsch und Kosten des Käufers werden wir die Lieferung durch eine Transportversicherung absichern.
- Soweit nicht etwas anderes vereinbart ist, sind wir berechtigt, die Art der Versendung (insbesondere Transportunternehmen, Versandweg, Verpackung) selbst zu bestimmen. Wir werden uns auch dann bemühen, hinsichtlich Versandart und Versandweg Wünsche und Interessen des Käufers zu berücksichtigen; dadurch bedingte Mehrkosten – auch bei vereinbarter Frachtfreilieferung – gehen zu Lasten des Käufers.
- Wird der Versand auf Wunsch oder aus Verschulden des Käufers verzögert, so lagern wir die Waren auf Kosten und Gefahr des Käufers. In diesem Fall steht die Anzeige der Versand-bereitschaft dem Versand gleich.

VII. Gewährleistung

- Für die Rechte des Käufers bei Sach- und Rechtsmängeln (einschließlich Falsch- und Minderlieferung sowie unsachgemäßer Montage oder mangelhafter Montageanleitung) gelten die gesetzlichen Vorschriften, soweit nachfolgend nichts anderes bestimmt ist. In allen Fällen unberührt bleiben die gesetzlichen Sondervorschriften hinsichtlich des Lieferantenregresses (§§ 445a, 478 BGB).
- Grundlage unserer Mängelhaftung ist vor allem die über die Beschaffenheit der Ware und die vorausgesetzte Verwendung der Ware (einschließlich Zubehör und Anleitungen) getroffene Vereinbarung . Als Vereinbarung über die Beschaffenheit der Ware gelten alle Produktbeschreibungen, die Gegenstand des einzelnen Vertrages sind oder von uns (insbesondere in Katalogen oder auf unserer Internet-Homepage) öffentlich bekannt gemacht wurden.
- Bei Waren mit digitalen Elementen oder sonstigen digitalen Inhalten schulden wir eine Bereitstellung und ggf. eine Aktualisierung der digita-

len Inhalte nur, soweit sich dies ausdrücklich aus einer Beschaffenheitsvereinbarung gemäß Ziffer 2 ergibt. Für öffentliche Äußerungen Dritter übernehmen wir insoweit keine Haftung.

- Mangelsprüche des Käufers bestehen nur, wenn der Käufer seinen nach § 377 HGB geschuldeten Untersuchungs- und Rügepflichten ordnungsgemäß nachgekommen ist.
- Verschleiß o. Abnutzung in gewöhnlichem Umfang begründen keine Gewährleistungsansprüche.
- Soweit ein Mangel der Ware bei Gefahrenübergang vorliegt, sind wir zur Nacherfüllung verpflichtet, es sei denn, dass wir aufgrund der gesetzlichen Regelungen zur Verweigerung der Nacherfüllung berechtigt sind. Wir sind berechtigt, die geschuldete Nacherfüllung davon abhängig zu machen, dass der Käufer den fälligen Kaufpreis bezahlt. Der Käufer ist jedoch berechtigt, einen im Verhältnis zum Mangel angemessenen Teil des Kaufpreises zurückzubehalten. Der Käufer hat uns eine angemessene Frist zur Nacherfüllung zu gewähren. Die Nacherfüllung kann nach unserer Wahl durch Beseitigung des Mangels (Nachbesserung) oder Lieferung einer neuen Ware erfolgen. Wir tragen im Falle der Mangelbeseitigung die erforderlichen Aufwendungen in gesetzlicher Höhe, wenn tatsächlich ein Mangel vorliegt. Liegt kein Mangel vor, können wir vom Käufer die aus dem unberechtigten Mangelbeseitigungsverlangen entstandenen Kosten (insbesondere Prüf-, Ein-/Ausbau- und Transportkosten) ersetzt verlangen, es sei denn, die fehlende Mangelhaftigkeit war für den Käufer nicht erkennbar.
- Nur, wenn die Nacherfüllung fehlgeschlagen ist, kann der Käufer nach seiner Wahl Herabsetzung des Kaufpreises (Minderung) verlangen oder den Rücktritt vom Vertrag erklären. Bei einem unerheblichen Mangel besteht jedoch kein Rücktrittsrecht Die Nachbesserung gilt mit dem zweiten vergeblichen Versuch als fehlgeschlagen, soweit nicht aufgrund des Vertragsgegenstands weitere Nachbesserungsversuche angemessen und dem Käufer zumutbar sind.
- Gesetzliche Ansprüche des Käufers auf Schadensersatz bzw. Ersatz vergeblicher Aufwendungen bestehen auch bei Mängeln nur nach Maßgabe von VIII. und sind im Übrigen ausgeschlossen.
- Abweichend von § 438 Abs. 1 Nr. 3 BGB beträgt die allgemeine Verjährungsfrist für Ansprüche aus Sach- und Rechtsmängeln ein Jahr ab Ablieferung. Soweit eine Abnahme vereinbart ist, beginnt die Verjährung mit der Abnahme. Die Verjährungsverkürzung in Ziffer 9 Satz 1 gilt nicht (i) für Schäden aus der Verletzung des Lebens, des Körpers oder der Gesundheit, die auf einer vorsätzlichen oder fahrlässigen Pflichtverletzung unsererseits oder einer vorsätzlichen oder fahrlässigen Pflichtverletzung einer unserer gesetzlichen Vertreter oder Erfüllungsgehilfen beruhen sowie (ii) für Schäden, die auf einer vorsätzlichen oder grob fahrlässigen Pflichtverletzung unsererseits oder auf einer vorsätzlichen oder grob fahrlässigen Pflichtverletzung einer unserer gesetzlichen Vertreter oder Erfüllungsgehilfen beruhen. Die gesetzlichen Regelungen zum Lieferantenregress (insbesondere §§ 445b, 479 BGB) bleiben unberührt.

VIII. Haftung

- Soweit sich aus diesen Bedingungen einschließlich der nachfolgenden Bestimmungen nichts anderes ergibt, haften wir bei einer Verletzung von vertraglichen und außervertraglichen Pflichten nach den gesetzlichen Vorschriften.
- Auf Schadensersatz haften wir – gleich aus welchem Rechtsgrund – im Rahmen der Verschuldenshaftung bei Vorsatz und grober Fahrlässigkeit. Bei einfacher Fahrlässigkeit haften wir vorbehaltlich eines milderen Haftungsmaßstabs nach gesetzlichen Vorschriften (zB für Sorgfalt in eigenen Angelegenheiten) nur
 - a) für Schäden aus der Verletzung des Lebens, des Körpers oder der Gesundheit
 - b) für Schäden aus der nicht unerheblichen Verletzung einer wesentlichen Vertragspflicht (Verpflichtung, deren Erfüllung die ordnungsgemäße Durchführung des Vertrags überhaupt erst ermöglicht und auf deren Einhaltung der Vertragspartner regelmäßig vertraut und vertrauen darf); in diesem Fall ist unsere Haftung jedoch auf den Ersatz des vorhersehbaren, typischerweise eintretenden Schadens begrenzt.
- Die sich aus VIII. 2 ergebenden Haftungsbeschränkungen gelten auch bei Pflichtverletzungen durch bzw. zugunsten von Personen, deren Verschulden wir nach gesetzlichen Vorschriften zu vertreten haben. Sie gelten nicht für Ansprüche des Käufers nach dem Produkthaftungsgesetz und soweit wir einen Mangel arglistig verschwiegen oder eine Garantie

für die Beschaffenheit und/oder Haltbarkeit der Ware oder Teilen der Ware abgegeben haben.

4. Wegen einer Pflichtverletzung, die nicht in einem Mangel besteht, kann der Käufer nur zurücktreten oder kündigen, wenn wir die Pflichtverletzung zu vertreten haben. Ein freies Kündigungsrecht des Käufers wird ausgeschlossen. Im Übrigen gelten die gesetzlichen Voraussetzungen und Rechtsfolgen.

IX. Eigentumsvorbehalt

1. Bis zur Erfüllung aller Forderungen, einschließlich sämtlicher Saldoforderungen aus Kontokorrent, die uns gegen den Käufer jetzt oder zukünftig zustehen, bleibt die gelieferte Ware (Vorbehaltsware) unser Eigentum. Im Falle des vertragswidrigen Verhaltens des Käufers, z.B. Zahlungsverzug, sind wir berechtigt die Vorbehaltsware auf Grund des Eigentumsvorbehalts heraus zu verlangen. Das Herausgabeverlangen beinhaltet nicht zugleich die Erklärung des Rücktritts; wir sind vielmehr berechtigt, lediglich die Ware heraus zu verlangen und uns den Rücktritt vorzubehalten. Zahlt der Käufer den fälligen Kaufpreis nicht, dürfen wir diese Rechte nur geltend machen, wenn wir dem Käufer zuvor erfolglos eine angemessene Frist zur Zahlung gesetzt haben oder eine derartige Fristsetzung nach den gesetzlichen Vorschriften entbehrlich ist. Nehmen wir die Vorbehaltsware zurück, stellt dieses einen Rücktritt vom Vertrag dar. Die für die Rücknahme anfallenden Transportkosten trägt der Käufer. Pfänden wir die Vorbehaltsware, ist dies ein Rücktritt vom Vertrag. Wir sind berechtigt, die Vorbehaltsware nach der Rücknahme zu verwerten. Nach Abzug eines angemessenen Betrages für die Verwertungskosten, ist der Verwertungserlös mit den uns vom Käufer geschuldeten Beträgen zu verrechnen.
2. Der Käufer hat die Vorbehaltsware pfleglich zu behandeln und diese auf seine Kosten gegen Feuer-, Wasser- und Diebstahlschäden ausreichend zum Neuwert zu versichern. Wartungs- und Inspektionsarbeiten, die erforderlich werden, sind vom Käufer auf eigene Kosten rechtzeitig durchzuführen.
3. Der Käufer ist berechtigt, die Vorbehaltsware im ordnungsgemäßen Geschäftsverkehr zu veräußern und/oder zu verwenden, solange er nicht in Zahlungsverzug ist. Verpfändungen oder Sicherungsübereignungen an Dritte vor vollständiger Bezahlung der gesicherten Forderungen sind unzulässig. Die aus dem Weiterverkauf oder einem sonstigen Rechtsgrund (Versicherung, unerlaubte Handlung) bezüglich der Vorbehaltsware entstehenden Forderungen (einschließlich sämtlicher Saldoforderungen aus Kontokorrent) tritt der Käufer bereits jetzt sicherungshalber in vollem Umfang an uns ab; wir nehmen die Abtretung hier-mit an. Wir ermächtigen den Käufer widerruflich, die an uns abgetretenen Forderungen für dessen Rechnung im eigenen Namen einzuziehen. Unser Recht, diese Forderungen selbst einzuziehen, wird dadurch nicht berührt; allerdings werden wir die Forderungen nicht selbst geltend machen und die Einzugsermächtigung nicht widerrufen, solange der Käufer seinen Zahlungsverpflichtungen ordnungsgemäß nachkommt. Sofern sich der Käufer jedoch vertragswidrig verhält – insbesondere sofern er mit der Zahlung einer Entgeltforderung in Verzug gekommen ist –, können wir vom Käufer verlangen, dass dieser uns die abgetretenen Forderungen und die jeweiligen Schuldner bekannt gibt, den jeweiligen Schuldnern die Abtretung mitteilt und uns alle Unterlagen aushändigt sowie alle Angaben macht, die wir zur Geltendmachung der Forderungen benötigen.
4. Eine Abtretung der nach Ziffer 3 an uns abgetretenen Forderungen ist unzulässig, es sei denn, es handelt sich um eine Abtretung im Wege des echten Factoring, die uns angezeigt wird und bei welcher der Factoring-erlös den Wert unserer gesicherten Forderung übersteigt. Mit der Gutschrift des Factoringerlöses wird unsere Forderung sofort fällig.
5. Eine Verarbeitung oder Umbildung der Vorbehaltsware durch den Käufer wird in jedem Fall für uns vorgenommen. Sofern die Vorbehaltsware mit anderen, uns nicht gehörenden Sachen verarbeitet wird, erwerben wir das Miteigentum an der neuen Sache im Verhältnis des Wertes der Vorbehaltsware (Rechnungsendbetrag inklusive der Mehrwertsteuer) zu den anderen verarbeiteten Sachen im Zeitpunkt der Verarbeitung. Für die durch Verarbeitung entstehende neue Sache gilt das Gleiche wie für die Vorbehaltsware. Im Falle der untrennbaren Vermischung oder Verbindung der Vorbehaltsware mit anderen, uns nicht gehörenden Sachen erwerben wir Miteigentum an der neuen Sache im Verhältnis des Wertes der Vorbehaltsware (Rechnungsendbetrag inklusive der Mehrwertsteuer) zu den anderen vermischten oder verbundenen Sachen im Zeitpunkt der Vermischung oder Verbindung. Ist die Sache des Käufers in Folge der

Vermischung oder Verbindung als Hauptsache anzusehen, sind der Käufer und wir uns einig, dass der Käufer uns anteilmäßig Miteigentum an dieser Sache überträgt; die Übertragung nehmen wir hiermit an. Unser so entstandenes Allein- oder Miteigentum an einer Sache verwahrt der Käufer unentgeltlich für uns.

6. Bei Zugriffen Dritter auf die Vorbehaltsware, insbesondere Pfändungen, wird der Käufer unverzüglich auf unser Eigentum hinweisen und uns unverzüglich schriftlich benachrichtigen, damit wir unsere Eigentumsrechte durchsetzen können. Soweit der Dritte nicht in der Lage ist, uns die in diesem Zusammenhang entstehenden gerichtlichen oder außergerichtlichen Kosten zu erstatten, haftet hierfür der Käufer.
7. Der Käufer hat uns unverzüglich schriftlich zu benachrichtigen, wenn ein Antrag auf Eröffnung eines Insolvenzverfahrens gestellt wird.
8. Wir sind verpflichtet, auf Verlangen des Käufers, die uns zustehenden Sicherheiten in-soweit freizugeben, als der realisierbare Wert unserer Sicherheiten die zu sichernden Forderungen um mehr als 10 % übersteigt, dabei obliegt uns die Auswahl der freizugebenden Sicherheiten.

X. Warenrücknahme

1. Eine Rücknahme von verkaufter Ware außerhalb berechtigter Gewährleistungsansprüche ist grundsätzlich ausgeschlossen. Falls wir die Ware aus vom Käufer zu vertretenden Gründen zurückzunehmen, ist der Käufer verpflichtet, uns alle entstehenden Kosten zu ersetzen und uns außerdem insbesondere eine angemessene Entschädigung für die durch den Gebrauch entstandene Wertminderung zu zahlen sowie uns auch den durch die Rücknahme entgangenen Gewinn zu ersetzen. Etwaige weitergehende gesetzliche Ansprüche unsererseits bleiben unberührt. Der Käufer ist damit einverstanden, dass wir in Höhe der uns entstehenden Forderung gegen bereits gezahlte Kaufpreisraten insoweit aufrechnen.
2. Vereinzelt kann nach vorheriger schriftlicher Vereinbarung die Rücknahme von Waren vereinbart werden. Voraussetzung hierfür ist, dass die retournierte Ware vollständig, unbeschädigt und originalverpackt ist. Die Kosten und das Risiko für die Anlieferung trägt der Käufer. Für die Bearbeitung von Retouren behalten wir uns eine Bearbeitungs- und Wieder-einlagerungsgebühr in Höhe von 20 % des Kaufpreises, mindestens jedoch 50,00 € vor.

XI. Gerichtsstand, anzuwendendes Recht, Sonstiges

1. Ausschließlicher – auch internationaler Gerichtsstand für alle sich aus dem Vertragsverhältnis unmittelbar oder mittelbar ergebenden Streitigkeiten ist das für Schweinfurt, Deutschland, zuständige Gericht. Wir sind jedoch berechtigt, den Käufer auch an seinem allgemeinen Gerichtsstand zu verklagen. Vorrangige gesetzliche Vorschriften, andere zu ausschließlichen Zuständigkeiten, bleiben unberührt.
2. Die Beziehungen zwischen den Vertragsparteien regeln sich ausschließlich nach dem in der Bundesrepublik Deutschland geltenden Recht. Die Anwendung des einheitlichen Gesetzes über den internationalen Kauf beweglicher Sachen sowie des Gesetzes über den Abschluss von internationalen Kaufverträgen über bewegliche Sachen ist ausgeschlossen.
3. Der Käufer nimmt davon Kenntnis, dass wir Daten aus dem Vertragsverhältnis nach § 28 Bundesdatenschutzgesetz zum Zwecke der Datenverarbeitung speichern und uns das Recht vorbehalten, die Daten, soweit für die Vertragserfüllung erforderlich, Dritten (zB. Versicherungen) zu übermitteln.
4. Sollte eine oder mehrere dieser Bestimmungen unwirksam oder undurchführbar sein oder werden, wird die Wirksamkeit der übrigen Bestimmungen nicht berührt.



GENERAL TERMS AND CONDITIONS OF ACCELL

(VERSION 9. APRIL 2024)

I. Scope

1. The following Terms of Sale apply to all contracts concluded between the Purchaser and us for the delivery of goods. They shall also apply to all future business relations, even if they are not expressly stipulated again. Unless otherwise agreed, the Terms of Sale apply in the valid version at the time of the order of the Purchaser or in any case in the version last notified to it in writing as a framework agreement, including for similar future contracts, without us having to make reference thereto again in each individual case.
2. Deviating, conflicting or supplementary conditions of the Purchaser, which we do not expressly recognize, are non-binding for us, even if we do not expressly object to them. The following Terms of Sale apply exclusively even if we carry out the Purchaser's order without reservation in the knowledge of conflicting or deviating terms and conditions of the Purchaser.
3. Individual agreements made with the Purchaser in individual cases (including ancillary agreements, addenda and amendments) shall always take precedence over these Terms. A written contract or our written confirmation shall be decisive for the content of such agreements, subject to evidence to the contrary.

II. Offer, Conclusion of Contract and Confidentiality

1. We can accept an order from the Purchaser that qualifies as an offer to enter into a sales contract within two weeks by sending an order confirmation or by sending the ordered products within the same period.
2. Our offers are subject to change and non-binding, unless we have expressly designated them as binding.
3. We reserve our property rights, copyrights and other industrial property rights to all illustrations, calculations, drawings and other documents. The Purchaser may only disclose, make accessible to third parties, use or reproduce these itself or through third parties as such or in terms of their content with our consent, regardless of whether we have marked them as confidential. At our request, the Purchaser must return these items to us in full and destroy any copies that may have been made if it no longer requires them in the ordinary course of business or if negotiations do not lead to the conclusion of a contract. An exception to this is the storage of data made available electronically for the purposes of standard data backup.

III. Payment Terms

1. Unless otherwise specified in the order confirmation, our prices apply ex works without packaging and, in the case of export deliveries, plus customs, fees and other public duties. Our prices do not include statutory value-added tax. We will state this separately in the invoice at the statutory rate on the day of invoicing.
2. If, in the case of a mail order purchase (VI. 1.), we do not charge the transport costs actually incurred in the individual case, a flat-rate fee for transport costs applies (excluding any transport insurance within the meaning of VI.3). The Purchaser can find the amount of this flat-rate transport fee in the applicable terms agreement.
3. Invoices of Engelbert Wiener Bike Parts GmbH are payable within 10 days of the invoice date less a 2% discount, or without deduction within 30 days of the invoice date and delivery of the goods. Amounts below 25 Euro are payable without any discount. Invoices from all other companies of the Accell Group are payable within 10 days of the invoice date less a 0.5% discount, in the case of direct debit (SEPA) within 10 days of the invoice date less a further 0.5% discount, or without deduction within 30 days of the invoice date and delivery of the goods. In all cases, the discount may only be deducted if all payment obligations from previous deliveries have been completely fulfilled. We are entitled, including as part of an ongoing business relationship, to only carry out a delivery against advance payment at any time in whole or in part. We shall declare a corresponding retention at the latest with the order confirmation. The timeliness of the payment is determined by the receipt by us. Payment by check is excluded unless agreed separately in individual cases.
4. The Purchaser shall be in default upon expiry of the above payment period. The purchase price shall bear interest during the default at the

respectively applicable statutory default interest rate. We reserve the right to claim further default damages. Vis-à-vis merchants, our claim to the commercial default interest (Section 353 of the German Commercial Code (HGB)) remains unaffected.

5. The Purchaser shall only be entitled to set-off or retention rights insofar as its claim is legally established or is undisputed. In case of defects of the delivery, the counterrights of the Purchaser shall remain unaffected, in particular in accordance with VII. 6. We have the right to demand advance payments and the provision of security if, after conclusion of the contract, facts become known that call into question the reliability of the Purchaser, in particular its solvency. We are entitled to rescind the contract if the Purchaser has provided false or incomplete information about facts concerning its creditworthiness. Compensation claims of the Purchaser from this rescission are excluded. Our statutory rights of retention and rescission remain unaffected.
6. Insofar as the agreed prices are based on list prices and the delivery is to take place more than four months after the conclusion of the contract, our list prices valid at the time of delivery apply (in each case minus an agreed percentage or fixed discount), without the Purchaser having a right of rescission, unless otherwise previously agreed. If the price increases by more than 5%, the Purchaser shall have a right of rescission.

IV. Delivery and Performance Periods

1. Periods and dates for deliveries and services promised by us are always only approximate, unless a fixed period or a fixed date has been expressly promised or agreed. If shipment has been agreed, delivery periods and delivery dates refer to the time of handover to the forwarding agent, carrier or other third party commissioned with the transport. The Purchaser must duly fulfill all its obligations and in a timely manner.
2. If we cannot meet binding delivery deadlines for reasons for which we are not responsible (impossibility of performance), we will promptly notify the Purchaser and simultaneously communicate the expected new delivery time. If the performance is not possible within the new delivery period as well, we are entitled to withdraw from the contract in whole or in part; we will refund any consideration already paid by the Purchaser without undue delay. The impossibility of performance in this sense shall be deemed in particular to be late deliveries by our suppliers if we have entered into a congruent covering transaction, neither we nor our suppliers are at fault, or we are not subject to a procurement obligation in the individual case.
3. The occurrence of our delay in delivery shall be governed by the statutory provisions. In any case, a reminder of the Purchaser is necessary. If a non-binding delivery date or such a period is exceeded, the Purchaser must first request us to deliver within a period of at least six weeks; only then will we be in default.
4. The rights of the Purchaser in accordance with section VIII. of these Terms and our statutory rights, particularly in the event of an exclusion of performance obligation (e.g. due to impossibility or unreasonableness of performance and/or subsequent performance) shall remain unaffected.
5. We are entitled to render partial deliveries and partial services at any time if
 - the partial delivery can be used by the Purchaser within the scope of the contractual purpose,
 - the delivery of the remaining ordered goods is ensured (unless the final delivery of only parts of the delivery is just as usable for the Purchaser as the entire delivery) and
 - the Purchaser does not incur any significant additional work or additional costs as a result.
6. If the Purchaser is in default of acceptance, we are entitled to demand compensation for the damage incurred and any additional expenses. The same applies if the Purchaser culpably breaches its duty to cooperate or our delivery is delayed for other reasons for which the Purchaser is responsible.

V. Use of the Online Shop

1. Orders placed in our online shop, which are placed by the Purchaser itself or else by the users of the customer account, are legally valid purchase contracts. In the event that third parties act without authorization, this

only applies if the Purchaser could have recognized and prevented the actions of the third party with due diligence and we could assume that the Purchaser knew and approved of the behavior of the third party. The Purchaser is liable for any unauthorized use of its user data made possible through its fault and the costs incurred as a result. A refusal of acceptance or return of the orders can lead to the deletion of user data and thus to exclusion from our online shop.

2. The use of our data and images – regardless of whether they are copyrighted, trademarked or otherwise legally protected – by the Purchaser is only permitted with our prior written consent.

VI. Transfer of Risk/Delivery

1. Delivery is from warehouse, which is also the place of performance for the delivery and any subsequent performance. At the request and expense of the Purchaser, the goods will be sent to another destination (mail order purchase).
2. The risk of accidental deterioration or accidental loss passes to the Purchaser at the latest when the delivery item is handed over. However, in mail order purchases, the risk of accidental loss and accidental deterioration of the goods as well as the risk of delay already passes upon delivery of the goods (with the start of the loading process being decisive) to the forwarding agent, the carrier or other individual intended to execute the shipment. This applies even if partial deliveries are made or if we have taken over other services (e.g. shipping). It is equivalent to handover if the Purchaser is in default of acceptance. If shipping or the handover is delayed as a result of a circumstance for which the Purchaser is responsible, the risk passes to the Purchaser from the day on which the delivery item is ready for shipment and we have notified the Purchaser of this.
3. Loading and shipping are uninsured. At the request and expense of the Purchaser, we will secure the delivery with transport insurance.
4. Unless otherwise agreed, we are entitled to determine the type of shipment (in particular transport company, shipping, packaging). We will then endeavor to take into account the wishes and interests of the Purchaser with regard to the type and route of shipment; any additional costs caused by this – even if freight-free delivery has been agreed – shall be borne by the Purchaser.
5. If shipment is delayed at the request of or through the fault of the Purchaser, we will store the goods at the Purchaser's expense and risk. In this case, the notification of readiness for shipment is equivalent to shipment.

VII. Warranty

1. The statutory provisions shall apply to the Purchaser's rights in the event of material defects and defects of title (including incorrect and short deliveries as well as improper assembly or defective assembly instructions), unless otherwise specified below. In all cases, the special statutory provisions regarding supplier recourse (Sections 445a, 478 of the German Civil Code (BGB)) remain unaffected.
2. The basis of our liability for defects is primarily the agreements reached on the quality of the goods and the assumed use of the goods (including accessories and instructions). All product descriptions that are the subject of the individual contract or that have been made public by us (especially in catalogs or on our Internet homepage) are deemed to be an agreement on the quality of the goods.
3. For goods with digital elements or other digital contents, we owe provision and, where applicable, updates of the digital contents only if this expressly arises from a quality agreement in accordance with section 2. We assume no liability for public statements by third parties.
4. Claims for defects on the part of the Purchaser only exist if the Purchaser has properly complied with its obligations to examine and give notice of defects in accordance with Section 377 HGB.
5. Normal wear and tear does not justify any warranty claims.
6. If there is a defect in the goods at the time of the transfer of risk, we are obliged to render subsequent performance, unless we are entitled to refuse subsequent performance on the basis of statutory provisions. We are entitled to make the subsequent performance owed dependent on the Purchaser paying the purchase price due. However, the Purchaser is entitled to retain a reasonable portion of the purchase price relative to the defect. The Purchaser must grant us a reasonable period of time for subsequent performance. We can choose to rectify the defect by eliminating the defect (rectification) or by delivering new goods. In the event of rectification of a defect, we shall bear the necessary expenses in the statutory amount if there is actually a defect. If there is no defect, we can

require the reimbursement of the costs incurred from the unauthorized request for the remedy of defects from the Purchaser (in particular testing, installation/removal and transport costs), unless the lack of defects could not be detected by the Purchaser.

7. The Purchaser can only demand a reduction in the purchase price (reduction) or declare rescission of the contract if the subsequent performance has failed. In the case of an insignificant defect, however, there is no right of rescission. The rectification is deemed to have failed after the second unsuccessful attempt, unless further attempts at rectification are appropriate and reasonable for the Purchaser due to the subject matter of the contract.
8. Statutory claims of the Purchaser for damages or compensation of wasted expenditures exist even for defects only in accordance with VIII., and are otherwise excluded.
9. Notwithstanding Section 438 para. 1 no. 3 BGB, the general statute of limitations for claims from material and legal defects shall be one year from delivery. If acceptance has been agreed, the limitation period begins with the acceptance. The shortening of the statute of limitations in section 9 sentence 1 shall not apply (i) to claims for damage resulting from injury to life, body or health that is due to an intentional or negligent breach of duty on our part or an intentional or negligent breach of duty by a legal representative or vicarious agent of ours, and (ii) to damage due to an intentional or grossly negligent breach of duty on our part or an intentional or grossly negligent breach of duty by a legal representative or vicarious agent of ours. The statutory provisions on supplier recourse (especially Sections 445b, 479 BGB) remain unaffected.

VIII. Liability

1. Unless otherwise provided in these Terms, including the following provisions, we are liable for any breach of contractual and non-contractual obligations under the statutory provisions.
2. For damages we are liable – for whatever legal reason – within the framework of fault-based liability for intent and gross negligence. In cases of simple negligence, we are liable, subject to a milder liability standard according to statutory provisions (e.g. for care in own affairs), only
 - a) for damages resulting from injury to life, limb or health,
 - b) for damages resulting from the significant breach of a material contractual obligation (an obligation whose fulfillment enables the proper performance of this contract in the first place, and upon the fulfillment of which the contracting party regularly relies and may rely); in this case, our liability is limited to compensation for the foreseeable, typically occurring damage.
3. The limitations of liability resulting from VIII. 2 also apply to breaches of duty by or for the benefit of persons whose negligence we are liable for in accordance with the statutory provisions. They do not apply to claims by the Purchaser under the German Product Liability Act and insofar as we have fraudulently concealed a defect or have given a guarantee for the quality and/or durability of the goods or parts of the goods.
4. Due to a breach of duty that does not consist of a defect, the Purchaser may only rescind or terminate the contract if we are responsible for the breach of duty. A free right of termination of the Purchaser is excluded. In other respects, the statutory requirements and legal consequences shall apply.

IX. Retention of Title

1. The delivered goods (reserved goods) remain our property until all claims have been settled, including all current account balance claims that we are entitled to against the Purchaser now or in the future. In the event that the Purchaser behaves in breach of contract, e.g. through default in payment, we are entitled to demand the return of the reserved goods on the basis of the retention of title. The demand for surrender does not simultaneously mean a declaration of withdrawal; rather, we are entitled to reclaim the goods and reserve the right to withdraw. If the Purchaser fails to pay the purchase price due, we may assert these rights only if we have previously unsuccessfully extended a reasonable period to the Purchaser for payment or such a deadline is dispensable according to the statutory provisions. If we take back the reserved goods, this constitutes a rescission of the contract. The Purchaser bears the transport costs incurred for the return. If we seize the reserved goods, this is a rescission of the contract. We are entitled to utilize the reserved goods after taking them back. After deducting an appropriate amount for the costs of utilization, the proceeds of the utilization are to be offset against the amounts owed to us by the Purchaser.

2. The Purchaser must treat the reserved goods with care and insure them adequately at replacement value against fire, water and theft damage at its own expense. Maintenance and inspection work that becomes necessary must be carried out in good time by the Purchaser at its own expense.
3. The Purchaser is entitled to sell and/or use the reserved goods in the ordinary course of business as long as it is not in default of payment. Pledges or assignments as security to third parties before the secured claims have been paid in full are not permitted. The Purchaser hereby assigns to us in advance as security in full the claims arising from the resale or any other legal reason (insurance, tort) with regard to the reserved goods (including all balance claims from current accounts); we hereby accept the assignment. We revocably authorize the Purchaser to collect the claims assigned to us for its account in its own name. This does not affect our right to collect these claims ourselves; however, we will not assert the claims ourselves and will not revoke the direct debit authorization as long as the Purchaser duly meets its payment obligations. However, if the Purchaser behaves in breach of contract – in particular if it is in default with the payment of a claim for remuneration – we can demand that the Purchaser informs us of the assigned claims and the respective debtors, informs the respective debtors of the assignment and hands over all documents to us and provides all information that we need to assert the claims.
4. An assignment of the claims assigned to us under section 3 is not permitted, unless it is an assignment by way of genuine factoring, which is reported to us and in which the factoring proceeds exceed the value of our secured claim. Our claim becomes due immediately when the factoring proceeds are credited.
5. Any processing or transformation of the reserved goods by the Purchaser will be carried out for us in any case. If the reserved goods are processed with other items that do not belong to us, we acquire co-ownership of the new item in proportion to the value of the reserved goods (final invoice amount including value-added tax) to the other processed items at the time of processing. The same applies to the new item created through processing as for the reserved goods. If the reserved goods are inseparably mixed or combined with other items that do not belong to us, we acquire co-ownership of the new item in proportion to the value of the reserved goods (final invoice amount including value-added tax) to the other mixed or combined items at the time of mixing or combination. If the Purchaser's item is to be regarded as the main item as a result of the mixing or combination, the Purchaser and we agree that the Purchaser transfers proportionate co-ownership of this item to us; we hereby accept the transfer. The Purchaser shall keep our resulting sole or joint ownership of an item for us free of charge.
6. In the event of access by third parties to the reserve goods, in particular seizures, the Purchaser will disclose our ownership without undue delay and notify us in writing without undue delay so that we can enforce our property rights. If the third party is unable to reimburse us for the judicial or extrajudicial costs incurred in this connection, the Purchaser is liable for these.
7. The Purchaser must inform us without undue delay in writing if an application for the opening of insolvency proceedings is filed.
8. At the request of the Purchaser, we are obliged to release the collateral to which we are entitled if the realizable value of our collateral exceeds the claims to be secured by more than 10%. We are responsible for selecting the collateral to be released.

X. Return of Goods

1. A return of sold goods outside of justified warranty claims is fundamentally excluded. If we take back the goods for reasons for which the Purchaser is responsible, the Purchaser is obliged to reimburse us for all costs incurred and, in particular, to pay us reasonable compensation for the reduction in value caused by use as well as the profit lost through the taking back. Any further statutory claims on our part shall remain unaffected. The Purchaser agrees that we shall offset the amount of the claim against the purchase price installments already paid.
2. In individual cases, the return of goods can be agreed after prior written agreement. The prerequisite for this is that the returned goods are complete, undamaged and in their original packaging. The Purchaser bears the cost and risk of delivery. For the processing of returns, we reserve the right to charge a processing and restocking fee of 20% of the purchase price, but at least €50.00.

XI. Jurisdiction, Applicable Law, Miscellaneous

1. The exclusive – including international – place of jurisdiction for all disputes directly or indirectly arising from the contractual relationship is the court competent for Schweinfurt, Germany. However, we are also entitled to sue the Purchaser at its general place of jurisdiction. Overriding statutory provisions, especially concerning exclusive jurisdiction, shall remain unaffected.
2. The relationships between the contracting parties are governed exclusively by the law applicable in the Federal Republic of Germany. The application of the uniform law on the international purchase of movable property and the law on the conclusion of international sales contracts for movable property is excluded.
3. The Purchaser acknowledges that we store data from the contractual relationship in accordance with Section 28 of the German Federal Data Protection Act for the purpose of data processing and that we reserve the right to pass the data on to third parties (e.g. insurance companies), to the extent this is necessary for the performance of the contract.
4. If one or more of these Terms should be or become invalid or unenforceable, the validity of the remaining Terms shall not be affected.



IMPRINT

Alle Angaben der GHOST-Bikes GmbH wie Preise, Größen, Gewichte, Farben einschließlich Lieferzeiten und/oder sonstigen Angaben erfolgen mit größter Sorgfalt. Die GHOST-Bikes GmbH übernimmt keine Gewähr für mögliche Abweichungen. Offensichtliche Fehler oder Irrtümer im Katalog sind für die GHOST-Bikes GmbH nicht bindend. Alle Preise sind unverbindliche Preisempfehlungen inklusive der gesetzlichen MwSt.

FOTOS

Lapierre, Ugo Richard, Paul Humber, JB Liautard, Pierre Vieira

DANK AN

Alle Mitarbeitenden von LAPIERRE – jede:n Einzelne:n in unserer einmaligen Firma - die ein Teil dieses langen und manchmal auch harten Entwicklungsprozesses unserer Produkte waren, die wir nun mit Stolz präsentieren.

Irrtümer, Änderungen und Druckfehler vorbehalten.
Bilder können vom Original abweichen.

GHOST-Bikes GmbH ist ein Mitglied der ACCELL GROUP.

© 2025 GHOST Bikes

Unter Umständen sind nicht alle in diesem Katalog gezeigten Produkte in allen Regionen erhältlich, bitte kontaktiere dazu dein Vertriebsteam.

Weiterführende Informationen und Neuigkeiten findest Du unter www.ghost-bikes.com.

All representations made by GHOST-Bikes GmbH regarding numbers, sizes, weights, colours including delivery times and/or other specifications are made with care. GHOST-Bikes GmbH does not guarantee that there will not be any deviations. Obvious mistakes or errors in the catalogue are not binding on GHOST-Bikes GmbH. All prices are recommended retail prices incl. VAT.

PHOTOS

Lapierre, Ugo Richard, Paul Humber, JB Liautard, Pierre Vieira

THANKS TO

All employees of LAPIERRE – to each one of you in our unique company who was a part of this long and sometimes difficult development process of our products which we now proudly present.

We are not liable for errors, changes or misprints.
Images might not represent the original.

GHOST-Bikes GmbH is a member of ACCELL GROUP.

© 2025 GHOST Bikes

Under certain circumstances, not all of the products shown in this catalogue might be available in all regions. Please contact your sales department for more information.

For more detailed information and other news, please visit our website at www.ghost-bikes.com.

GHOST-Bikes GmbH

An der Tongrube 3
95652 Waldsassen
Germany

Tel: +49 (9632) 9255-0
Fax: +49 (9632) 9255-116
Email: info@ghost-bikes.de
Web: ghost-bikes.com

LAPIERRE



4 055149 633349

LAPIERRE Dealerbook - D/E 2026
Art.-Nr. 9990090115

NO LIMITS. JUST PEAKS.